














Use your QR Code reader
to watch a video or visit
www.youtube.com/windwarddesign

	Qty.	Description	Picture
A	1	Table Top	
B	4	Legs	
C	1	Center Ring w/ Umbrella Hole	
D	1	Center Ring, empty	
E	8	Bolts	
F	8	Washers	
G	8	Nuts	
H	4	Bolts	
I	4	Lock Washer	
J	4	Flat Washer	

You will need:

1/2" Wrench
1/2" Socket Wrench
7/16" Socket Wrench

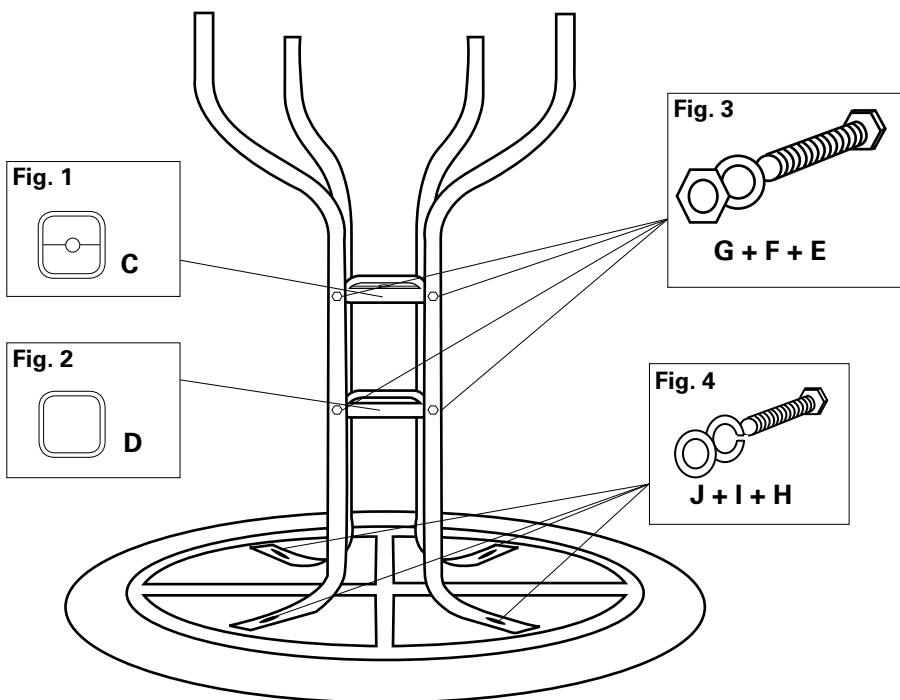

Step 1

To start, check that you have all of the listed parts and that you have all the necessary tools. Place the table top (A) face down on a soft, clean surface.



Step 2

Remove all the bolts (E), nuts (G) and washers (F) that are in each leg and set to the side.



Step 3

Take one leg (B) and the empty center ring (D) and snap the leg onto the corner of the ring, lining up the holes. Using the bolt, nut and washer you took out in step two, loosely hand tighten the leg and center ring together.



Step 4

Repeat for two more legs. Then slide in the center ring with an umbrella hole (C) and hand tighten the bolts (E), nuts (G) and washers (F). Once both rings are in place, add the fourth leg and secure into place.



Step 5

Go back through and tighten all of the bolts with a 1/2" wrench and socket wrench. Place your assembled base onto your table top.



Step 6

Line up the oblong shaped holes on the base with the inserts found on your top. Secure the top into place using a 7/16" socket wrench with the bolts (H), flat washer (J) & lock washer (K) see fig. 4. **Important: just barely hand tighten.**











GLASS DINING TABLE KD ASSEMBLY INSTRUCTIONS



Use your QR Code reader
to watch a video or visit
www.youtube.com/windwarddesign

Parts Included:

	Qty.	Description	Picture
A	1	Table Top	
B	4	Legs	
C	1	Center Ring w/ Umbrella Hole	
D	4	Bolts	
E	4	Washers	
F	4	Nuts	
G	4	Rim Clips	
H	4	Self Tapping Screws	


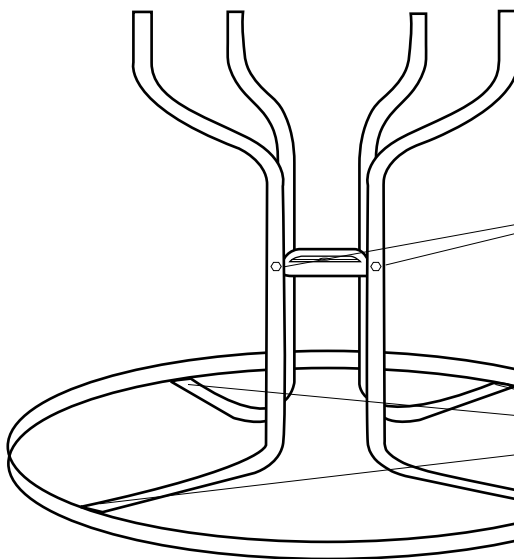


Fig. 1 (x4)



F + E + D

Fig. 2



G + H

You will need:

1/2" Wrench
1/2" Socket Wrench
5/16" Hex Driver & Power Drill




Step 1

To start, check that you have all of the listed parts and that you have all the necessary tools. Place the table top (A) face down on a soft, clean surface.



Step 2

Remove all the bolts (D), nuts (F) and washers (E) that are in each leg and set to the side.

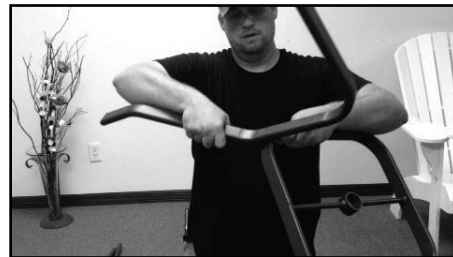

Step 3

Take one leg (B) and the center ring (C) and snap the leg onto the corner of the ring, lining up the holes. Using the bolt, nut and washer you took out in step two, loosely hand tighten the leg and center ring together.



Step 4

Repeat for all four legs. Go back through and tighten all of the bolts with a 1/2" wrench and socket wrench. Place your assembled base onto your table top.



Step 5

Place the rim clip (G) between the table leg and the lip of the table.




Step 6

Using a power drill with a 5/16" hex driver, drill the self tapping screw (H) through the rim clip and leg. Repeat step 5 & 6 for the three other legs.

Parts Included:

	Qty.	Description	Picture
A	1	Table Top	
B	4	Legs	
C	1	Center Ring w/ Umbrella Hole	
D	4	Bolts	
E	4	Washers	
F	4	Nuts	
G	4	Screws	

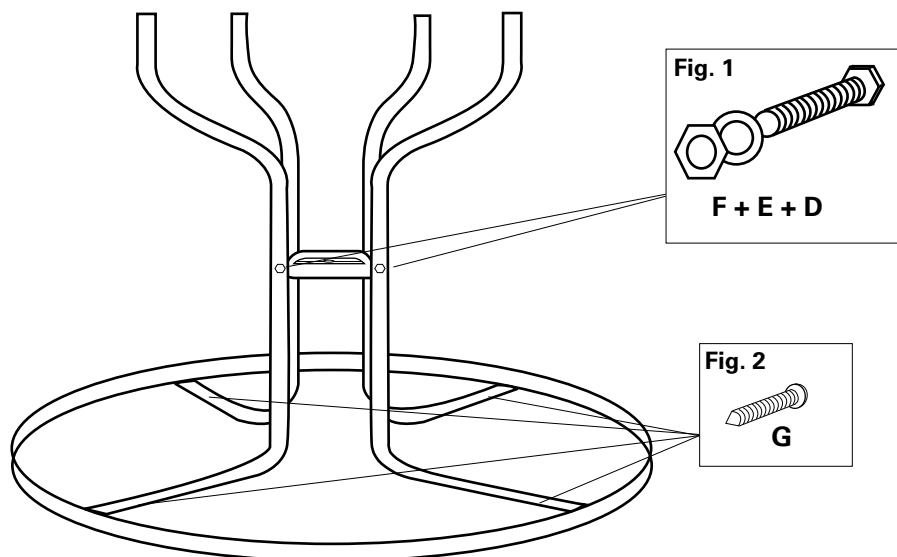

You will need:

1/2" Wrench
1/2" Socket Wrench
Cordless Drill




Step 1

To start, check that you have all of the listed parts and that you have all the necessary tools. Place the table top (A) face down on a soft, clean surface.



Step 2

Remove all the bolts (D), nuts (F) and washers (E) that are in each leg and set to the side.

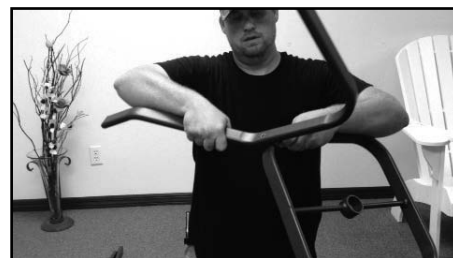


Step 3

Take one leg (B) and the center ring (C) and snap the leg onto the corner of the ring, lining up the holes. Using the bolt, nut and washer you took out in step two, loosely hand tighten the leg and center ring together.




Step 4

Repeat for all four legs. Go back through and tighten all of the bolts with a 1/2" wrench and socket wrench. Place your assembled base onto your table top.

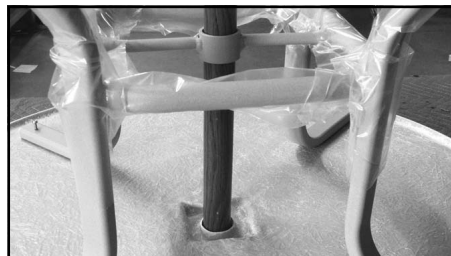

Step 5

To center the base on the top, insert something long and straight through the umbrella hole in the base to the umbrella hole on the top. In this example we have used an umbrella pole.

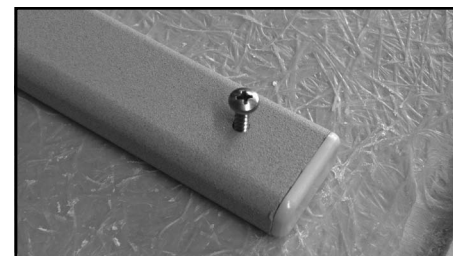

Step 6

The table legs will already have holes where the screws should go. Once the base is centered, place the screws (G) into the holes and drill into the top, attaching the base.