



## MGP FIRE PITS



Use your QR Code reader  
to watch a video or visit  
[www.youtube.com/windwarddesign](http://www.youtube.com/windwarddesign)

### **You will need:**

7/16" Wrench  
Clean Blanket  
(1) AAA Battery (not included)


### **Parts Included:**

	Qty.	Description	Picture
<b>A</b>	1	Table Top	
<b>B</b>	1	Base	
<b>C</b>	4	Bolts (1/4 20)	
<b>D</b>	1	Propane Dolly	
<b>L</b>	1	Fire Bowl Kit	
<b>M</b>	1	Wind Guard Kit (sold separately)	




### **Fire Bowl Kit Includes:**

	Qty.	Description
<b>E</b>	1	Stainless Steel Bowl
<b>F</b>	1	Black Rubber Propane Hose
<b>G</b>	1	Metal Flex-Line Hose
<b>H</b>	2	Bags of Clear Glass Stones

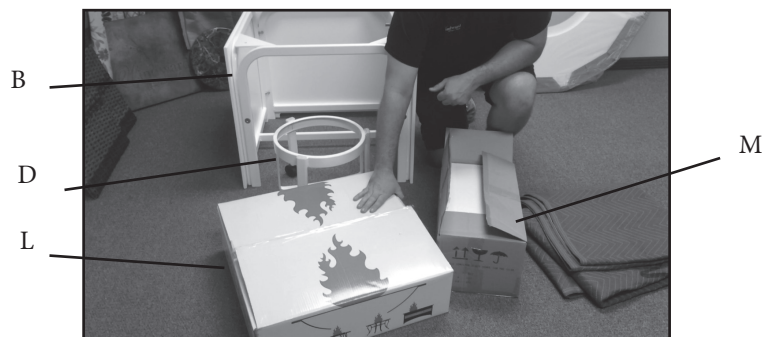


### **Step 1**

Your fire pit comes in two boxes, the first box contains your table top and the second box will contain everything else. Open your boxes and make sure you have everything.

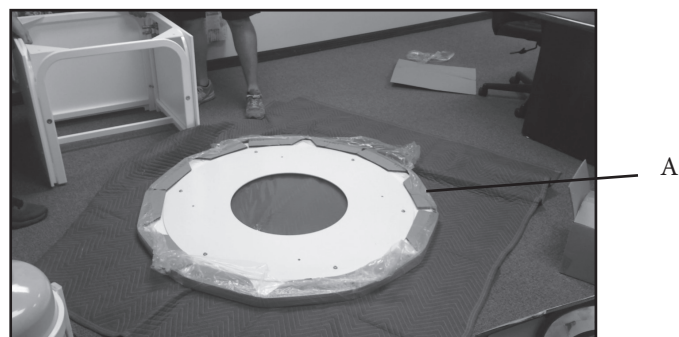

### **Step 2**

Set the table top facing down onto a soft clean surface, preferably a blanket.

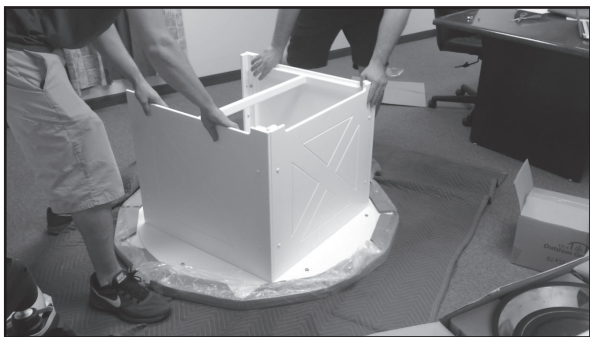

### Step 3

Using two people, place the base upsidedown onto the table top, lining up the four holes. (Base will sit flush with the top)



### Step 4

Use the four bolts provided to attach the base to the top. First, loosely put in all four bolts, then hand tighten. Finish by doing a 1/2 rotation using your 7/16" wrench. DO NOT USE POWER TOOLS AND DO NOT OVERTIGHTEN.



### Step 5

Not that the base is securely fastened to the top, use two people and rotate the entire fire pit back up right.



### Step 6

Using the handles, pull the magnetic side door open and set aside. Place the fire bowl into the top.



### Step 7

Find the inside of the control panel and remove the two red caps protecting the nozzles. (Note: In-order to show the inner control panel our images do not have the table top mounted)



### Step 8

On the bowl you'll see a flexible metal hose coming out. Attach the other end to the top nozzle of the control panel.



### Step 9

Take the black rubber hose and attach it to bottom nozzle of the control panel.



### Step 10

Add your propane tank to the dolly and make sure the gas is turned off. Take the black rubber hose and attach it to the propane tank. Use a wrench to go back through and tighten all four connections.




#### Step 11

Hanging from the fire bowl you'll find two black wires. Attach both of them to the black box on the control panel. (Note: there is no polarity issue, either wire can be connected to either plug)



#### Step 12

Replace the magnetic door and spread all of the glass stones evenly in the bowl over the burner area being careful to not hit or bend the ignitor. Keep glass clear of the spark to avoid blockage.

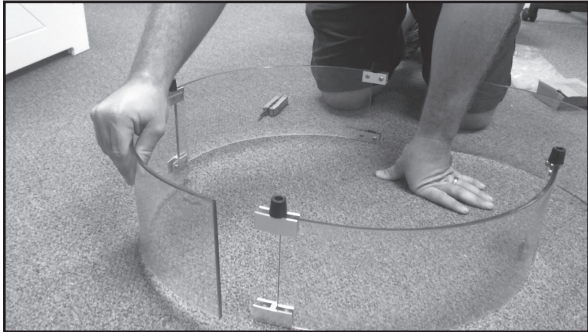

#### Step 13

If you purchased a glass wind guard, assemble that (directions on page 4) and put into place.



#### Step 14

Go to the front of your control panel. Unscrew the ignitor knob counter-clockwise and insert a AAA battery (positive facing out). Replace the ignitor button.



#### Step 13

Your fire pit is complete!

Ignitor



#### To Start

Open the magnetic fire pit door and turn the propane tank on and replace the door. On the front control, turn the knob from "OFF" to "ON" and press the ignitor button.

#### NOTES:

- Do not burn your fire without the glass stones!
- Glass stones may split during/after use, this is normal due to the physical properties of glass.
- Cleaning: Use glass cleaner on the glass wind guard. For the MGP table top and base clean everyday dirt and stains with a soft sponge and mixture of mild detergent and water. Be weary of nylon scrubbies or stiff nylon brushes as excess force can mar the finish. Stains and marks have been successfully removed with the following branded products: Goof Off®, Mr. Clean Magic Eraser®, GOJO Orange Pumice Hand Cleaner and Simple Green.

#### Test Your Gas Lines

We recommend testing your gas lines before using to test for leaks. This can be done using the "Soapy Water Method"

1. Apply a soap-and-water solution to each connection in the gas lines and down the rubber hose.
2. Turn on the gas and look for bubbles.
3. If bubbles form, tighten the fitting slightly with a pipe wrench and recheck.
4. Be sure to wipe off the old solution and apply a new round of the soapy mixture.
5. If you see bubbles coming from the rubber hose line (not the fitting) turn the gas off and call for a replacement rubber hose.





## MGP FIRE PIT: Glass Wind Guard (Sold Separately)

### **You will need:**


Flat, Clean Table  
Phillips Screwdriver



Use your QR Code reader  
to watch a video or visit  
[www.youtube.com/windwarddesign](http://www.youtube.com/windwarddesign)


### **Wind Guard Kit Includes:**

	Qty.	Description	Picture
<b>I</b>	4	Glass Panes	
<b>J</b>	4	Bottom Connectors	
<b>K</b>	4	Top Connectors	

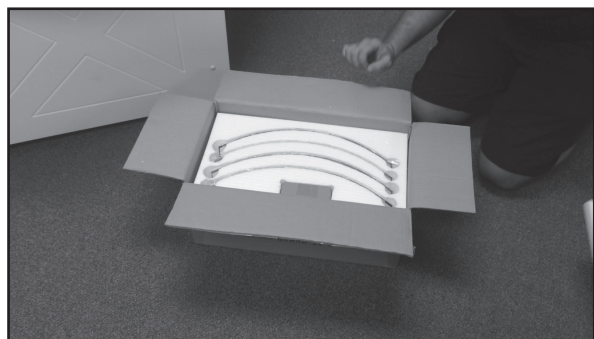


### **Step 1**

Open the wind guard kit and check to make sure you have everything.

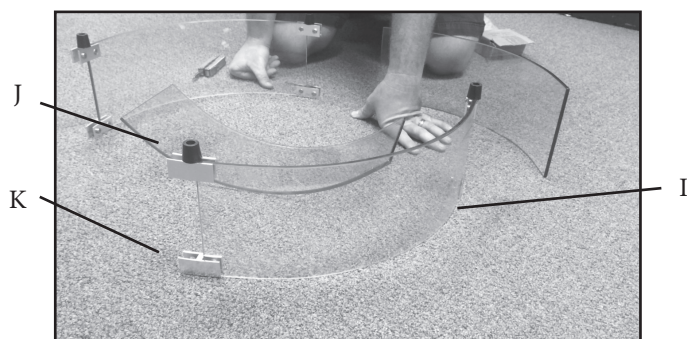

### **Step 2**

On a flat surface, use a phillips screwdriver to put all four connectors onto one glass pane. As picture above, do it upside down with the bottom connectors on top, and the top connectors flush to the ground with the glass. Repeat with a second glass pane.

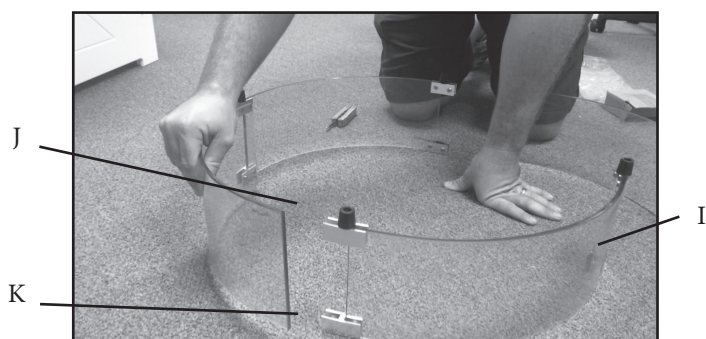

### **Step 3**

Set the two complete glass panes across from each other. Slide a third pane in-between the two and screw into place. Add the fourth pane to complete the circle and screw into place.



### **Step 4**

Using two people, carefully flip the entire glass pane over (you may require the help of a second person) and then place onto your fire pit.