

HOW TO REPLACE AKZ TILT LEVER HANDLE

Required items: Hammer, puncher

Note: Read these instructions completely before attempting replacement. This replacement may be completed with the cantilever removed from the base or standing.



STEP 1 Disengage Tilt Lever

Make sure umbrella is in closed position. Disengage tilt lever from main frame (Fig. 1).





STEP 2 Remove Broken Tilt Lever Handle

Place puncher over one of the pins located on the tilt lever (Fig. 2) and lightly hammer down until pin is slightly below the metal surface (Fig. 3). Repeat process for second pin. **Note: Do not hammer more than necessary; May damage tilt lever!** Once both pins are slightly below tilt lever, remove broken tilt lever handle and set pins aside (Fig. 4).

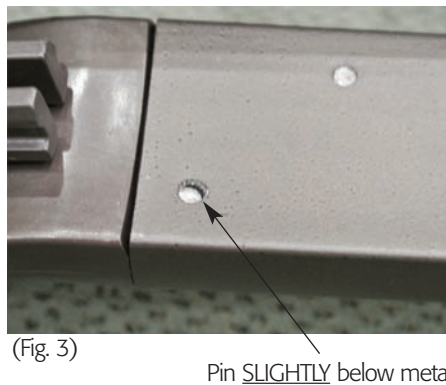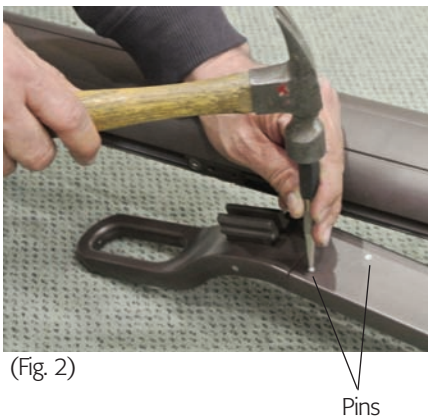

STEP 3 Replace Tilt Lever Handle

Slide new tilt lever handle into tilt lever (Fig. 5). Insert pins into the tilt lever holes with the smooth side down (Fig. 6). Carefully hammer pins into place (Fig. 7). Stop hammering once pins are flush with the tilt lever. **Note: Do not hammer more than necessary; May damage tilt lever!** Your new AKZ tilt lever handle is now ready for use. Test to ensure proper function.

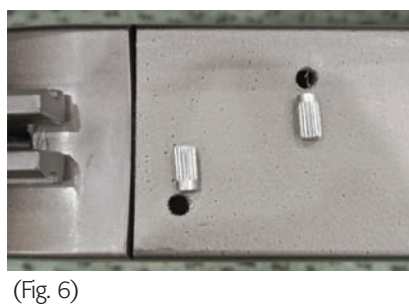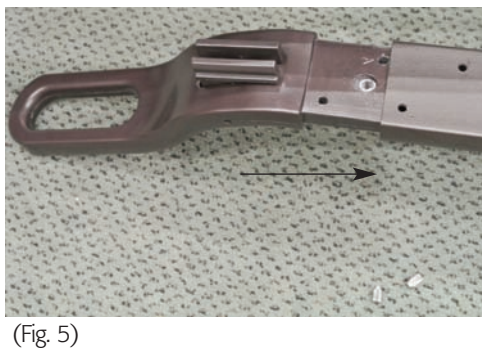

www.treasuregarden.com

©2014 Treasure Garden, Inc. - All Rights Reserved.

Initial 4/14