Gasket surface finishes

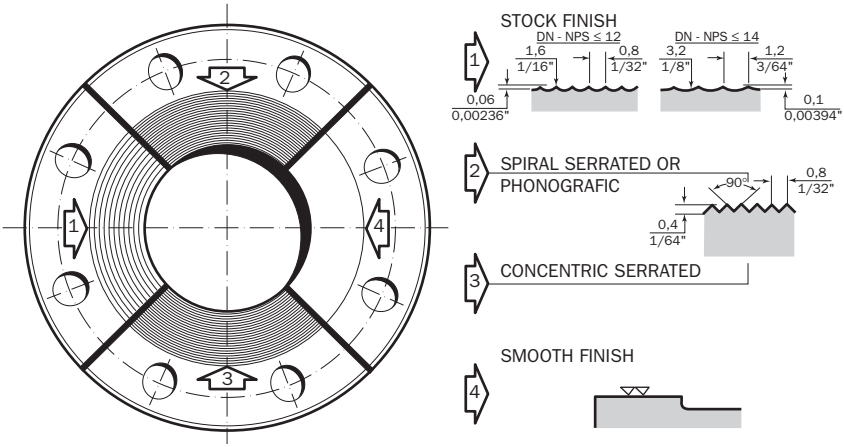

Gaket Surface finishes

Flanges, Orifice flanges, Long Welding Necks, and other fittings designed for bolted connection, when supplied with raised or flat face, may have any type of gasket surface finish required.

Gasket surface, unless otherwise specified by the purchaser, will be machined with a Stock Finish.

This surface, together with other gasket surface finishes which can be furnished to order, is described as follows:

1) Stock Finish: The most widely used of any gasket finish, because, practically, is suitable for all ordinary service conditions. This is a continuous spiral groove. Flanges sizes 12" and smaller, are produced with a 1/16" round-nosed tool at a feed of 1/32" per revolution. Forsized 14" and larger, the finish is made with a 1/8" round-nosed tool at a feed of 3/64" per revolution.

2) Spiral serrated or phonographic: This finish is produced by using a 90° included-angle «V» tool, making a spiral groove 1/64" deep with a feed of 1/32".

3) Concentric serrated: This finish is produced by using a 90° included-angle «V» tool, making concentric groove 1/64" deep and 1/32" apart.

4) Smooth finish: This finish is produced by several shapes of tools cutting at speeds and feeds which leave no definite toolmarks apparent to the naked eye.