PRODUCT SPECIFICATIONS

SHARP®

Integrated Circuits Group

LRS1828

Stacked Chip

128M (x16) Boot Block Flash and 32M (x16) SCRAM

(Model No.: LRS1828)

Spec No.: EL149020

Issue Date: September 24, 2002

SHARP

SPEC No.	E L 1 4 9 0 2 0
ISSUE:	Sep. 24. 2002

To;

SPECIFICATIONS

Product Type: 64M (x16) Flash Memory +64M (x16) Flash Memory +32M (x16) Smartcombo RAM

LRS1828

Model No. (LRS1828)

*This specifications contains 63 pages including the cover and appendix.
*Refer to LH28F320BF, LH28F640BF, LH28F128BF Series Appendix (FUM00701).

CUSTOMERS ACCEPTANCE

DATE:

BY:

PRESENTED

BY: M. Okada

M. OKADA
Dept. General Manager

REVIEWED BY: M. Kawata

PREPARED BY: Y. Sako

Product Development Dept. III
Flash Memory Division
Integrated Circuits Group
SHARP CORPORATION

- Handle this document carefully for it contains material protected by international copyright law. Any reproduction, full or in part, of this material is prohibited without the express written permission of the company.
- When using the products covered herein, please observe the conditions written herein and the precautions outlined in the following paragraphs. In no event shall the company be liable for any damages resulting from failure to strictly adhere to these conditions and precautions.

(1) The products covered herein are designed and manufactured for the following application areas. When using the products covered herein for the equipment listed in Paragraph (2), even for the following application areas, be sure to observe the precautions given in Paragraph (2). Never use the products for the equipment listed in Paragraph (3).

- Office electronics
- Instrumentation and measuring equipment
- Machine tools
- Audiovisual equipment
- Home appliance
- Communication equipment other than for trunk lines

(2) Those contemplating using the products covered herein for the following equipment which demands high reliability, should first contact a sales representative of the company and then accept responsibility for incorporating into the design fail-safe operation, redundancy, and other appropriate measures for ensuring reliability and safety of the equipment and the overall system.

- Control and safety devices for airplanes, trains, automobiles, and other transportation equipment
- Mainframe computers
- Traffic control systems
- Gas leak detectors and automatic cutoff devices
- Rescue and security equipment
- Other safety devices and safety equipment, etc.

(3) Do not use the products covered herein for the following equipment which demands extremely high performance in terms of functionality, reliability, or accuracy.

- Aerospace equipment
- Communications equipment for trunk lines
- Control equipment for the nuclear power industry
- Medical equipment related to life support, etc.

(4) Please direct all queries and comments regarding the interpretation of the above three Paragraphs to a sales representative of the company.

- Please direct all queries regarding the products covered herein to a sales representative of the company.

Contents

1. Description

The LRS1828 is a combination memory organized as 4,194,304 x16 bit flash memory, 4,194,304 x16 bit flash memory and 2,097,152 x16 bit Smartcombo RAM in one package.

Features

- Power supply • • • • 2.7V to 3.3V(Flash)
  • • • • 2.7V to 3.1V(Smartcombo RAM)
- Operating temperature • • • • -30°C to +85°C
- Not designed or rated as radiation hardened
- 72pin CSP (LCSP072-P-0811) plastic package
- Flash memory has P-type bulk silicon, and Smartcombo RAM has P-type bulk silicon

Flash Memory

- F_1 : 64M (x16) bit Flash Memory, F_2 : 64M (x16) bit Flash Memory
- Access Time • • • • 65 ns (Max.)
- Power supply current for each Chip (The current for F-V_{CC} pin and F-V_{PP} pin)
  - Read • • • • 26 mA (Max. t_{CYCLE} = 200ns, CMOS Input)
  - Word write • • • • 61 mA (Max.)
  - Block erase • • • • 31 mA (Max.)
  - Reset Power-Down • • • • 50 µA (Max. F-$\overline{RST}$ = GND ± 0.2V, I_{OUT} (F-RY/$\overline{BY}$) = 0mA)
  - Standby • • • • 50 µA (Max. F-$\overline{CE}$ = F-$\overline{RST}$ = F-V_{CC} ± 0.2V)
- Optimized Array Blocking Architecture for each Chip
  - Eight 4K-word Parameter Blocks
  - One-hundred and twenty-seven 32K-word Main Blocks
  - F_1 : Bottom Parameter Location, F_2 : Top Parameter Location
- Extended Cycling Capability
  - 100,000 Block Erase Cycles (F-V_{PP} = 1.65V to 3.3V)
- Enhanced Automated Suspend Options
  - Word Write Suspend to Read
  - Block Erase Suspend to Word Write
  - Block Erase Suspend to Read

* In the following pages, F_1, F_2 and F are defined as F_1: 64M (x16) bit Flash, F_2: 64M (x16) bit Flash, F: both Flashes in common.

Smartcombo RAM

- Access Time • • • • 65 ns (Max.)
- Cycle time • • • • 65 ns (Min.)
- Power Supply current
  - Operating current • • • • 50 mA (Max. t_{RC}, t_{WC} = Min.)
  - Standby current (Data retention current) • • • • 100 µA (Max.)
  - Sleep Mode (Data non-retention current) • • • • 30 µA (Max.)

2. Pin Configuration

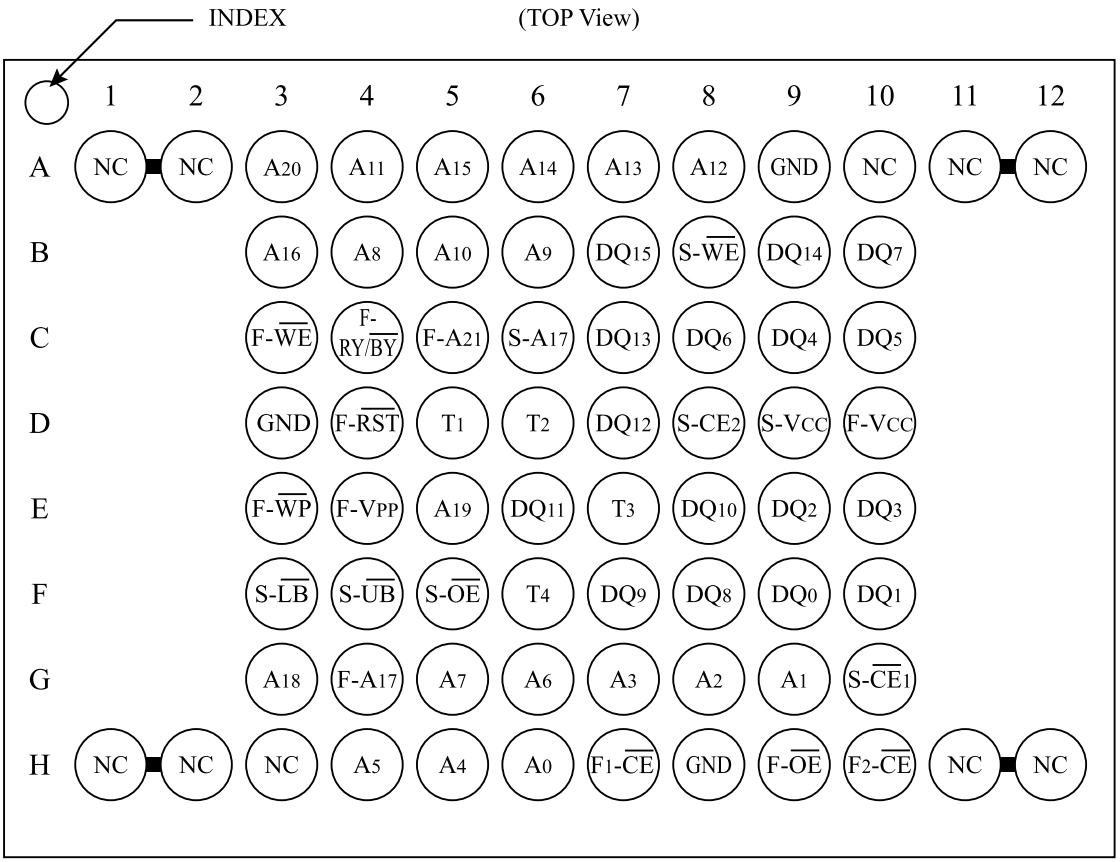

Note) From T1 to T4 pins are needed to be open.
Two NC pins at the corner are connected.
Do not float any GND pins.

Pin	Description	Type
A_0 to A_{16}, A_{18} to A_{20}	Address Inputs (Common)	Input
F-A_{17}, F-A_{21}	Address Inputs (Flash)	Input
S-A_{17}	Address Input (Smartcombo RAM)	Input
$F_{1,2}$-$\overline{CE}$	Chip Enable Input (Flash)	Input
S-$\overline{CE}_1$	Chip Enable Input (Smartcombo RAM)	Input
S-CE_2	Sleep State Input (Smartcombo RAM) * See Chapter B-1	Input
F-$\overline{WE}$	Write Enable Input (Flash)	Input
S-$\overline{WE}$	Write Enable Input (Smartcombo RAM)	Input
F-$\overline{OE}$	Output Enable Input (Flash)	Input
S-$\overline{OE}$	Output Enable Input (Smartcombo RAM)	Input
S-$\overline{LB}$	Smartcombo RAM Byte Enable Input (DQ_0 to DQ_7)	Input
S-$\overline{UB}$	Smartcombo RAM Byte Enable Input (DQ_8 to DQ_{15})	Input
F-$\overline{RST}$	Reset Power Down Input (Flash) Block erase and Write : V_{IH} Read : V_{IH} Reset Power Down : V_{IL}	Input
F-$\overline{WP}$	Write Protect Input (Flash) When F-$\overline{WP}$ is V_{IL}, locked-down blocks cannot be unlocked. Erase or program operation can be executed to the blocks which are not locked and locked-down. When F-$\overline{WP}$ is V_{IH}, lock-down is disabled.	Input
F-RY/$\overline{BY}$	Ready/Busy Output (Flash) During an Erase or Write operation : V_{OL} Block Erase and Write Suspend : High-Z (High impedance)	Open Drain Output
DQ_0 to DQ_{15}	Data Inputs and Outputs (Common)	Input / Output
F-V_{CC}	Power Supply (Flash)	Power
S-V_{CC}	Power Supply (Smartcombo RAM)	Power
F-V_{PP}	Monitoring Power Supply Voltage (Flash) Block Erase and Write : F-V_{PP} = V_{PPH} All Blocks Locked : F-V_{PP} < V_{PPLK}	Input
GND	GND (Common)	Power
NC	Non Connection	-
T_1 to T_4	Test pins (Should be all open)	-

3. Truth Table

3.1 Bus Operation(1)

Flash	Smart combo RAM	Notes	F-$\overline{CE}$(7)	F-$\overline{RST}$	F-$\overline{OE}$	F-$\overline{WE}$	S-$\overline{CE_1}$	S-CE_2	S-$\overline{OE}$	S-$\overline{WE}$	S-$\overline{LB}$	S-$\overline{UB}$	DQ_0 to DQ_{15}
Read	Standby	3,5,8	L	H	L	H	H	H	X	X	X		(9)
Output Disable		5,8			H								High - Z
Write		2,3,4,5,8				L	X	H			H	H	D_{IN}
Read	Sleep	3,5,8	L	H	L	H	X	L	X	X	X		(9)
Output Disable		5,8			H								High - Z
Write		2,3,4,5,8				L							D_{IN}
Standby	Read	5,6	H	H	X	X	L	H	L	H	(10)		
	Output Disable	5,6							H	H	X	X	High - Z
	Write	5,6							H	L	(10)		
Reset Power Down	Read	5,6	X	L	X	X	L	H	L	H	(10)		
	Output Disable	5,6							H	H	X	X	High - Z
	Write	5,6							H	L	(10)		
Standby	Standby	5	H	H	X	X	H	H	X	X	X		High - Z
Reset Power Down		5,6	X	L			X				H	H	
Standby	Sleep	5	H	H	X	X	X	L	X	X	X		High - Z
Reset Power Down		5,6	X	L									

Notes:

1. L = V_{IL}, H = V_{IH}, X = H or L, High-Z = High impedance. Refer to the DC Characteristics.
2. Command writes involving block erase (page buffer) program are reliably executed when F-V_{PP} = V_{PPH} and F-V_{CC} = 2.7V to 3.3V.
   Command writes involving full chip erase is reliably executed when F-V_{PP} = V_{PPH} and F-V_{CC} = 2.7V to 3.3V.
   Block erase, full chip erase, (page buffer) program with F-V_{PP} < V_{PPH} (Min.) produce spurious results and should not be attempted.
3. Never hold F-$\overline{OE}$ low and F-$\overline{WE}$ low at the same timing.
4. Refer to Section 5. Command Definitions for Flash Memory valid D_{IN} during a write operation.
5. F-$\overline{WP}$ set to V_{IL} or V_{IH}.
6. Electricity consumption of Flash Memory is lowest when F-$\overline{RST}$ = GND ±0.2V.
7. Never hold F_1-$\overline{CE}$ low and F_2-$\overline{CE}$ low at the same timing.
8. Read Bus operation or Write Bus operation is not simultaneously operated to F_1 and F_2.

9. Flash Read Mode

Mode	Address	DQ_0 to DQ_{15}
Read Array	X	D_{OUT}
Read Identifier Codes	See 5.2	See 5.2
Read Query	Refer to the Appendix	Refer to the Appendix

10. S-$\overline{UB}$, S-$\overline{LB}$ Control Mode

S-$\overline{LB}$	S-$\overline{UB}$	DQ_0 to DQ_7	DQ_8 to DQ_{15}
L	L	D_{OUT}/D_{IN}	D_{OUT}/D_{IN}
L	H	D_{OUT}/D_{IN}	High - Z
H	L	High - Z	D_{OUT}/D_{IN}

3.2 Simultaneous Operation Modes Allowed with Four Planes[1, 2, 3]

IF ONE PARTITION IS:	THEN THE MODES ALLOWED IN THE OTHER PARTITION IS:									
	Read Array	Read ID	Read Status	Read Query	Word Program	Page Buffer Program	Block Erase	Full Chip Erase	Program Suspend	Block Erase Suspend
Read Array	X	X	X	X	X	X	X		X	X
Read ID	X	X	X	X	X	X	X		X	X
Read Status	X	X	X	X	X	X	X	X	X	X
Read Query	X	X	X	X	X	X	X		X	X
Word Program	X	X	X	X						X
Page Buffer Program	X	X	X	X						X
Block Erase	X	X	X	X						
Full Chip Erase			X							
Program Suspend	X	X	X	X						X
Block Erase Suspend	X	X	X	X	X	X			X	

Notes:

1. “X” denotes the operation available.
2. Configurative Partition Dual Work Restrictions:
   Status register reflects partition state, not WSM (Write State Machine) state - this allows a status register for each partition.
   Only one partition can be erased or programmed at a time - no command queuing.
   Commands must be written to an address within the block targeted by that command.
3. This table shows operation which can be performed by only the selected chip, not during 2 chips of F_1 and F_2.

4. Block Diagram

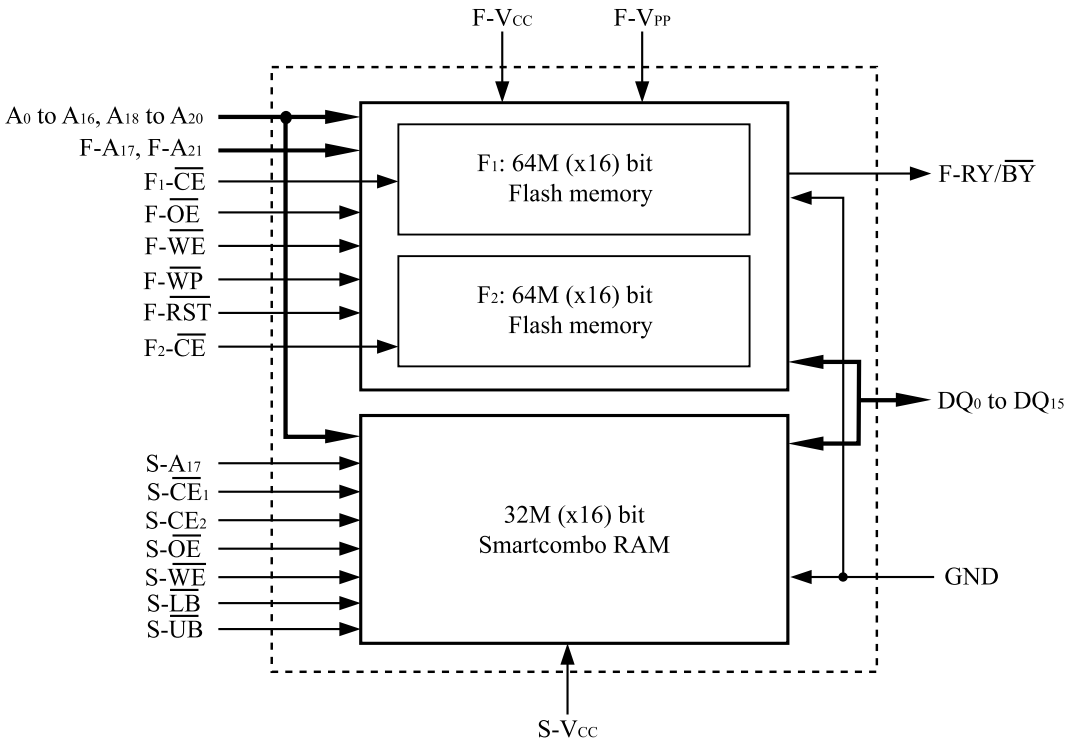

5. Command Definitions for Flash Memory(11)

5.1 Command Definitions

Command	Bus Cycles Req'd	Notes	First Bus Cycle			Second Bus Cycle		
			Oper(1)	Address(2)	Data(3)	Oper(1)	Address(2)	Data(3)
Read Array	1	2	Write	PA	FFH			
Read Identifier Codes	≥ 2	2,3,4	Write	PA	90H	Read	IA	ID
Read Query	≥ 2	2,3,4	Write	PA	98H	Read	QA	QD
Read Status Register	2	2,3	Write	PA	70H	Read	PA	SRD
Clear Status Register	1	2	Write	PA	50H			
Block Erase	2	2,3,5	Write	BA	20H	Write	BA	D0H
Full Chip Erase	2	2,5,9	Write	X	30H	Write	X	D0H
Program	2	2,3,5,6	Write	WA	40H or 10H	Write	WA	WD
Page Buffer Program	≥ 4	2,3,5,7	Write	WA	E8H	Write	WA	N-1
Block Erase and (Page Buffer) Program Suspend	1	2,8,9	Write	PA	B0H			
Block Erase and (Page Buffer) Program Resume	1	2,8,9	Write	PA	D0H			
Set Block Lock Bit	2	2	Write	BA	60H	Write	BA	01H
Clear Block Lock Bit	2	2,10	Write	BA	60H	Write	BA	D0H
Set Block Lock-down Bit	2	2	Write	BA	60H	Write	BA	2FH
Set Partition Configuration Register	2	2,3	Write	PCRC	60H	Write	PCRC	04H

Notes:

1. Bus operations are defined in 3.1 Bus Operation.
2. The address which is written at the first bus cycle should be the same as the address which is written at the second bus cycle.
   X=Any valid address within the device.
   PA=Address within the selected partition.
   IA=Identifier codes address (See 5.2 Identifier Codes for Read Operation).
   QA=Query codes address. Refer to the LH28F320BF, LH28F640BF, LH28F128BF series Appendix for details.
   BA=Address within the block being erased, set/cleared block lock bit or set block lock-down bit.
   WA=Address of memory location for the Program command or the first address for the Page Buffer Program command.
   PCRC=Partition configuration register code presented on the address A_0-A_{15}.
3. ID=Data read from identifier codes (See 5.2 Identifier Codes for Read Operation).
   QD=Data read from query database. Refer to the LH28F320BF, LH28F640BF, LH28F128BF series Appendix for details.
   SRD=Data read from status register. See 6. Status Register Definition for a description of the status register bits.
   WD=Data to be programmed at location WA. Data is latched on the rising edge of F-$\overline{WE}$ or F-$\overline{CE}$ (whichever goes high first).
   N-1=N is the number of the words to be loaded into a page buffer.
4. Following the Read Identifier Codes command, read operations access manufacturer code, device code, block lock configuration code, partition configuration register code (See 5.2 Identifier Codes for Read Operation).
   The Read Query command is available for reading CFI (Common Flash Interface) information.
5. Block erase, full chip erase or (page buffer) program cannot be executed when the selected block is locked. Unlocked block can be erased or programmed when F-$\overline{RST}$ is V_{IH}.
6. Either 40H or 10H are recognized by the CUI (Command User Interface) as the program setup.
7. Following the third bus cycle, inputs the program sequential address and write data of "N" times. Finally, input the any valid address within the target partition to be programmed and the confirm command (D0H). Refer to the LH28F320BF, LH28F640BF, LH28F128BF series Appendix for details.

8. If the program operation in one partition is suspended and the erase operation in other partition is also suspended, the suspended program operation should be resumed first, and then the suspended erase operation should be resumed next.
9. Full chip erase operation can not be suspended.
10. Following the Clear Block Lock Bit command, block which is not locked-down is unlocked when F-$\overline{WP}$ is V_{IL}.
    When F-$\overline{WP}$ is V_{IH}, lock-down bit is disabled and the selected block is unlocked regardless of lock-down configuration.
11. Commands other than those shown above are reserved by SHARP for future device implementations and should not be used.

5.2 Identifier Codes for Read Operation

	Code	Address $[A_{15}\text{-}A_0]^{(4)}$	Data $[DQ_{15}\text{-}DQ_0]$	Notes
Manufacturer Code	Manufacturer Code	0000H	00B0H	
Device Code	64M Bottom Parameter Device Code (F_1 Selected) 64M Top Parameter Device Code (F_2 Selected)	0001H	00B1H (F_1 Selected) 00B0H (F_2 Selected)	1
Block Lock Configuration Code	Block is Unlocked	Block Address + 2	$DQ_0 = 0$	2
	Block is Locked		$DQ_0 = 1$	2
	Block is not Locked-Down		$DQ_1 = 0$	2
	Block is Locked-Down		$DQ_1 = 1$	2
Device Configuration Code	Partition Configuration Register	0006H	PCRC	3

Notes:

1. Bottom parameter device has its parameter blocks in the plane 0 (The lowest address).
   Top parameter device has its parameter blocks in the plane 3 (The highest address).
2. $DQ_{15}\text{-}DQ_2$ is reserved for future implementation.
3. PCRC=Partition Configuration Register Code.
4. The address $A_{21}\text{-}A_{16}$ are shown in below table for reading the manufacturer, device, lock configuration, device configuration code.
   The address to read the identifier codes is dependent on the partition which is selected when writing the Read Identifier Codes command (90H).
   See Chapter 6. Partition Configuration Register Definition (P.15) for the partition configuration register.

Identifier Codes for Read Operation on Partition Configuration (64M-bit device)

Partition Configuration Register			Address (64M-bit device) $[A_{21}\text{-}A_{16}]$
PCR.10	PCR.9	PCR.8	
0	0	0	00H
0	0	1	00H or 10H
0	1	0	00H or 20H
1	0	0	00H or 30H
0	1	1	00H or 10H or 20H
1	1	0	00H or 20H or 30H
1	0	1	00H or 10H or 30H
1	1	1	00H or 10H or 20H or 30H

5.3 Functions of Block Lock and Block Lock-Down

Current State					Erase/Program Allowed [2]
State	F-$\overline{WP}$	DQ_1 [1]	DQ_0 [1]	State Name	
[000]	0	0	0	Unlocked	Yes
[001] [3]	0	0	1	Locked	No
[011]	0	1	1	Locked-down	No
[100]	1	0	0	Unlocked	Yes
[101] [3]	1	0	1	Locked	No
[110] [4]	1	1	0	Lock-down Disable	Yes
[111]	1	1	1	Lock-down Disable	No

Notes:

1. DQ_0 = 1: a block is locked; DQ_0 = 0: a block is unlocked.
   DQ_1 = 1: a block is locked-down; DQ_1 = 0: a block is not locked-down.
2. Erase and program are general terms, respectively, to express: block erase, full chip erase and (page buffer) program operations.
3. At power-up or device reset, all blocks default to locked state and are not locked-down, that is, [001] (F-$\overline{WP}$ = 0) or [101] (F-$\overline{WP}$ = 1), regardless of the states before power-off or reset operation.
4. When F-$\overline{WP}$ is driven to V_{IL} in [110] state, the state changes to [011] and the blocks are automatically locked.

5.4 Block Locking State Transitions upon Command Write [4]

Current State				Result after Lock Command Written (Next State)		
State	F-$\overline{WP}$	DQ_1	DQ_0	Set Lock [1]	Clear Lock [1]	Set Lock-down [1]
[000]	0	0	0	[001]	No Change	[011] [2]
[001]	0	0	1	No Change [3]	[000]	[011]
[011]	0	1	1	No Change	No Change	No Change
[100]	1	0	0	[101]	No Change	[111] [2]
[101]	1	0	1	No Change	[100]	[111]
[110]	1	1	0	[111]	No Change	[111] [2]
[111]	1	1	1	No Change	[110]	No Change

Notes:

1. “Set Lock” means Set Block Lock Bit command, “Clear Lock” means Clear Block Lock Bit command and “Set Lock-down” means Set Block Lock-Down Bit command.
2. When the Set Block Lock-Down Bit command is written to the unlocked block (DQ_0 = 0), the corresponding block is locked-down and automatically locked at the same time.
3. “No Change” means that the state remains unchanged after the command written.
4. In this state transitions table, assumes that F-$\overline{WP}$ is not changed and fixed V_{IL} or V_{IH}.

5.5 Block Locking State Transitions upon F-$\overline{WP}$ Transition(4)

Previous State	Current State				Result after F-$\overline{WP}$ Transition (Next State)	
	State	F-$\overline{WP}$	DQ_1	DQ_0	F-$\overline{WP}$ = 0→1(1)	F-$\overline{WP}$ = 1→0(1)
-	[000]	0	0	0	[100]	-
-	[001]	0	0	1	[101]	-
[110](2)	[011]	0	1	1	[110]	-
Other than [110](2)					[111]	-
-	[100]	1	0	0	-	[000]
-	[101]	1	0	1	-	[001]
-	[110]	1	1	0	-	[011](3)
-	[111]	1	1	1	-	[011]

Notes:

1. "F-$\overline{WP}$ = 0→1" means that F-$\overline{WP}$ is driven to V_{IH} and "F-$\overline{WP}$ = 1→0" means that F-$\overline{WP}$ is driven to V_{IL}.
2. State transition from the current state [011] to the next state depends on the previous state.
3. When F-$\overline{WP}$ is driven to V_{IL} in [110] state, the state changes to [011] and the blocks are automatically locked.
4. In this state transitions table, assumes that lock configuration commands are not written in previous, current and next state.

6. Status Register Definition

Status Register Definition

R	R	R	R	R	R	R	R
15	14	13	12	11	10	9	8
WSMS	BESS	BEFCES	PBPS	VPPS	PBPSS	DPS	R
7	6	5	4	3	2	1	0

SR.15 - SR.8 = RESERVED FOR FUTURE ENHANCEMENTS (R)	Notes:
SR.7 = WRITE STATE MACHINE STATUS (WSMS) 1 = Ready 0 = Busy	Status Register indicates the status of the partition, not WSM (Write State Machine). Even if the SR.7 is "1", the WSM may be occupied by the other partition when the device is set to 2, 3 or 4 partitions configuration.
SR.6 = BLOCK ERASE SUSPEND STATUS (BESS) 1 = Block Erase Suspended 0 = Block Erase in Progress/Completed	Check SR.7 or F-RY/$\overline{BY}$ to determine block erase, full chip erase, (page buffer) program completion. SR.6 - SR.1 are invalid while SR.7= "0".
SR.5 = BLOCK ERASE AND FULL CHIP ERASE STATUS (BEFCES) 1 = Error in Block Erase or Full Chip Erase 0 = Successful Block Erase or Full Chip Erase	If both SR.5 and SR.4 are "1"s after a block erase, full chip erase, page buffer program, set/clear block lock bit, set block lock-down bit or set partition configuration register attempt, an improper command sequence was entered.
SR.4 = (PAGE BUFFER) PROGRAM STATUS (PBPS) 1 = Error in (Page Buffer) Program 0 = Successful (Page Buffer) Program	
SR.3 = F-V_{PP} STATUS (VPPS) 1 = F-V_{PP} LOW Detect, Operation Abort 0 = F-V_{PP} OK	SR.3 does not provide a continuous indication of F-V_{PP} level. The WSM interrogates and indicates the F-V_{PP} level only after Block Erase, Full Chip Erase, (Page Buffer) Program command sequences. SR.3 is not guaranteed to report accurate feedback when F-$V_{PP} \neq V_{PPH}$ or V_{PPLK}.
SR.2 = (PAGE BUFFER) PROGRAM SUSPEND STATUS (PBPSS) 1 = (Page Buffer) Program Suspended 0 = (Page Buffer) Program in Progress/Completed	
SR.1 = DEVICE PROTECT STATUS (DPS) 1 = Erase or Program Attempted on a Locked Block, Operation Abort 0 = Unlocked	SR.1 does not provide a continuous indication of block lock bit. The WSM interrogates the block lock bit only after Block Erase, Full Chip Erase, (Page Buffer) Program command sequences. It informs the system, depending on the attempted operation, if the block lock bit is set. Reading the block lock configuration codes after writing the Read Identifier Codes command indicates block lock bit status.
SR.0 = RESERVED FOR FUTURE ENHANCEMENTS (R)	SR.15 - SR.8 and SR.0 are reserved for future use and should be masked out when polling the status register.

Extended Status Register Definition

R	R	R	R	R	R	R	R
15	14	13	12	11	10	9	8
SMS	R	R	R	R	R	R	R
7	6	5	4	3	2	1	0

XSR.15-8 = RESERVED FOR FUTURE ENHANCEMENTS (R) XSR.7 = STATE MACHINE STATUS (SMS) 1 = Page Buffer Program available 0 = Page Buffer Program not available XSR.6-0 = RESERVED FOR FUTURE ENHANCEMENTS (R)	Notes: After issue a Page Buffer Program command (E8H), XSR.7="1" indicates that the entered command is accepted. If XSR.7 is "0", the command is not accepted and a next Page Buffer Program command (E8H) should be issued again to check if page buffer is available or not. XSR.15-8 and XSR.6-0 are reserved for future use and should be masked out when polling the extended status register.

Partition Configuration Register Definition

R	R	R	R	R	PC2	PC1	PC0
15	14	13	12	11	10	9	8
R	R	R	R	R	R	R	R
7	6	5	4	3	2	1	0

PCR.15-11 = RESERVED FOR FUTURE ENHANCEMENTS (R)

PCR.10-8 = PARTITION CONFIGURATION (PC2-0)

000 = No partitioning. Dual Work is not allowed.

001 = Plane1-3 are merged into one partition. (default in a bottom parameter device)

010 = Plane 0-1 and Plane2-3 are merged into one partition respectively.

100 = Plane 0-2 are merged into one partition. (default in a top parameter device)

011 = Plane 2-3 are merged into one partition. There are three partitions in this configuration. Dual work operation is available between any two partitions.

110 = Plane 0-1 are merged into one partition. There are three partitions in this configuration. Dual work operation is available between any two partitions.

101 = Plane 1-2 are merged into one partition. There are three partitions in this configuration. Dual work operation is available between any two partitions.

111 = There are four partitions in this configuration. Each plane corresponds to each partition respectively. Dual work operation is available between any two partitions.

PCR.7-0 = RESERVED FOR FUTURE ENHANCEMENTS (R)

Notes:

After power-up or device reset, PCR10-8 (PC2-0) is set to "001" in a bottom parameter device and "100" in a top parameter device.

See the table below for more details.

PCR.15-11 and PCR.7-0 are reserved for future use and should be masked out when polling the partition configuration register.

Partition Configuration

PC2 PC1 PC0	PARTITIONING FOR DUAL WORK	PC2 PC1 PC0	PARTITIONING FOR DUAL WORK
0 0 0	PARTITION0: PLANE3, PLANE2, PLANE1, PLANE0	0 1 1	PARTITION2: PLANE3, PLANE2; PARTITION1: PLANE1; PARTITION0: PLANE0
0 0 1	PARTITION1: PLANE3, PLANE2, PLANE1; PARTITION0: PLANE0	1 1 0	PARTITION2: PLANE3; PARTITION1: PLANE2; PARTITION0: PLANE1, PLANE0
0 1 0	PARTITION1: PLANE3, PLANE2; PARTITION0: PLANE1, PLANE0	1 0 1	PARTITION2: PLANE3; PARTITION1: PLANE2, PLANE1; PARTITION0: PLANE0
1 0 0	PARTITION1: PLANE3; PARTITION0: PLANE2, PLANE1, PLANE0	1 1 1	PARTITION3: PLANE3; PARTITION2: PLANE2; PARTITION1: PLANE1; PARTITION0: PLANE0

7. Memory Map for Flash Memory

7.1 Memory Map - F_1 Selected (F_1-$\overline{CE}$ = "V_{IL}", F_2-$\overline{CE}$ = "V_{IH}")

Bottom Parameter

	BLOCK NUMBER		ADDRESS RANGE
PLANE3 (UNIFORM PLANE)	134	32K-WORD	3F8000H - 3FFFFH
	133	32K-WORD	3F0000H - 3F7FFFH
	132	32K-WORD	3E8000H - 3EFFFFH
	131	32K-WORD	3E0000H - 3E7FFFH
	130	32K-WORD	3D8000H - 3DFFFFH
	129	32K-WORD	3D0000H - 3D7FFFH
	128	32K-WORD	3C8000H - 3CFFFFH
	127	32K-WORD	3C0000H - 3C7FFFH
	126	32K-WORD	3B8000H - 3BFFFFH
	125	32K-WORD	3B0000H - 3B7FFFH
	124	32K-WORD	3A8000H - 3AFFFFH
	123	32K-WORD	3A0000H - 3A7FFFH
	122	32K-WORD	398000H - 39FFFFH
	121	32K-WORD	390000H - 397FFFH
	120	32K-WORD	388000H - 38FFFFH
	119	32K-WORD	380000H - 387FFFH
	118	32K-WORD	378000H - 37FFFFH
	117	32K-WORD	370000H - 377FFFH
	116	32K-WORD	368000H - 36FFFFH
	115	32K-WORD	360000H - 367FFFH
	114	32K-WORD	358000H - 35FFFFH
	113	32K-WORD	350000H - 357FFFH
	112	32K-WORD	348000H - 34FFFFH
	111	32K-WORD	340000H - 347FFFH
	110	32K-WORD	338000H - 33FFFFH
	109	32K-WORD	330000H - 337FFFH
	108	32K-WORD	328000H - 32FFFFH
	107	32K-WORD	320000H - 327FFFH
	106	32K-WORD	318000H - 31FFFFH
	105	32K-WORD	310000H - 317FFFH
	104	32K-WORD	308000H - 30FFFFH
	103	32K-WORD	300000H - 307FFFH
PLANE2 (UNIFORM PLANE)	102	32K-WORD	2F8000H - 2FFFFFH
	101	32K-WORD	2F0000H - 2F7FFFH
	100	32K-WORD	2E8000H - 2EFFFFH
	99	32K-WORD	2E0000H - 2E7FFFH
	98	32K-WORD	2D8000H - 2DFFFFH
	97	32K-WORD	2D0000H - 2D7FFFH
	96	32K-WORD	2C8000H - 2CFFFFH
	95	32K-WORD	2C0000H - 2C7FFFH
	94	32K-WORD	2B8000H - 2BFFFFH
	93	32K-WORD	2B0000H - 2B7FFFH
	92	32K-WORD	2A8000H - 2AFFFFH
	91	32K-WORD	2A0000H - 2A7FFFH
	90	32K-WORD	298000H - 29FFFFH
	89	32K-WORD	290000H - 297FFFH
	88	32K-WORD	288000H - 28FFFFH
	87	32K-WORD	280000H - 287FFFH
	86	32K-WORD	278000H - 27FFFFH
	85	32K-WORD	270000H - 277FFFH
	84	32K-WORD	268000H - 26FFFFH
	83	32K-WORD	260000H - 267FFFH
	82	32K-WORD	258000H - 25FFFFH
	81	32K-WORD	250000H - 257FFFH
	80	32K-WORD	248000H - 24FFFFH
	79	32K-WORD	240000H - 247FFFH
	78	32K-WORD	238000H - 23FFFFH
	77	32K-WORD	230000H - 237FFFH
	76	32K-WORD	228000H - 22FFFFH
	75	32K-WORD	220000H - 227FFFH
	74	32K-WORD	218000H - 21FFFFH
	73	32K-WORD	210000H - 217FFFH
	72	32K-WORD	208000H - 20FFFFH
	71	32K-WORD	200000H - 207FFFH

	BLOCK NUMBER		ADDRESS RANGE
PLANE1 (UNIFORM PLANE)	70	32K-WORD	1F8000H - 1FFFFFH
	69	32K-WORD	1F0000H - 1F7FFFH
	68	32K-WORD	1E8000H - 1EFFFFH
	67	32K-WORD	1E0000H - 1E7FFFH
	66	32K-WORD	1D8000H - 1DFFFFH
	65	32K-WORD	1D0000H - 1D7FFFH
	64	32K-WORD	1C8000H - 1CFFFFH
	63	32K-WORD	1C0000H - 1C7FFFH
	62	32K-WORD	1B8000H - 1BFFFFH
	61	32K-WORD	1B0000H - 1B7FFFH
	60	32K-WORD	1A8000H - 1AFFFFH
	59	32K-WORD	1A0000H - 1A7FFFH
	58	32K-WORD	198000H - 19FFFFH
	57	32K-WORD	190000H - 197FFFH
	56	32K-WORD	188000H - 18FFFFH
	55	32K-WORD	180000H - 187FFFH
	54	32K-WORD	178000H - 17FFFFH
	53	32K-WORD	170000H - 177FFFH
	52	32K-WORD	168000H - 16FFFFH
	51	32K-WORD	160000H - 167FFFH
	50	32K-WORD	158000H - 15FFFFH
	49	32K-WORD	150000H - 157FFFH
	48	32K-WORD	148000H - 14FFFFH
	47	32K-WORD	140000H - 147FFFH
	46	32K-WORD	138000H - 13FFFFH
	45	32K-WORD	130000H - 137FFFH
	44	32K-WORD	128000H - 12FFFFH
	43	32K-WORD	120000H - 127FFFH
	42	32K-WORD	118000H - 11FFFFH
	41	32K-WORD	110000H - 117FFFH
	40	32K-WORD	108000H - 10FFFFH
	39	32K-WORD	100000H - 107FFFH
PLANE0 (PARAMETER PLANE)	38	32K-WORD	0F8000H - 0FFFFFH
	37	32K-WORD	0F0000H - 0F7FFFH
	36	32K-WORD	0E8000H - 0EFFFFH
	35	32K-WORD	0E0000H - 0E7FFFH
	34	32K-WORD	0D8000H - 0DFFFFH
	33	32K-WORD	0D0000H - 0D7FFFH
	32	32K-WORD	0C8000H - 0CFFFFH
	31	32K-WORD	0C0000H - 0C7FFFH
	30	32K-WORD	0B8000H - 0BFFFFH
	29	32K-WORD	0B0000H - 0B7FFFH
	28	32K-WORD	0A8000H - 0AFFFFH
	27	32K-WORD	0A0000H - 0A7FFFH
	26	32K-WORD	098000H - 09FFFFH
	25	32K-WORD	090000H - 097FFFH
	24	32K-WORD	088000H - 08FFFFH
	23	32K-WORD	080000H - 087FFFH
	22	32K-WORD	078000H - 07FFFFH
	21	32K-WORD	070000H - 077FFFH
	20	32K-WORD	068000H - 06FFFFH
	19	32K-WORD	060000H - 067FFFH
	18	32K-WORD	058000H - 05FFFFH
	17	32K-WORD	050000H - 057FFFH
	16	32K-WORD	048000H - 04FFFFH
	15	32K-WORD	040000H - 047FFFH
	14	32K-WORD	038000H - 03FFFFH
	13	32K-WORD	030000H - 037FFFH
	12	32K-WORD	028000H - 02FFFFH
	11	32K-WORD	020000H - 027FFFH
	10	32K-WORD	018000H - 01FFFFH
	9	32K-WORD	010000H - 017FFFH
	8	32K-WORD	008000H - 00FFFFH
	7	4K-WORD	007000H - 007FFFH
	6	4K-WORD	006000H - 006FFFH
	5	4K-WORD	005000H - 005FFFH
	4	4K-WORD	004000H - 004FFFH
	3	4K-WORD	003000H - 003FFFH
	2	4K-WORD	002000H - 002FFFH
	1	4K-WORD	001000H - 001FFFH
	0	4K-WORD	000000H - 000FFFH

7.2 Memory Map - F_2 Selected (F_1-$\overline{CE}$ = "V_{IH}", F_2-$\overline{CE}$ = "V_{IL}")

Top Parameter

PLANE3 (PARAMETER PLANE)

BLOCK NUMBER		ADDRESS RANGE
134	4K-WORD	3FF000H - 3FFFFH
133	4K-WORD	3FE000H - 3FEFFH
132	4K-WORD	3FD000H - 3FDFFH
131	4K-WORD	3FC000H - 3FCFFH
130	4K-WORD	3FB000H - 3FBFFH
129	4K-WORD	3FA000H - 3FAFFH
128	4K-WORD	3F9000H - 3F9FFH
127	4K-WORD	3F8000H - 3F8FFH
126	32K-WORD	3F0000H - 3F7FFH
125	32K-WORD	3E8000H - 3EFFFH
124	32K-WORD	3E0000H - 3E7FFH
123	32K-WORD	3D8000H - 3DFFFH
122	32K-WORD	3D0000H - 3D7FFH
121	32K-WORD	3C8000H - 3CFFFH
120	32K-WORD	3C0000H - 3C7FFH
119	32K-WORD	3B8000H - 3BFFFH
118	32K-WORD	3B0000H - 3B7FFH
117	32K-WORD	3A8000H - 3AFFFH
116	32K-WORD	3A0000H - 3A7FFH
115	32K-WORD	398000H - 39FFFH
114	32K-WORD	390000H - 397FFH
113	32K-WORD	388000H - 38FFFH
112	32K-WORD	380000H - 387FFH
111	32K-WORD	378000H - 37FFFH
110	32K-WORD	370000H - 377FFH
109	32K-WORD	368000H - 36FFFH
108	32K-WORD	360000H - 367FFH
107	32K-WORD	358000H - 35FFFH
106	32K-WORD	350000H - 357FFH
105	32K-WORD	348000H - 34FFFH
104	32K-WORD	340000H - 347FFH
103	32K-WORD	338000H - 33FFFH
102	32K-WORD	330000H - 337FFH
101	32K-WORD	328000H - 32FFFH
100	32K-WORD	320000H - 327FFH
99	32K-WORD	318000H - 31FFFH
98	32K-WORD	310000H - 317FFH
97	32K-WORD	308000H - 30FFFH
96	32K-WORD	300000H - 307FFH

PLANE1 (UNIFORM PLANE)

BLOCK NUMBER		ADDRESS RANGE
63	32K-WORD	1F8000H - 1FFFFH
62	32K-WORD	1F0000H - 1F7FFH
61	32K-WORD	1E8000H - 1EFFFH
60	32K-WORD	1E0000H - 1E7FFH
59	32K-WORD	1D8000H - 1DFFFH
58	32K-WORD	1D0000H - 1D7FFH
57	32K-WORD	1C8000H - 1CFFFH
56	32K-WORD	1C0000H - 1C7FFH
55	32K-WORD	1B8000H - 1BFFFH
54	32K-WORD	1B0000H - 1B7FFH
53	32K-WORD	1A8000H - 1AFFFH
52	32K-WORD	1A0000H - 1A7FFH
51	32K-WORD	198000H - 19FFFH
50	32K-WORD	190000H - 197FFH
49	32K-WORD	188000H - 18FFFH
48	32K-WORD	180000H - 187FFH
47	32K-WORD	178000H - 17FFFH
46	32K-WORD	170000H - 177FFH
45	32K-WORD	168000H - 16FFFH
44	32K-WORD	160000H - 167FFH
43	32K-WORD	158000H - 15FFFH
42	32K-WORD	150000H - 157FFH
41	32K-WORD	148000H - 14FFFH
40	32K-WORD	140000H - 147FFH
39	32K-WORD	138000H - 13FFFH
38	32K-WORD	130000H - 137FFH
37	32K-WORD	128000H - 12FFFH
36	32K-WORD	120000H - 127FFH
35	32K-WORD	118000H - 11FFFH
34	32K-WORD	110000H - 117FFH
33	32K-WORD	108000H - 10FFFH
32	32K-WORD	100000H - 107FFH

PLANE2 (UNIFORM PLANE)

95	32K-WORD	2F8000H - 2FFFFH
94	32K-WORD	2F0000H - 2F7FFH
93	32K-WORD	2E8000H - 2EFFFH
92	32K-WORD	2E0000H - 2E7FFH
91	32K-WORD	2D8000H - 2DFFFH
90	32K-WORD	2D0000H - 2D7FFH
89	32K-WORD	2C8000H - 2CFFFH
88	32K-WORD	2C0000H - 2C7FFH
87	32K-WORD	2B8000H - 2BFFFH
86	32K-WORD	2B0000H - 2B7FFH
85	32K-WORD	2A8000H - 2AFFFH
84	32K-WORD	2A0000H - 2A7FFH
83	32K-WORD	298000H - 29FFFH
82	32K-WORD	290000H - 297FFH
81	32K-WORD	288000H - 28FFFH
80	32K-WORD	280000H - 287FFH
79	32K-WORD	278000H - 27FFFH
78	32K-WORD	270000H - 277FFH
77	32K-WORD	268000H - 26FFFH
76	32K-WORD	260000H - 267FFH
75	32K-WORD	258000H - 25FFFH
74	32K-WORD	250000H - 257FFH
73	32K-WORD	248000H - 24FFFH
72	32K-WORD	240000H - 247FFH
71	32K-WORD	238000H - 23FFFH
70	32K-WORD	230000H - 237FFH
69	32K-WORD	228000H - 22FFFH
68	32K-WORD	220000H - 227FFH
67	32K-WORD	218000H - 21FFFH
66	32K-WORD	210000H - 217FFH
65	32K-WORD	208000H - 20FFFH
64	32K-WORD	200000H - 207FFH

PLANE0 (UNIFORM PLANE)

31	32K-WORD	0F8000H - 0FFFFH
30	32K-WORD	0F0000H - 0F7FFH
29	32K-WORD	0E8000H - 0EFFFH
28	32K-WORD	0E0000H - 0E7FFH
27	32K-WORD	0D8000H - 0DFFFH
26	32K-WORD	0D0000H - 0D7FFH
25	32K-WORD	0C8000H - 0CFFFH
24	32K-WORD	0C0000H - 0C7FFH
23	32K-WORD	0B8000H - 0BFFFH
22	32K-WORD	0B0000H - 0B7FFH
21	32K-WORD	0A8000H - 0AFFFH
20	32K-WORD	0A0000H - 0A7FFH
19	32K-WORD	098000H - 09FFFH
18	32K-WORD	090000H - 097FFH
17	32K-WORD	088000H - 08FFFH
16	32K-WORD	080000H - 087FFH
15	32K-WORD	078000H - 07FFFH
14	32K-WORD	070000H - 077FFH
13	32K-WORD	068000H - 06FFFH
12	32K-WORD	060000H - 067FFH
11	32K-WORD	058000H - 05FFFH
10	32K-WORD	050000H - 057FFH
9	32K-WORD	048000H - 04FFFH
8	32K-WORD	040000H - 047FFH
7	32K-WORD	038000H - 03FFFH
6	32K-WORD	030000H - 037FFH
5	32K-WORD	028000H - 02FFFH
4	32K-WORD	020000H - 027FFH
3	32K-WORD	018000H - 01FFFH
2	32K-WORD	010000H - 017FFH
1	32K-WORD	008000H - 00FFFH
0	32K-WORD	000000H - 007FFH

8. Absolute Maximum Ratings

Symbol	Parameter	Notes	Ratings	Unit
V_{CC}	Supply voltage	1,2	-0.2 to +3.9	V
V_{IN}	Input voltage	1,2,3,4	-0.5 to V_{CC} +0.4	V
T_A	Operating temperature		-30 to +85	°C
T_{STG}	Storage temperature		-55 to +125	°C
F-V_{PP}	F-V_{PP} voltage	1,3	-0.2 to +12.6	V

Notes:

1. The maximum applicable voltage on any pins with respect to GND.
2. Except F-V_{PP}.
3. -1.0V undershoot is allowed when the pulse width is less than 5 nsec.
4. V_{IN} should not be over V_{CC} +0.4V.

9. Recommended DC Operating Conditions

(T_A = -30°C to +85°C)

Symbol	Parameter	Notes	Min.	Typ.	Max.	Unit
F-V_{CC}	Supply Voltage		2.7	3.0	3.3	V
S-V_{CC}	Supply Voltage		2.7		3.1	V
V_{PP}	F-V_{PP} Voltage (Write Operation)		1.65		3.3	V
	F-V_{PP} Voltage (Read Operation)		0		3.3	V
V_{IH}	Input Voltage		V_{CC} -0.4(2)		V_{CC} +0.3 (1)	V
V_{IL}	Input Voltage		-0.3		0.4	V

Notes:

1. V_{CC} is the lower of F-V_{CC} or S-V_{CC}.
2. V_{CC} is the higher of F-V_{CC} or S-V_{CC}.

10. Pin Capacitance(1)

(T_A = 25°C, f = 1MHz)

Symbol	Parameter	Notes	Min.	Typ.	Max.	Unit	Condition
C_{IN}	Input capacitance				20	pF	V_{IN} = 0V
$C_{I/O}$	I/O capacitance				30	pF	$V_{I/O}$ = 0V

Note:

1. Sampled but not 100% tested.

11. DC Electrical Characteristics[1, 12]

DC Electrical Characteristics

(T_A = -30°C to +85°C, F-V_{CC} = 2.7V to 3.3V, S-V_{CC} = 2.7V to 3.1V)

Symbol	Parameter		Notes	Min.	Typ.	Max.	Unit	Test Conditions
I_{LI}	Input Leakage Current					±2.5	µA	V_{IN} = V_{CC} or GND
I_{LO}	Output Leakage Current					±2.5	µA	V_{OUT} = V_{CC} or GND
I_{CCS}	F-V_{CC} Standby Current		2,14		8	40	µA	F-V_{CC} = F-V_{CC} Max., F-$\overline{CE}$ = F-$\overline{RST}$ = F-V_{CC} ±0.2V, F-$\overline{WP}$ = F-V_{CC} or GND
I_{CCAS}	F-V_{CC} Automatic Power Savings Current		2,5,10		8	40	µA	F-V_{CC} = F-V_{CC} Max., F-$\overline{CE}$ = GND ±0.2V, F-$\overline{WP}$ = F-V_{CC} or GND
I_{CCD}	F-V_{CC} Reset Power-Down Current		2		8	40	µA	F-$\overline{RST}$ = GND ±0.2V I_{OUT} (F-RY/$\overline{BY}$) = 0mA
I_{CCR}	Average F-V_{CC} Read Current Normal Mode		2,10,13		16	26	mA	F-V_{CC} = F-V_{CC} Max., F-$\overline{CE}$ = V_{IL}, F-$\overline{OE}$ = V_{IH}, f = 5MHz I_{OUT} = 0mA
	Average F-V_{CC} Read Current Page Mode	8 Word Read	2,10,13		6	11	mA	
I_{CCW}	F-V_{CC} (Page Buffer) Program Current		2,6,11,13		21	61	mA	F-V_{PP} = V_{PPH}
I_{CCE}	F-V_{CC} Block Erase, Full Chip Erase Current		2,6,11,13		11	31	mA	F-V_{PP} = V_{PPH}
I_{CCWS} I_{CCES}	F-V_{CC} (Page Buffer) Program or Block Erase Suspend Current		2,3,13		10	200	µA	F-$\overline{CE}$ = V_{IH}
I_{PPS} I_{PPR}	F-V_{PP} Standby or Read Current		2,7,13		4	10	µA	F-V_{PP} ≤ F-V_{CC}
I_{PPW}	F-V_{PP} (Page Buffer) Program Current		2,6,7,11,13		2	5	µA	F-V_{PP} = V_{PPH}
I_{PPE}	F-V_{PP} Block Erase, Full Chip Erase Current		2,6,7,11,13		2	5	µA	F-V_{PP} = V_{PPH}
I_{PPWS}	F-V_{PP} (Page Buffer) Program Suspend Current		2,7,13		2	5	µA	F-V_{PP} = V_{PPH}
I_{PPES}	F-V_{PP} Block Erase Suspend Current		2,7,13		2	5	µA	F-V_{PP} = V_{PPH}

DC Electrical Characteristics (Continue)

(T_A = -30°C to +85°C, F-V_{CC} = 2.7V to 3.3V, S-V_{CC} = 2.7V to 3.1V)

Symbol	Parameter	Notes	Min.	Typ.	Max.	Unit	Test Conditions
I_{SB}	S-V_{CC} Standby Current	8			100	µA	S-$\overline{CE}_1$, S-CE_2 ≥ S-V_{CC} - 0.2V
I_{SLP}	S-V_{CC} Sleep Mode Current	9			30	µA	S-$\overline{CE}_1$ ≥ S-V_{CC} - 0.2V, S-CE_2 ≤ 0.2V
I_{CC1}	S-V_{CC} Operation Current				50	mA	t_{CYCLE} = Min., $I_{I/O}$ = 0mA, S-$\overline{CE}_1$ = V_{IL}
V_{IL}	Input Low Voltage	6	-0.3		0.4	V	
V_{IH}	Input High Voltage	6	V_{CC} -0.4		V_{CC} +0.3	V	
V_{OL}	Output Low Voltage	6,14			0.2V_{CC}	V	I_{OL} = 0.5mA
V_{OH}	Output High Voltage	6	0.8V_{CC}			V	I_{OH} = -0.5mA
V_{PPLK}	F-V_{PP} Lockout during Normal Operations	4,6,7			0.4	V	
V_{PPH}	F-V_{PP} during Block Erase, Full Chip Erase,(PageBuffer) Program	7	1.65	3	3.3	V	
V_{LKO}	F-V_{CC} Lockout Voltage		1.5			V	

Notes:

1. V_{CC} includes both F-V_{CC} and S-V_{CC}.
2. All currents are in RMS unless otherwise noted. Typical values are the reference values at V_{CC} = 3.0V and T_A = +25°C unless V_{CC} is specified.
3. I_{CCWS} and I_{CCES} are specified with the device de-selected. If read or (page buffer) program while in block erase suspend mode, the device's current draw is the sum of I_{CCWS} or I_{CCES} and I_{CCR} or I_{CCW}, respectively.
4. Block erase, full chip erase, (page buffer) program are inhibited when $V_{PP} \le V_{PPLK}$, and not guaranteed outside the specified voltage.
5. The Automatic Power Savings (APS) feature automatically places the device in power save mode after read cycle completion. Standard address access timings (t_{AVQV}) provide new data when addresses are changed.
6. Sampled, not 100% tested.
7. F-V_{PP} is not used for power supply pin. With F-$V_{PP} \le V_{PPLK}$, block erase, full chip erase, (page buffer) program cannot be executed and should not be attempted.
   Applying 12V ±0.3V to F-V_{PP} provides fast erasing or fast programming mode. In this mode, F-V_{PP} is power supply pin and supplies the memory cell current for block erasing and (page buffer) programming. Use similar power supply trace widths and layout considerations given to the V_{CC} power bus.
   Applying 12V ±0.3V to F-V_{PP} during erase/program can only be done for a maximum of 1000 cycles on each block.
   F-V_{PP} may be connected to 12V ±0.3V for a total of 80 hours maximum.
8. Memory cell data is held. (S-CE_2 = "V_{IH}")
9. Memory cell data is not held. (S-CE_2 = "V_{IL}")
10. Never hold F_1-$\overline{CE}$ low and F_2-$\overline{CE}$ low at the same timing.
11. F_1 and F_2 should not be operated at the same timing to Block erase, full chip erase, (page buffer) program.
12. The current value about Flash memory expresses the consumption current per one chip. The consumption current of the whole Flash memory becomes the value which added of F_1 and F_2.
13. The operating current in dual work is the sum of the operating current (read, erase, program) in each plane.
14. Includes F-RY/$\overline{BY}$.

12. AC Electrical Characteristics for Flash Memory

12.1 AC Test Conditions

Input pulse level	0 V to 2.7 V
Input rise and fall time	5 ns
Input and Output timing Ref. level	1.35 V
Output load	1TTL + C_L (50pF)

12.2 Read Cycle

(T_A = -30°C to +85°C, F-V_{CC} = 2.7V to 3.3V)

Symbol	Parameter	Notes	Min.	Max.	Unit
t_{AVAV}	Read Cycle Time		65		ns
t_{AVQV}	Address to Output Delay			65	ns
t_{ELQV}	F-$\overline{CE}$ to Output Delay	2		65	ns
t_{APA}	Page Address Access Time			25	ns
t_{GLQV}	F-$\overline{OE}$ to Output Delay	2		20	ns
t_{PHQV}	F-$\overline{RST}$ High to Output Delay			150	ns
t_{EHQZ}, t_{GHQZ}	F-$\overline{CE}$ or F-$\overline{OE}$ to Output in High-Z, Whichever Occurs First	1		20	ns
t_{ELQX}	F-$\overline{CE}$ to Output in Low-Z	1	0		ns
t_{GLQX}	F-$\overline{OE}$ to Output in Low-Z	1	0		ns
t_{OH}	Output Hold from First Occurring Address, F-$\overline{CE}$ or F-$\overline{OE}$ change	1	0		ns

Notes:

1. Sampled, not 100% tested.
2. F-$\overline{OE}$ may be delayed up to $t_{ELQV} - t_{GLQV}$ after the falling edge of F-$\overline{CE}$ without impact to t_{ELQV}.

12.3 Write Cycle (F-$\overline{WE}$ / F-$\overline{CE}$ Controlled)[1,2,9]

(T_A = -30°C to +85°C, F-V_{CC} = 2.7V to 3.3V)

Symbol	Parameter	Notes	Min.	Max.	Unit
t_{AVAV}	Write Cycle Time		65		ns
t_{PHWL} (t_{PHEL})	F-$\overline{RST}$ High Recovery to F-$\overline{WE}$ (F-$\overline{CE}$) Going Low	3	150		ns
t_{ELWL} (t_{WLEL})	F-$\overline{CE}$ (F-$\overline{WE}$) Setup to F-$\overline{WE}$ (F-$\overline{CE}$) Going Low	4	0		ns
t_{WLWH} (t_{ELEH})	F-$\overline{WE}$ (F-$\overline{CE}$) Pulse Width	4	50		ns
t_{DVWH} (t_{DVEH})	Data Setup to F-$\overline{WE}$ (F-$\overline{CE}$) Going High	8	40		ns
t_{AVWH} (t_{AVEH})	Address Setup to F-$\overline{WE}$ (F-$\overline{CE}$) Going High	8	50		ns
t_{WHEH} (t_{EHWH})	F-$\overline{CE}$ (F-$\overline{WE}$) Hold from F-$\overline{WE}$ (F-$\overline{CE}$) High		0		ns
t_{WHDX} (t_{EHDX})	Data Hold from F-$\overline{WE}$ (F-$\overline{CE}$) High		0		ns
t_{WHAX} (t_{EHAX})	Address Hold from F-$\overline{WE}$ (F-$\overline{CE}$) High		0		ns
t_{WHWL} (t_{EHEL})	F-$\overline{WE}$ (F-$\overline{CE}$) Pulse Width High	5	15		ns
t_{SHWH} (t_{SHEH})	F-$\overline{WP}$ High Setup to F-$\overline{WE}$ (F-$\overline{CE}$) Going High	3	0		ns
t_{VVWH} (t_{VVEH})	F-V_{PP} Setup to F-$\overline{WE}$ (F-$\overline{CE}$) Going High	3	200		ns
t_{WHGL} (t_{EHGL})	Write Recovery before Read		30		ns
t_{QVSL}	F-$\overline{WP}$ High Hold from Valid SRD, F-RY/$\overline{BY}$ High-Z	3, 6	0		ns
t_{QVVL}	F-V_{PP} Hold from Valid SRD, F-RY/$\overline{BY}$ High-Z	3, 6	0		ns
t_{WHR0} (t_{EHR0})	F-$\overline{WE}$ (F-$\overline{CE}$) High to SR.7 Going "0"	3, 7		t_{AVQV}+50	ns
t_{WHRL} (t_{EHRL})	F-$\overline{WE}$ (F-$\overline{CE}$) High to F-RY/$\overline{BY}$ Going Low	3		100	ns

Notes:

1. The timing characteristics for reading the status register during block erase, full chip erase, (page buffer) program operations are the same as during read-only operations. See the AC Characteristics for read cycle.
2. A write operation can be initiated and terminated with either F-$\overline{CE}$ or F-$\overline{WE}$.
3. Sampled, not 100% tested.
4. Write pulse width (t_{WP}) is defined from the falling edge of F-$\overline{CE}$ or F-$\overline{WE}$ (whichever goes low last) to the rising edge of F-$\overline{CE}$ or F-$\overline{WE}$ (whichever goes high first). Hence, $t_{WP}=t_{WLWH}=t_{ELEH}=t_{WLEH}=t_{ELWH}$.
5. Write pulse width high (t_{WPH}) is defined from the rising edge of F-$\overline{CE}$ or F-$\overline{WE}$ (whichever goes high first) to the falling edge of F-$\overline{CE}$ or F-$\overline{WE}$ (whichever goes low last). Hence, $t_{WPH}=t_{WHWL}=t_{EHEL}=t_{WHEL}=t_{EHWL}$.
6. F-V_{PP} should be held at F-V_{PP}=V_{PPH} until determination of block erase, (page buffer) program success (SR.1/3/4/5=0) and held at F-V_{PP}=V_{PPH} until determination of full chip erase success (SR.1/3/5=0).
7. t_{WHR0} (t_{EHR0}) after the Read Query or Read Identifier Codes command=t_{AVQV}+100ns.
8. See 5.1 Command Definitions for valid address and data for block erase, full chip erase, (page buffer) program or lock bit configuration.
9. F_1 and F_2 should not be operated at the same timing to Block erase, full chip erase, (page buffer) program .

12.4 Block Erase, Full Chip Erase, (Page Buffer) Program Performance[3]

(T_A = -30°C to +85°C, F-V_{CC} = 2.7V to 3.3V)

Symbol	Parameter	Notes	Page Buffer Command is Used or not Used	F-V_{PP}=V_{PPH} (In System)			Unit
				Min.	Typ.[1]	Max.[2]	
t_{WPB}	4K-Word Parameter Block Program Time	2	Not Used		0.05	0.3	s
		2	Used		0.03	0.12	s
t_{WMB}	32K-Word Main Block Program Time	2	Not Used		0.38	2.4	s
		2	Used		0.24	1	s
t_{WHQV1}/ t_{EHQV1}	Word Program Time	2	Not Used		11	200	µs
		2	Used		7	100	µs
t_{WHQV2}/ t_{EHQV2}	4K-Word Parameter Block Erase Time	2	-		0.3	4	s
t_{WHQV3}/ t_{EHQV3}	32K-Word Main Block Erase Time	2	-		0.6	5	s
	Full Chip Erase Time	2			80	700	s
t_{WHRH1}/ t_{EHRH1}	(Page Buffer) Program Suspend Latency Time to Read	4	-		5	10	µs
t_{WHRH2}/ t_{EHRH2}	Block Erase Suspend Latency Time to Read	4	-		5	20	µs
t_{ERES}	Latency Time from Block Erase Resume Command to Block Erase Suspend Command	5	-	500			µs

Notes:

1. Typical values measured at F-V_{CC} =3.0V, F-V_{PP} =3.0V, and T_A=+25°C. Assumes corresponding lock bits are not set. Subject to change based on device characterization.
2. Excludes external system-level overhead.
3. Sampled, but not 100% tested.
4. A latency time is required from writing suspend command (F-$\overline{WE}$ or F-$\overline{CE}$ going high) until SR.7 going “1”or F-RY/$\overline{BY}$ going High-Z.
5. If the interval time from a Block Erase Resume command to a subsequent Block Erase Suspend command is shorter than t_{ERES} and its sequence is repeated, the block erase operation may not be finished.

12.5 Flash Memory AC Characteristics Timing Chart

AC Waveform for Single Asynchronous Read Operations from Status Register, Identifier Codes or Query Code

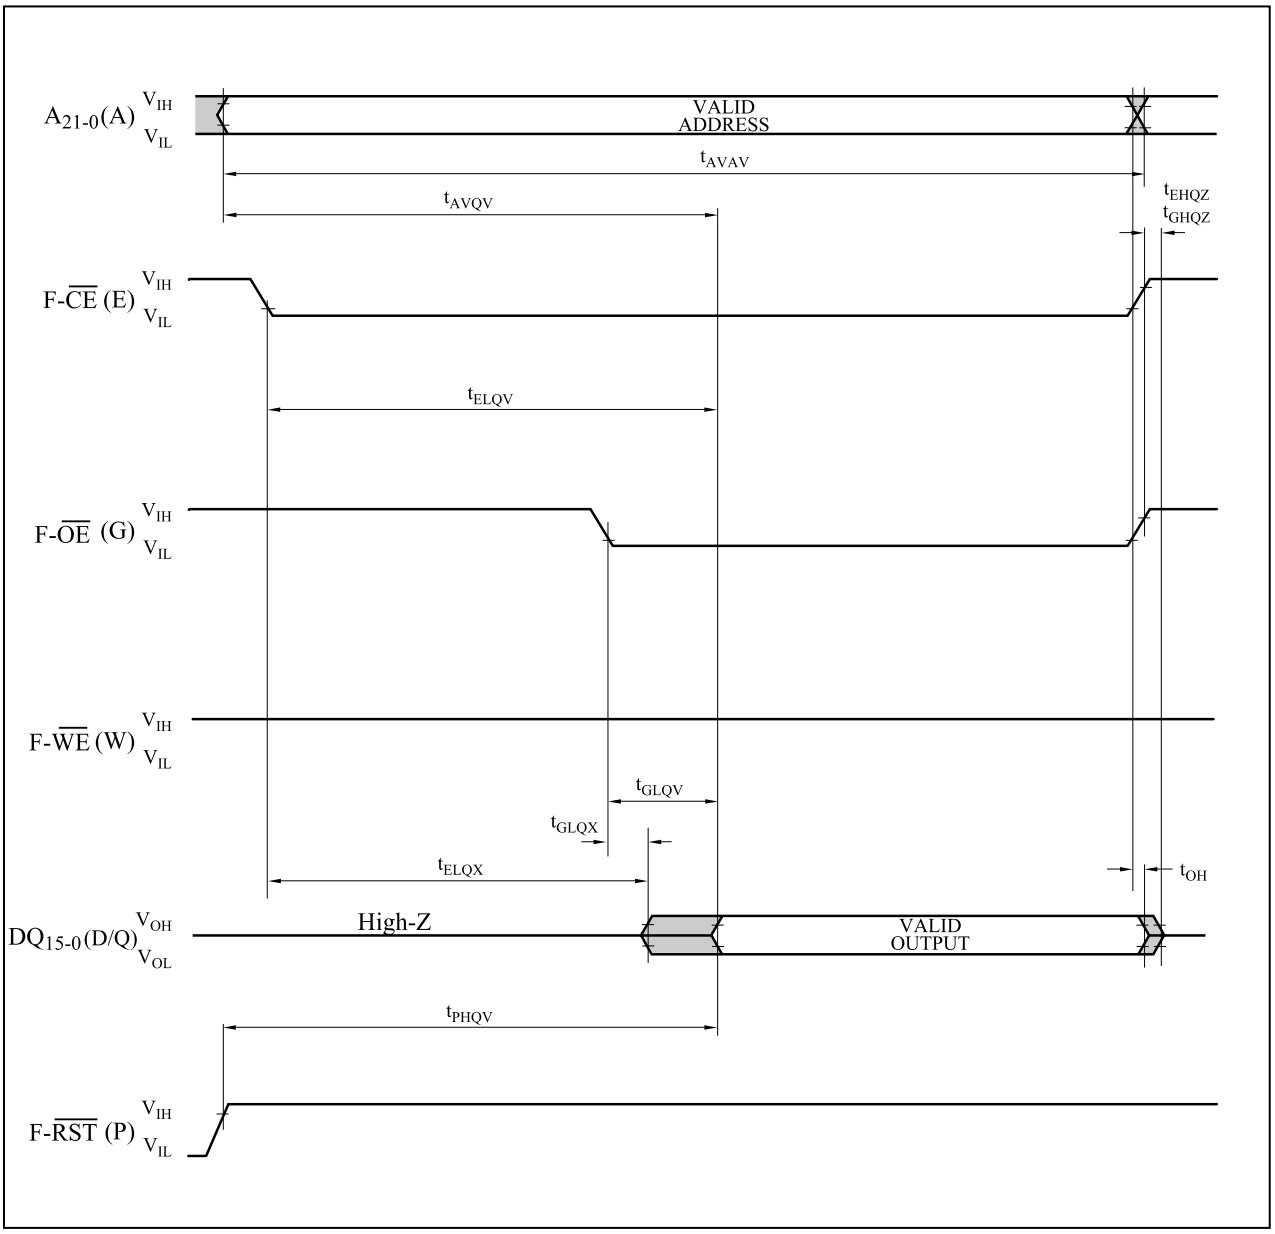

AC Waveform for Asynchronous 4-Word Page Mode Read Operations from Main Blocks or Parameter Blocks

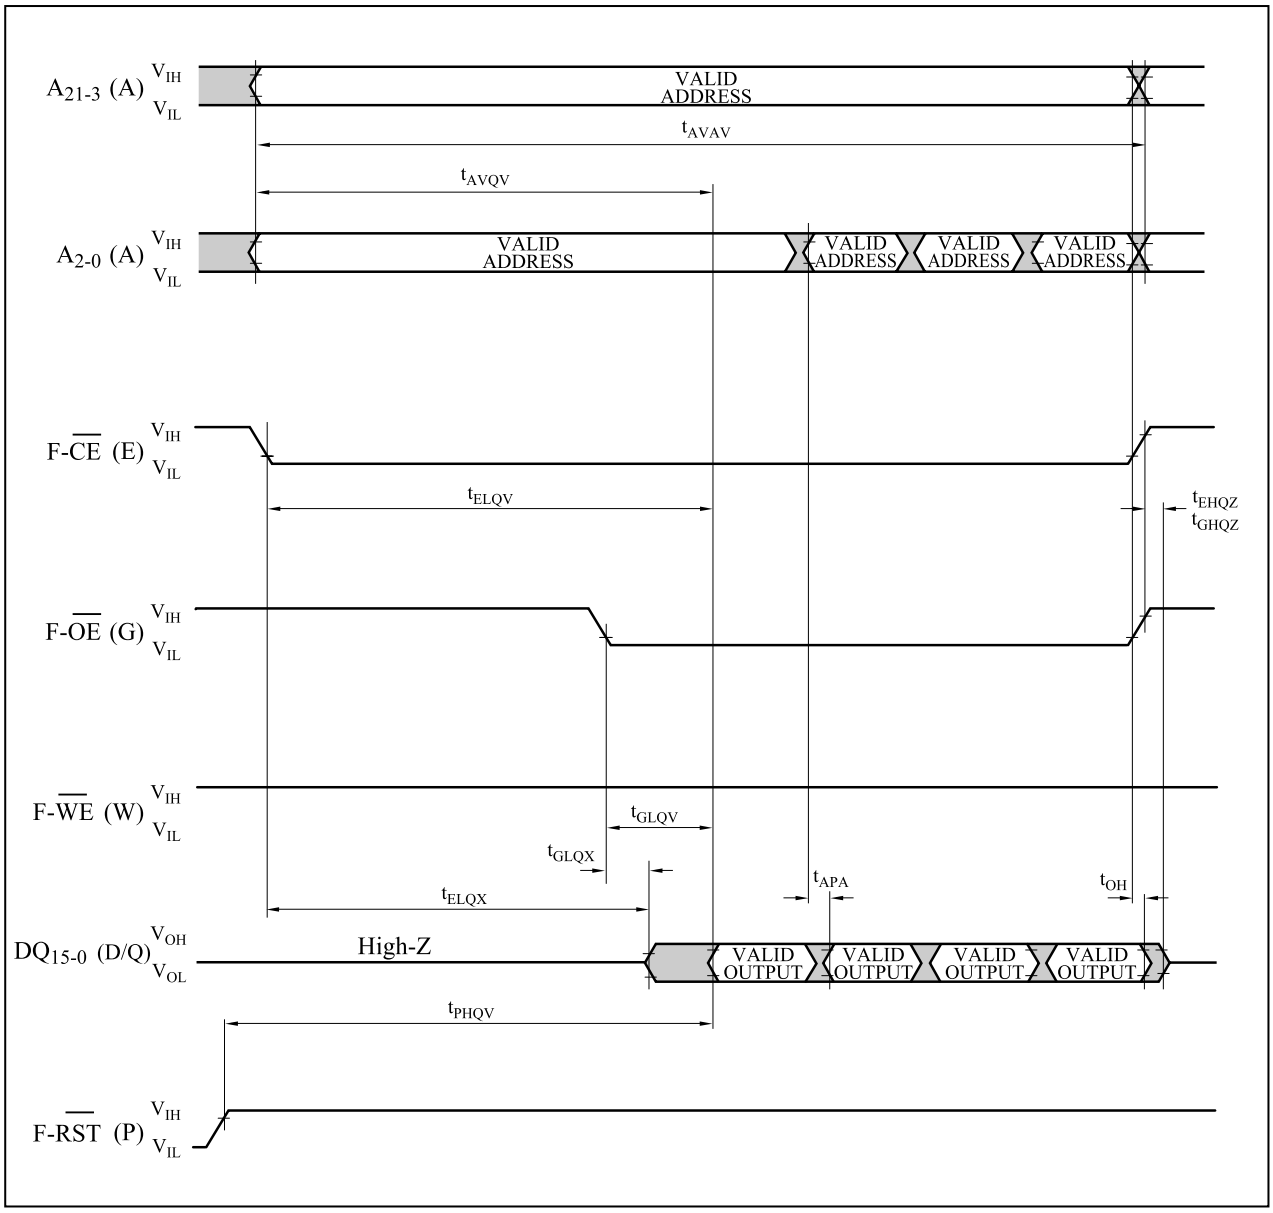

AC Waveform for Asynchronous 8-Word Page Mode Read Operations from Main Blocks or Parameter Blocks

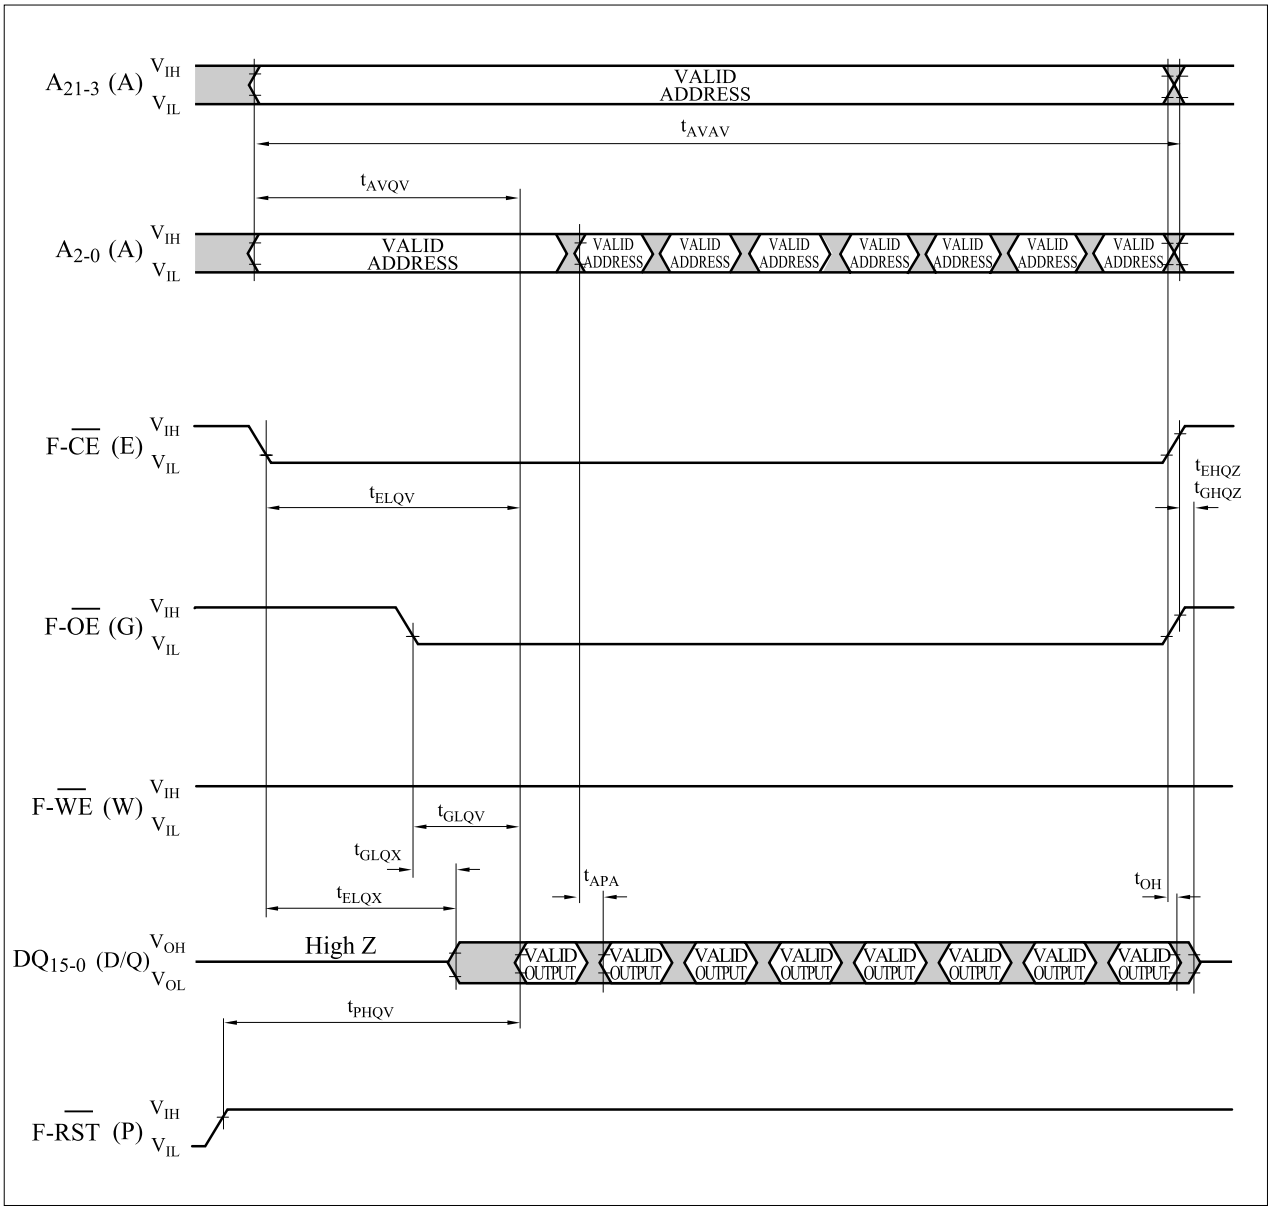

AC Waveform for Write Operations(F-$\overline{WE}$ / F-$\overline{CE}$ Controlled)

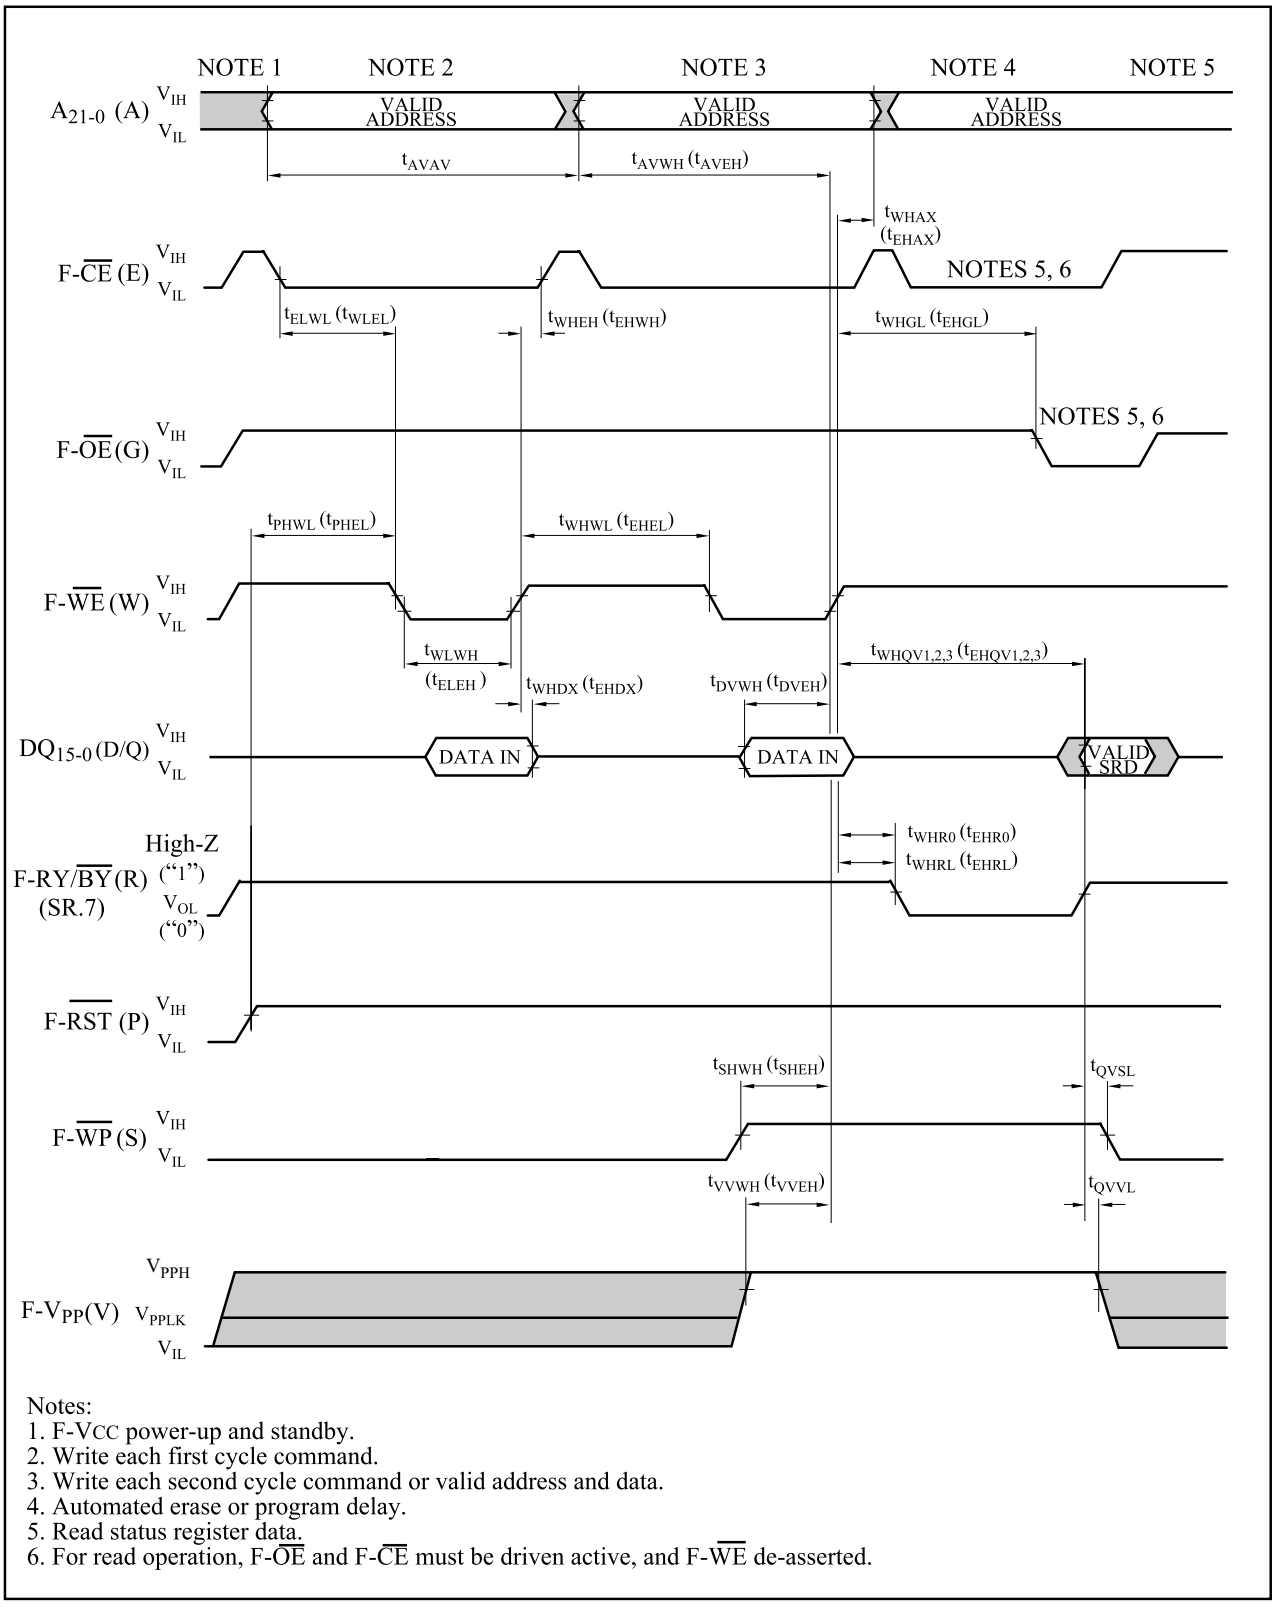

Notes:
1. F-V_{CC} power-up and standby.
2. Write each first cycle command.
3. Write each second cycle command or valid address and data.
4. Automated erase or program delay.
5. Read status register data.
6. For read operation, F-$\overline{OE}$ and F-$\overline{CE}$ must be driven active, and F-$\overline{WE}$ de-asserted.

12.6 Reset Operations

(T_A = -30°C to +85°C, F-V_{CC} = 2.7V to 3.3V)

Symbol	Parameter	Notes	Min.	Max.	Unit
t_{PLPH}	F-$\overline{RST}$ Low to Reset during Read (F-$\overline{RST}$ should be low during power-up.)	1, 2, 3	100		ns
t_{PLRH}	F-$\overline{RST}$ Low to Reset during Erase or Program	1, 3, 4		22	µs
t_{VPH}	F-V_{CC} 2.7V to F-$\overline{RST}$ High	1, 3, 5	100		ns
t_{VHQV}	F-V_{CC} 2.7V to Output Delay	3		1	ms

Notes:

1. A reset time, t_{PHQV}, is required from the later of SR.7 (F-RY/$\overline{BY}$) going "1" (High-Z) or F-$\overline{RST}$ going high until outputs are valid. See the AC Characteristics - read cycle for t_{PHQV}.
2. t_{PLPH} is <100ns the device may still reset but this is not guaranteed.
3. Sampled, not 100% tested.
4. If F-$\overline{RST}$ asserted while a block erase, full chip erase or (page buffer) program operation is not executing, the reset will complete within 100ns.
5. When the device power-up, holding F-$\overline{RST}$ low minimum 100ns is required after F-V_{CC} has been in predefined range and also has been in stable there.

AC Waveform for Reset Operation

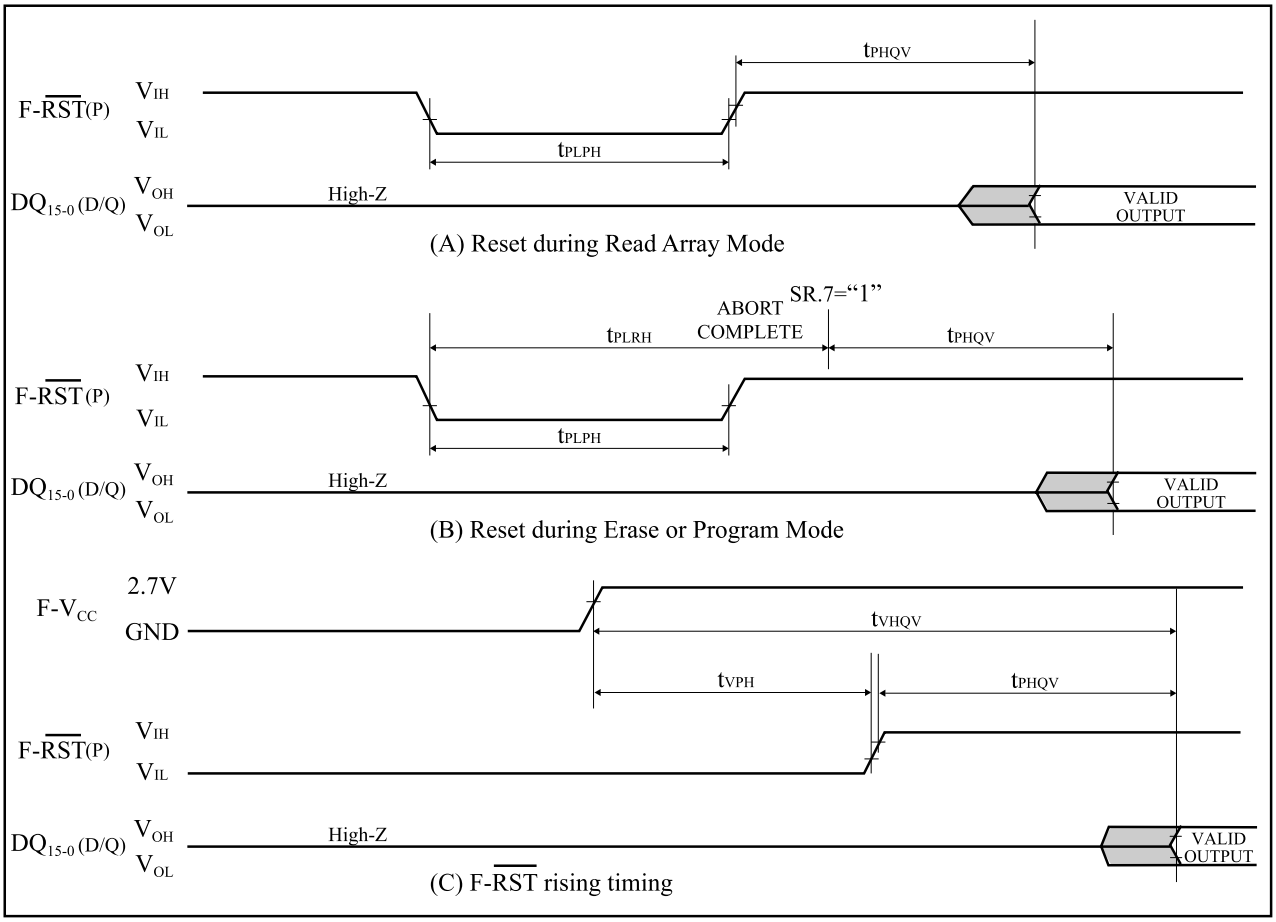

13. AC Electrical Characteristics for Smartcombo RAM

13.1 AC Test Conditions

Input Pulse Level	0.2V_{CC} to 0.8V_{CC}
Input Rise and Fall Time	5 ns
Input and Output Timing Ref. Level	1/2 V_{CC}
Output Load	1TTL +C_L (50pF) (1, 2)

Notes:

1. Including scope and socket capacitance.
2. AC characteristics directed with the note should be measured with the output load shown in below.

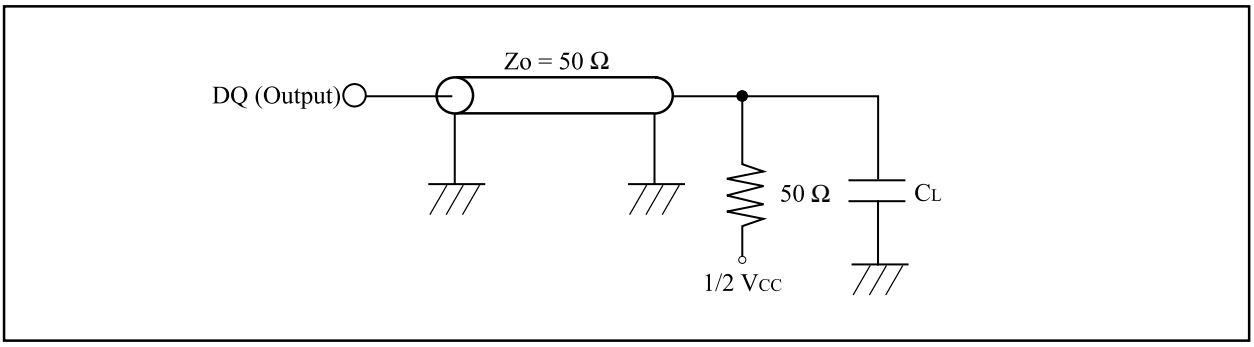

13.2 Read Cycle

(T_A = -30°C to +85°C, V_{CC} = 2.7V to 3.1V)

Symbol	Parameter	Notes	Min.	Max.	Unit
t_{RC}	Read Cycle Time		65		ns
t_{AA}	Address Access Time			65	ns
t_{ACE}	Chip Enable Access Time			65	ns
t_{OE}	Output Enable to Output Valid			45	ns
t_{BE}	Byte Enable Access Time			65	ns
t_{OH}	Output Hold from Address Change		5		ns
t_{CLZ}	S-$\overline{CE}_1$ Low to Output Active		10		ns
t_{OLZ}	S-$\overline{OE}$ Low to Output Active		5		ns
t_{BLZ}	S-$\overline{UB}$ or S-$\overline{LB}$ Low to Output Active		5		ns
t_{CHZ}	S-$\overline{CE}_1$ High to Output in High-Z			25	ns
t_{OHZ}	S-$\overline{OE}$ High to Output in High-Z			25	ns
t_{BHZ}	S-$\overline{UB}$ or S-$\overline{LB}$ High to Output in High-Z			25	ns
t_{ASO}	Address Setup to S-$\overline{OE}$ Low		0		ns
t_{OHAH}	S-$\overline{OE}$ High Level to Address Hold		-5		ns
t_{CHAH}	S-$\overline{CE}_1$ High Level to Address Hold		0		ns
t_{BHAH}	S-$\overline{LB}$, S-$\overline{UB}$ High Level to Address Hold	1	0		ns
t_{CLOL}	S-$\overline{CE}_1$ Low Level to S-$\overline{OE}$ Low Level	2	0	10,000	ns
t_{OLCH}	S-$\overline{OE}$ Low Level to S-$\overline{CE}_1$ High Level		45		ns
t_{CP}	S-$\overline{CE}_1$ High Level Pulse Width		10		ns
t_{BP}	S-$\overline{LB}$, S-$\overline{UB}$ High Level Pulse Width		10		ns
t_{OP}	S-$\overline{OE}$ High Level Pulse Width	2	2	10,000	ns

Notes:

1. t_{BHAH} is specified after both S-$\overline{LB}$ and S-$\overline{UB}$ are High.
2. t_{CLOL} and t_{OP} (Max.) are applied while S-$\overline{CE}_1$ is being hold at low level.

13.3 Write Cycle

(T_A = -30°C to +85°C, V_{CC} = 2.7V to 3.1V)

Symbol	Parameter	Notes	Min.	Max.	Unit
t_{WC}	Write Cycle Time		65		ns
t_{CW}	Chip Enable to End of Write		55		ns
t_{AW}	Address Valid to End of Write		55		ns
t_{BW}	Byte Select Time		55		ns
t_{WP}	Write Pulse Width		50		ns
t_{WR}	Write Recovery Time		0		ns
t_{CP}	S-$\overline{CE}_1$ High Level Pulse Width		10		ns
t_{BP}	S-$\overline{LB}$, S-$\overline{UB}$ High Level Pulse Width		10		ns
t_{WHP}	S-$\overline{WE}$ High Pulse Width		10		ns
t_{WHZ}	S-$\overline{WE}$ Low to Output in High-Z			25	ns
t_{OW}	S-$\overline{WE}$ High to Output Active		15		ns
t_{AS}	Address Setup Time		0		ns
t_{OHAH}	S-$\overline{OE}$ High Level to Address Hold		-5		ns
t_{CHAH}	S-$\overline{CE}_1$ High Level to Address Hold		0		ns
t_{BHAH}	S-$\overline{LB}$, S-$\overline{UB}$ High Level to Address Hold	1	0		ns
t_{DW}	Input Data Setup Time		30		ns
t_{DH}	Input Data Hold Time		0		ns
t_{OES}	S-$\overline{OE}$ High Level to S-$\overline{WE}$ Set	2	0	10,000	ns
t_{OEH}	S-$\overline{WE}$ High Level to S-$\overline{OE}$ Set	2	10	10,000	ns

Notes:

1. t_{BHAH} is specified after both S-$\overline{LB}$ and S-$\overline{UB}$ are High.
2. t_{OES} and t_{OEH} (Max.) are applied while S-$\overline{CE}_1$ is being hold at low level.

13.4 Initialization

(T_A = -30°C to +85°C, V_{CC} = 2.7V to 3.1V)

Symbol	Parameter	Notes	Min.	Max.	Unit
t_{VHMH}	Power Application to S-CE_2 Low Level Hold		50		µs
t_{CHMH}	S-$\overline{CE}_1$ High Level to S-CE_2 High Level		10		ns
t_{MHCL}	Following Power Application S-CE_2 High Level Hold to S-$\overline{CE}_1$ Low Level	1	200		µs

Note:

1. When giving compatibility with the other type of Smartcombo RAM, 200µs must be changed to 300µs.

13.5 Sleep Mode Entry / Exit

(T_A = -30°C to +85°C, V_{CC} = 2.7V to 3.1V)

Symbol	Parameter	Notes	Min.	Max.	Unit
t_{CHML}	Sleep Mode Entry S-$\overline{CE}_1$ High Level to S-CE_2 Low Level		0		ns
t_{MHCL}	Sleep Mode Exit to Normal Operation S-CE_2 High Level to S-$\overline{CE}_1$ Low Level		200		µs

13.6 Initialization

Initialize the power application using the following sequence to stabilize internal circuits.

(1) Following power application, make S-CE_2 high level after fixing S-CE_2 to low level for the period of t_{VHMH}. Make S-$\overline{CE}_1$ high level before making S-CE_2 high level.

(2) S-$\overline{CE}_1$ and S-CE_2 are fixed to high level for the period of t_{MHCL}.

Normal operation is possible after the completion of initialization.

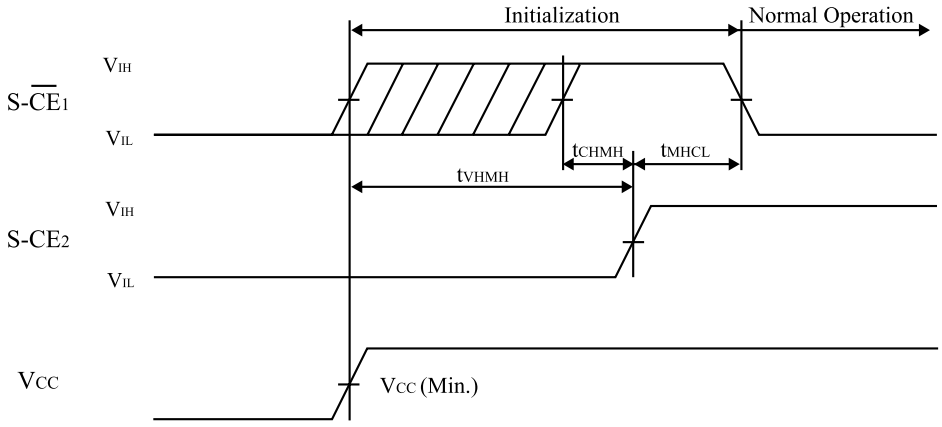

Notes:

1. Make S-CE_2 low level when starting the power supply.
2. t_{VHMH} is specified from when the power supply voltage reaches the prescribed minimum value (V_{CC} Min.).

Standby Mode State Machine

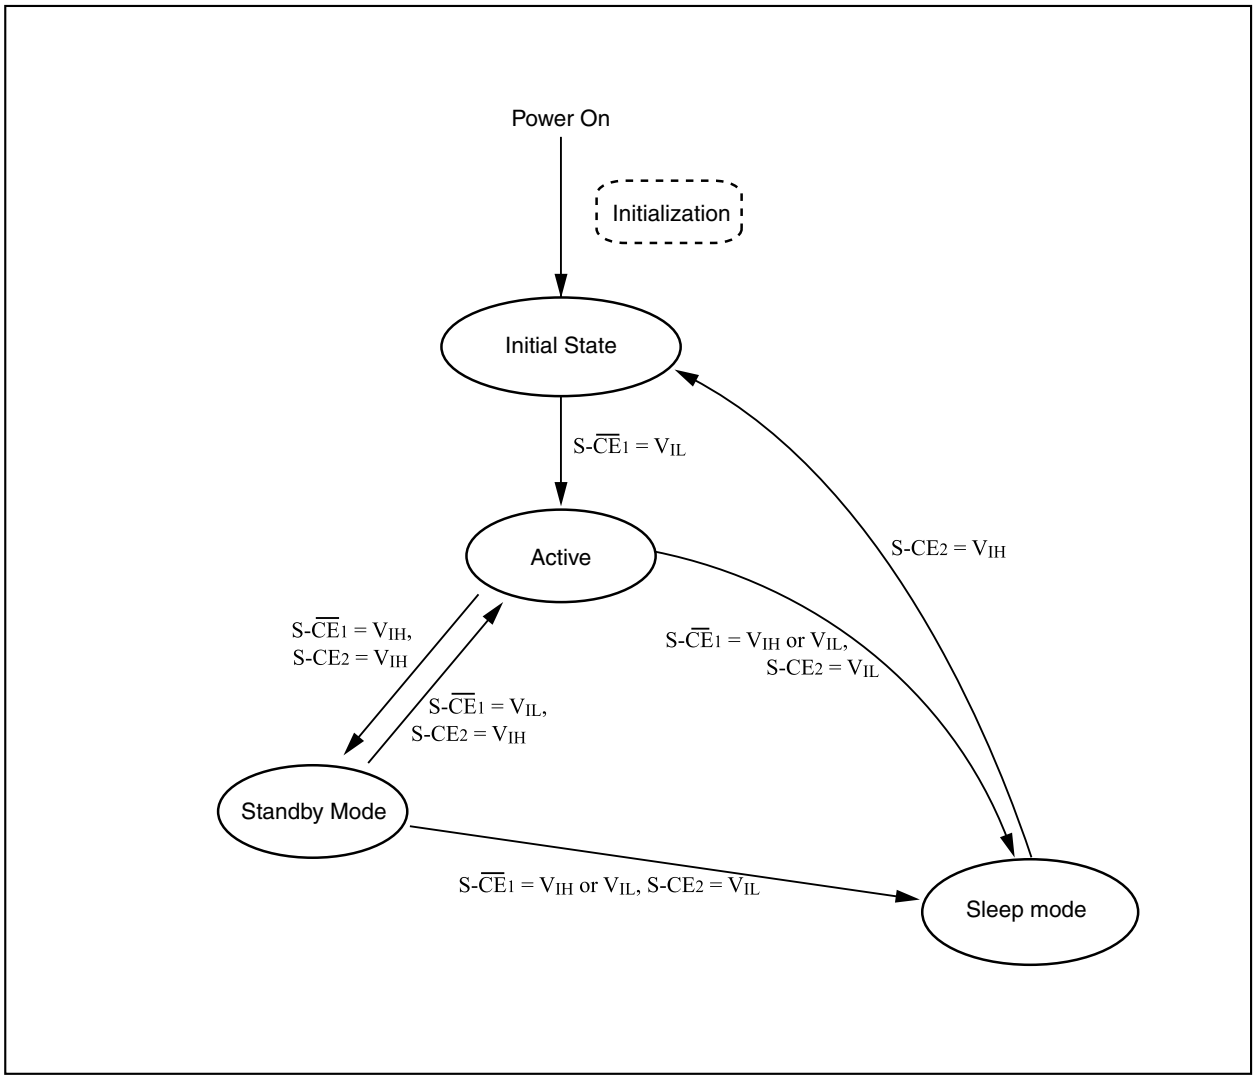

13.7 Mode Register Settings

The sleep mode can be set using the mode register. Since the initial value of the mode register at power application is undefined, be sure to set the mode register after initialization at power application.

13.8 Mode Register Setting Method

The mode register setting mode can be entered by successively writing two specific data after two continuous reads of the highest address (1FFFFFH). The mode register setting is a continuous four-cycle operation (two read cycles and two write cycles).

Commands are written to the command register. The command register is used to latch the addresses and data required for executing commands, and it does not have an exclusive memory area.

For the timing chart and flow chart, refer to Mode Register Setting Timing Chart (P.46), Mode Register Setting Flow Chart (P.47).

Following table shows the commands and command sequences.

Command Sequence

Command Sequence	1st Bus Cycle (Read Cycle)		2nd Bus Cycle (Read Cycle)		3rd Bus Cycle (Write Cycle)		4th Bus Cycle (Write Cycle)	
	Address	Data	Address	Data	Address	Data	Address	Data
Sleep Mode	1FFFFFH	-	1FFFFFH	-	1FFFFFH	00H	1FFFFFH	07H

4th Bus Cycle (Write cycle)

DQ	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Mode Register Setting	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1

13.9 Cautions for Setting Mode Register

Since, for the mode register setting, the internal counter status is judged by toggling S-$\overline{CE}_1$ and S-$\overline{OE}$, toggle S-$\overline{CE}_1$ at every cycle during entry (read cycle twice, write cycle twice), and toggle S-$\overline{OE}$ like S-$\overline{CE}_1$ at the first and second read cycles.

If incorrect addresses or data are written, or if addresses or data are written in the incorrect order, the setting of the mode register are not performed correctly.

When the highest address (1FFFFFH) is read consecutively three or more times, the mode register setting entries are cancelled.

Once the sleep mode has been set in the mode register, these settings are retained until they are set again, while applying the power supply. However, the mode register setting will become undefined if the power is turned off, so set the mode register again after power application.

For the timing chart and flow chart, refer to Mode Register Setting Timing Chart (P.46), Mode Register Setting Flow Chart (P.47).

13.10 Smartcombo RAM AC Characteristics Timing Chart

Read Cycle Timing Chart 1 (S-$\overline{CE}_1$ Controlled)

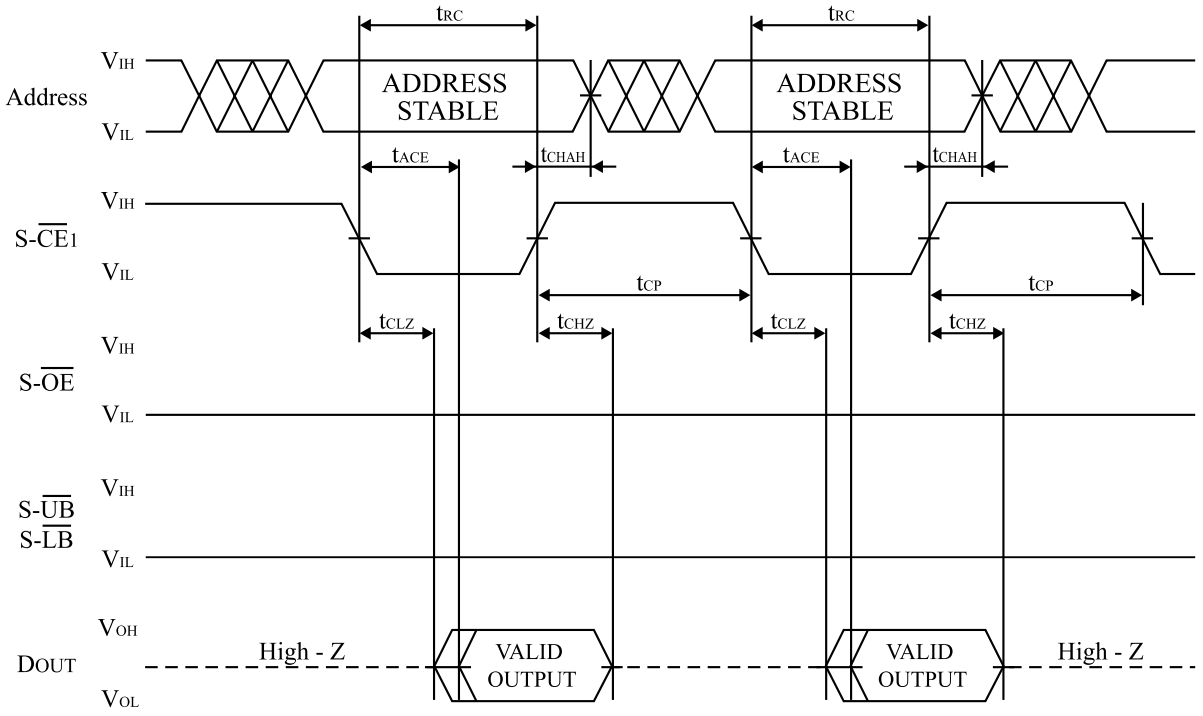

Note:
1. In read cycle, S-CE_2 and S-$\overline{WE}$ should be fixed to high level.

Read Cycle Timing Chart 2 (S-$\overline{OE}$ Controlled)

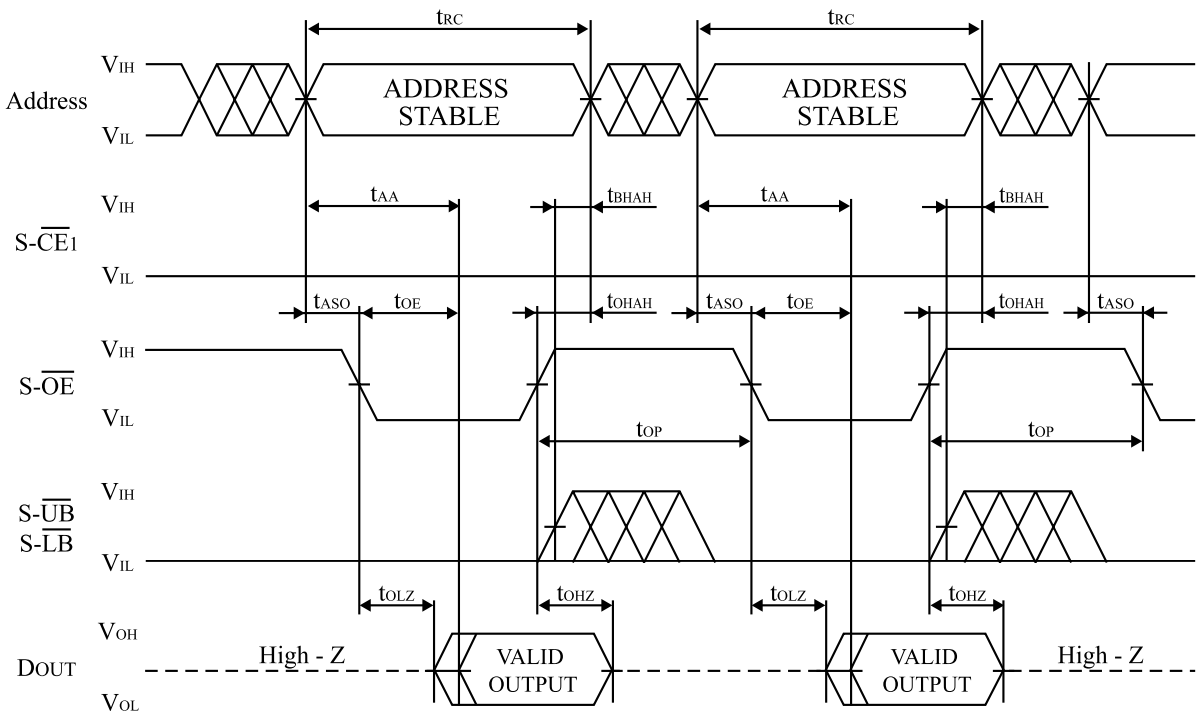

Note:
1. In read cycle, S-CE2 and S-$\overline{WE}$ should be fixed to high level.

Read Cycle Timing Chart 3 (S-$\overline{CE}$1 / S-$\overline{OE}$ Controlled)

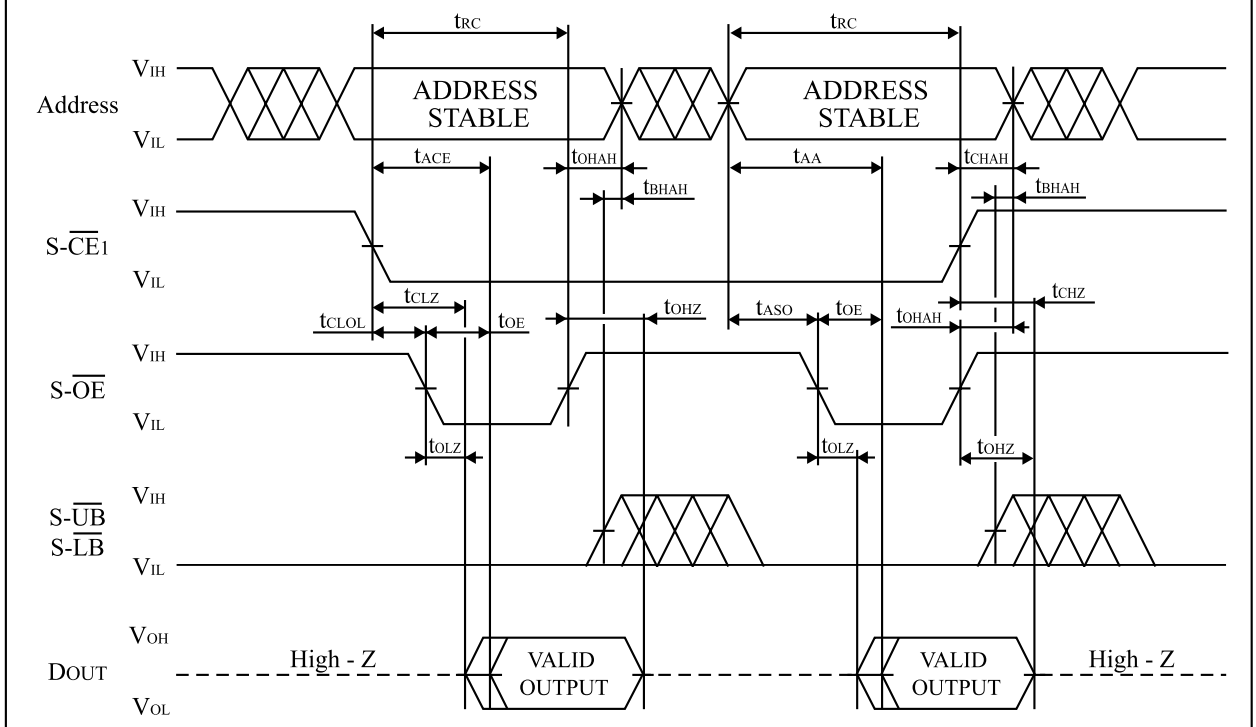

Note:
1. In read cycle, S-CE2 and S-$\overline{WE}$ should be fixed to high level.

Read Cycle Timing Chart 4 (Address Controlled)

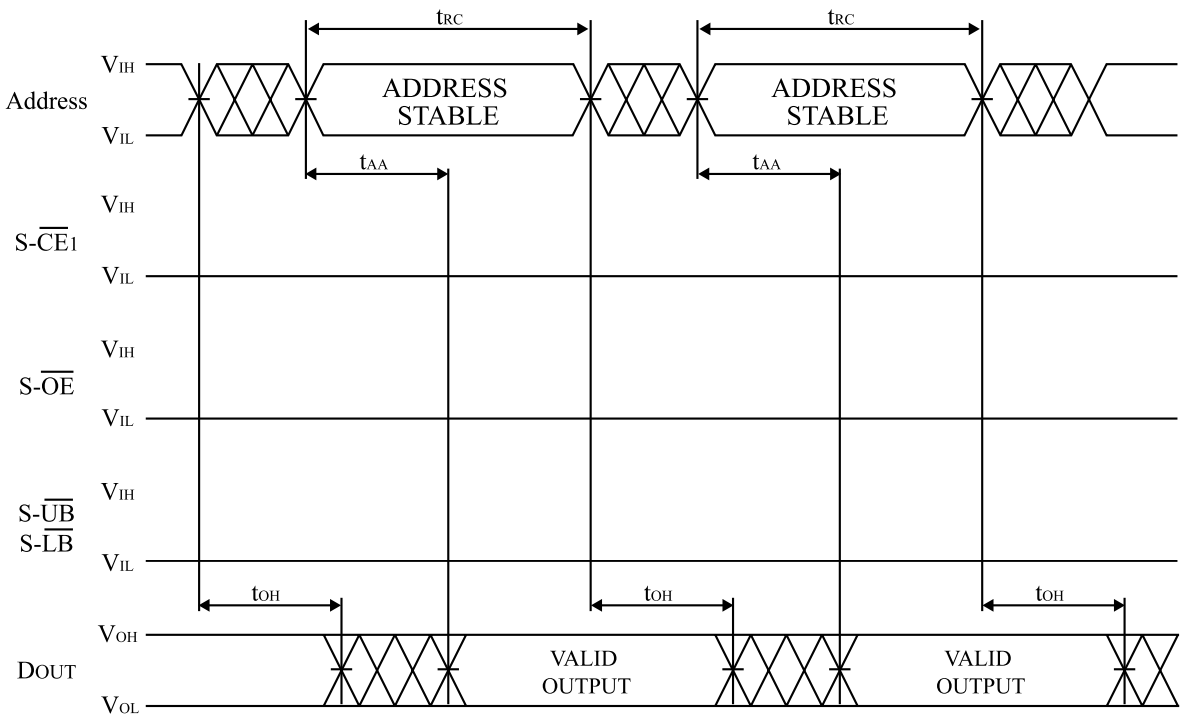

Notes:
1. In read cycle, S-CE2 and S-$\overline{WE}$ should be fixed to high level.
2. When the minimum read cycle time is less than t_{RC}, the address access time (t_{AA}) is not guaranteed.

Read Cycle Timing Chart 5 (S-$\overline{LB}$ / S-$\overline{UB}$ Controlled)

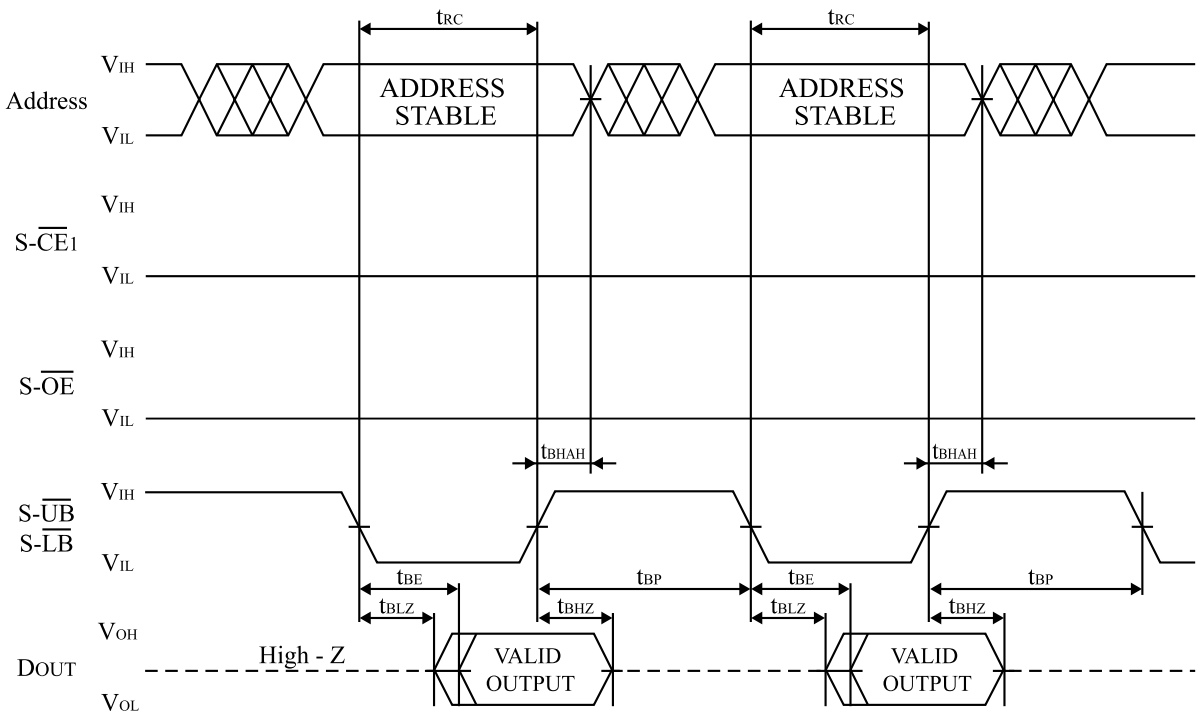

Note:
1. In read cycle, S-CE2 and S-$\overline{WE}$ should be fixed to high level.

Write Cycle Timing Chart 1 (S-$\overline{CE}_1$ Controlled)

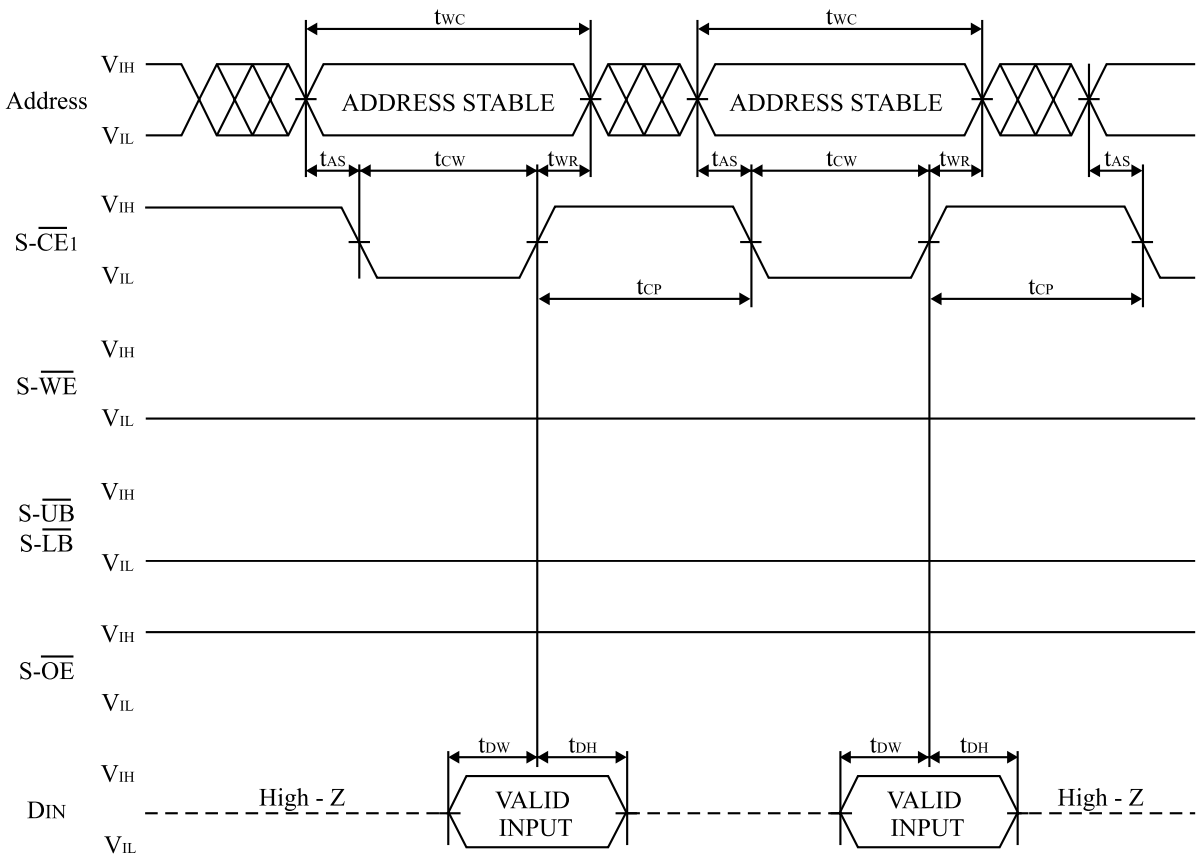

Notes:

1. During address transition, at least one of S-$\overline{CE}_1$, S-$\overline{WE}$ or S-$\overline{LB}$, S-$\overline{UB}$ pins should be inactivated.
2. Do not input data to the DQ pins while they are in the output state.
3. In write cycle, S-CE_2 and S-$\overline{OE}$ should be fixed to high level.
4. Write operation is done during the overlap time of a low level S-$\overline{CE}_1$, S-$\overline{WE}$, S-$\overline{LB}$ and/or S-$\overline{UB}$.

Write Cycle Timing Chart 2 (S-$\overline{WE}$ Controlled)

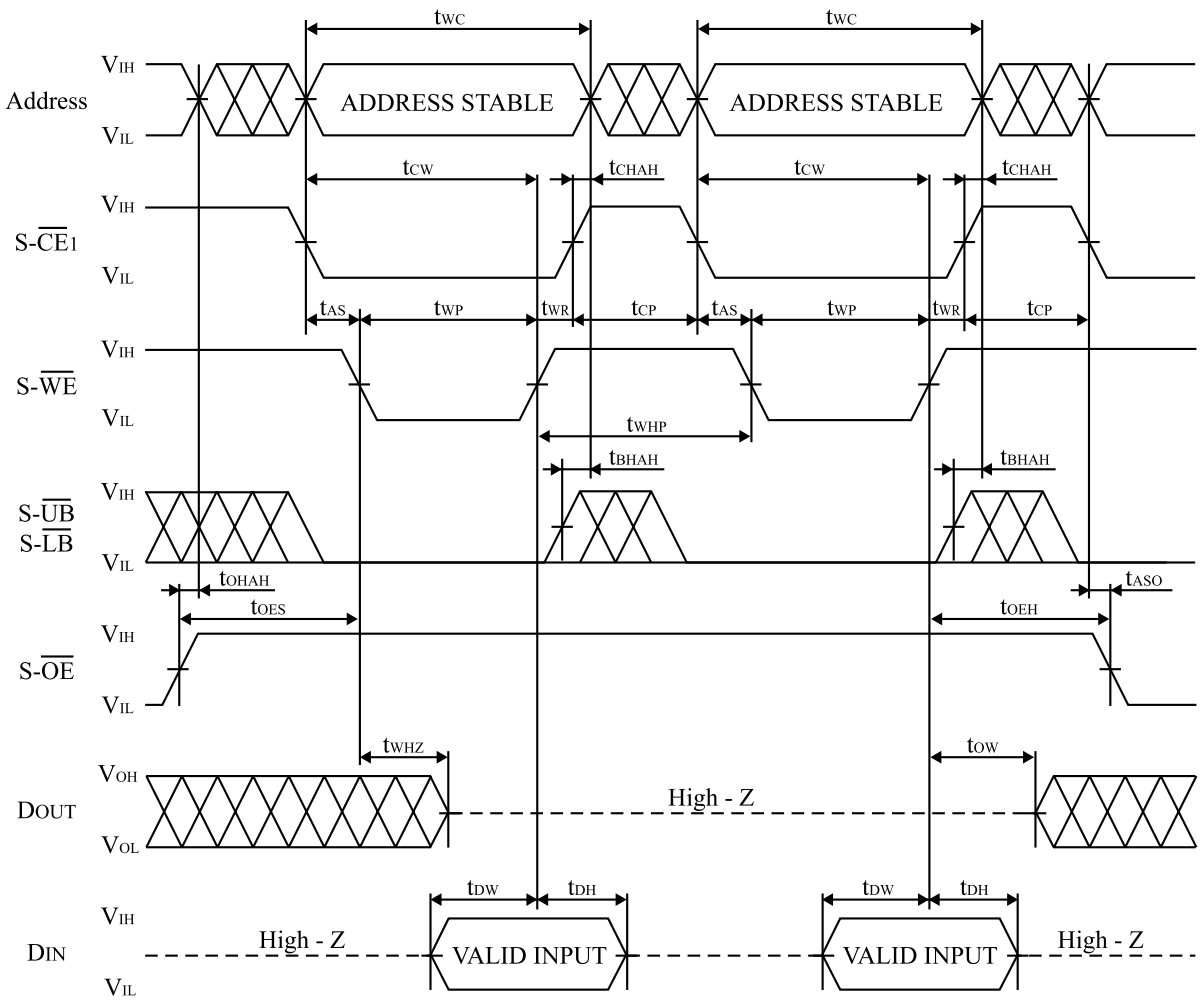

Notes:

1. During address transition, at least one of S-$\overline{CE}$1, S-$\overline{WE}$ or S-$\overline{LB}$, S-$\overline{UB}$ pins should be inactivated.
2. Do not input data to the DQ pins while they are in the output state.
3. In write cycle, S-CE2 and S-$\overline{OE}$ should be fixed to high level.
4. Write operation is done during the overlap time of a low level S-$\overline{CE}$1, S-$\overline{WE}$, S-$\overline{LB}$ and/or S-$\overline{UB}$.

Write Cycle Timing Chart 3 (S-$\overline{WE}$ Controlled)

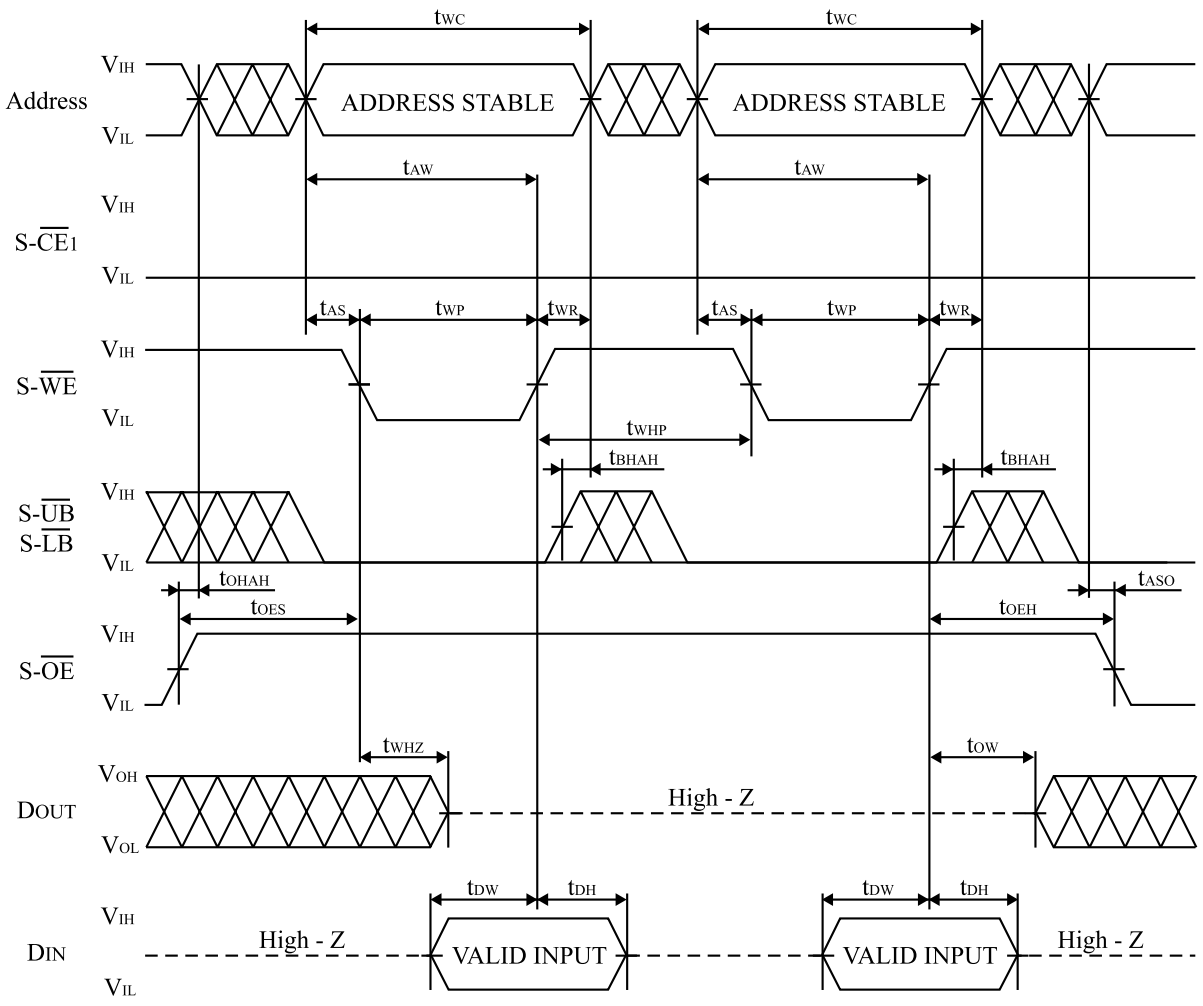

Notes:

1. During address transition, at least one of S-$\overline{CE}$1, S-$\overline{WE}$ or S-$\overline{LB}$, S-$\overline{UB}$ pins should be inactivated.
2. Do not input data to the DQ pins while they are in the output state.
3. In write cycle, S-CE2 and S-$\overline{OE}$ should be fixed to high level.
4. Write operation is done during the overlap time of a low level S-$\overline{CE}$1, S-$\overline{WE}$, S-$\overline{LB}$ and/or S-$\overline{UB}$.

Write Cycle Timing Chart 4 (S-$\overline{LB}$ / S-$\overline{UB}$ Controlled)

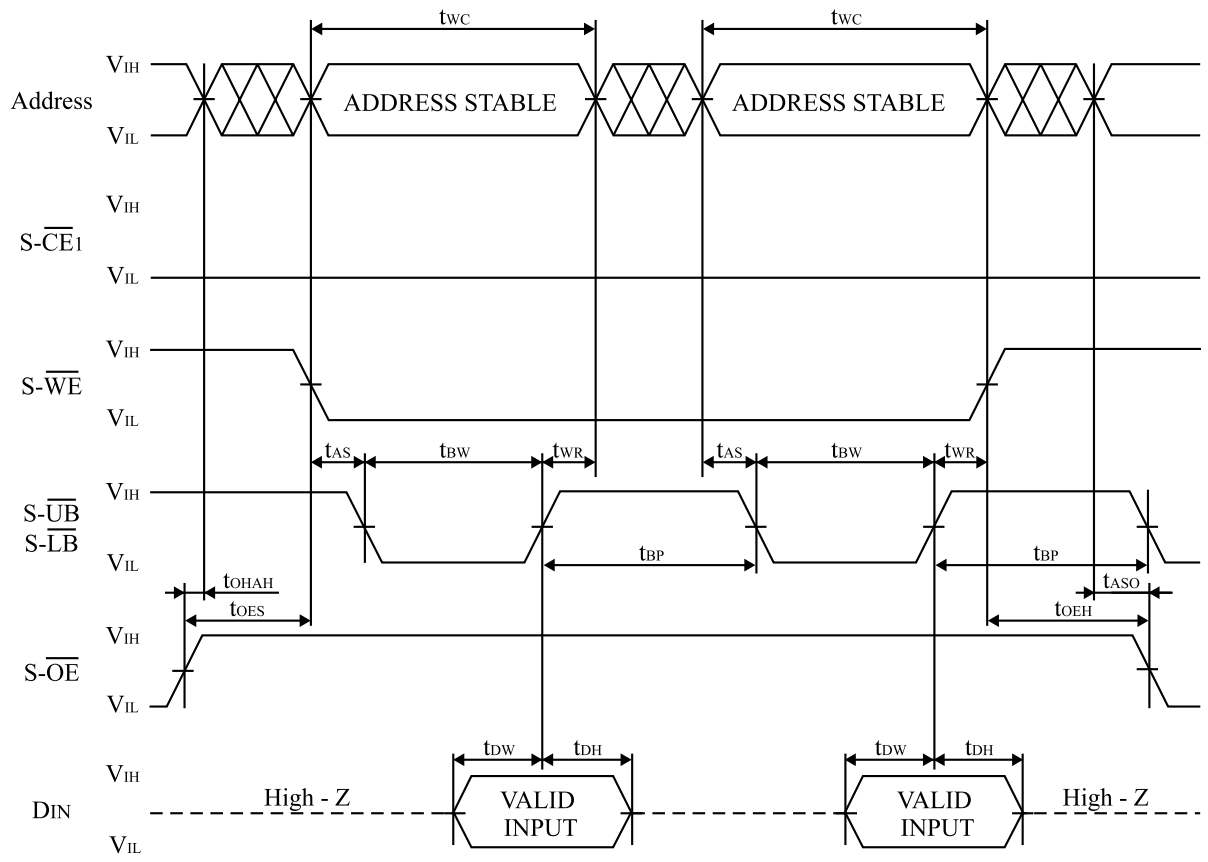

Notes:

1. During address transition, at least one of S-$\overline{CE}_1$, S-$\overline{WE}$ or S-$\overline{LB}$, S-$\overline{UB}$ pins should be inactivated.
2. Do not input data to the DQ pins while they are in the output state.
3. In write cycle, S-CE_2 and S-$\overline{OE}$ should be fixed to high level.
4. Write operation is done during the overlap time of a low level S-$\overline{CE}_1$, S-$\overline{WE}$, S-$\overline{LB}$ and/or S-$\overline{UB}$.

Write Cycle Timing Chart 5 (S-$\overline{LB}$ / S-$\overline{UB}$ Independent Controlled)

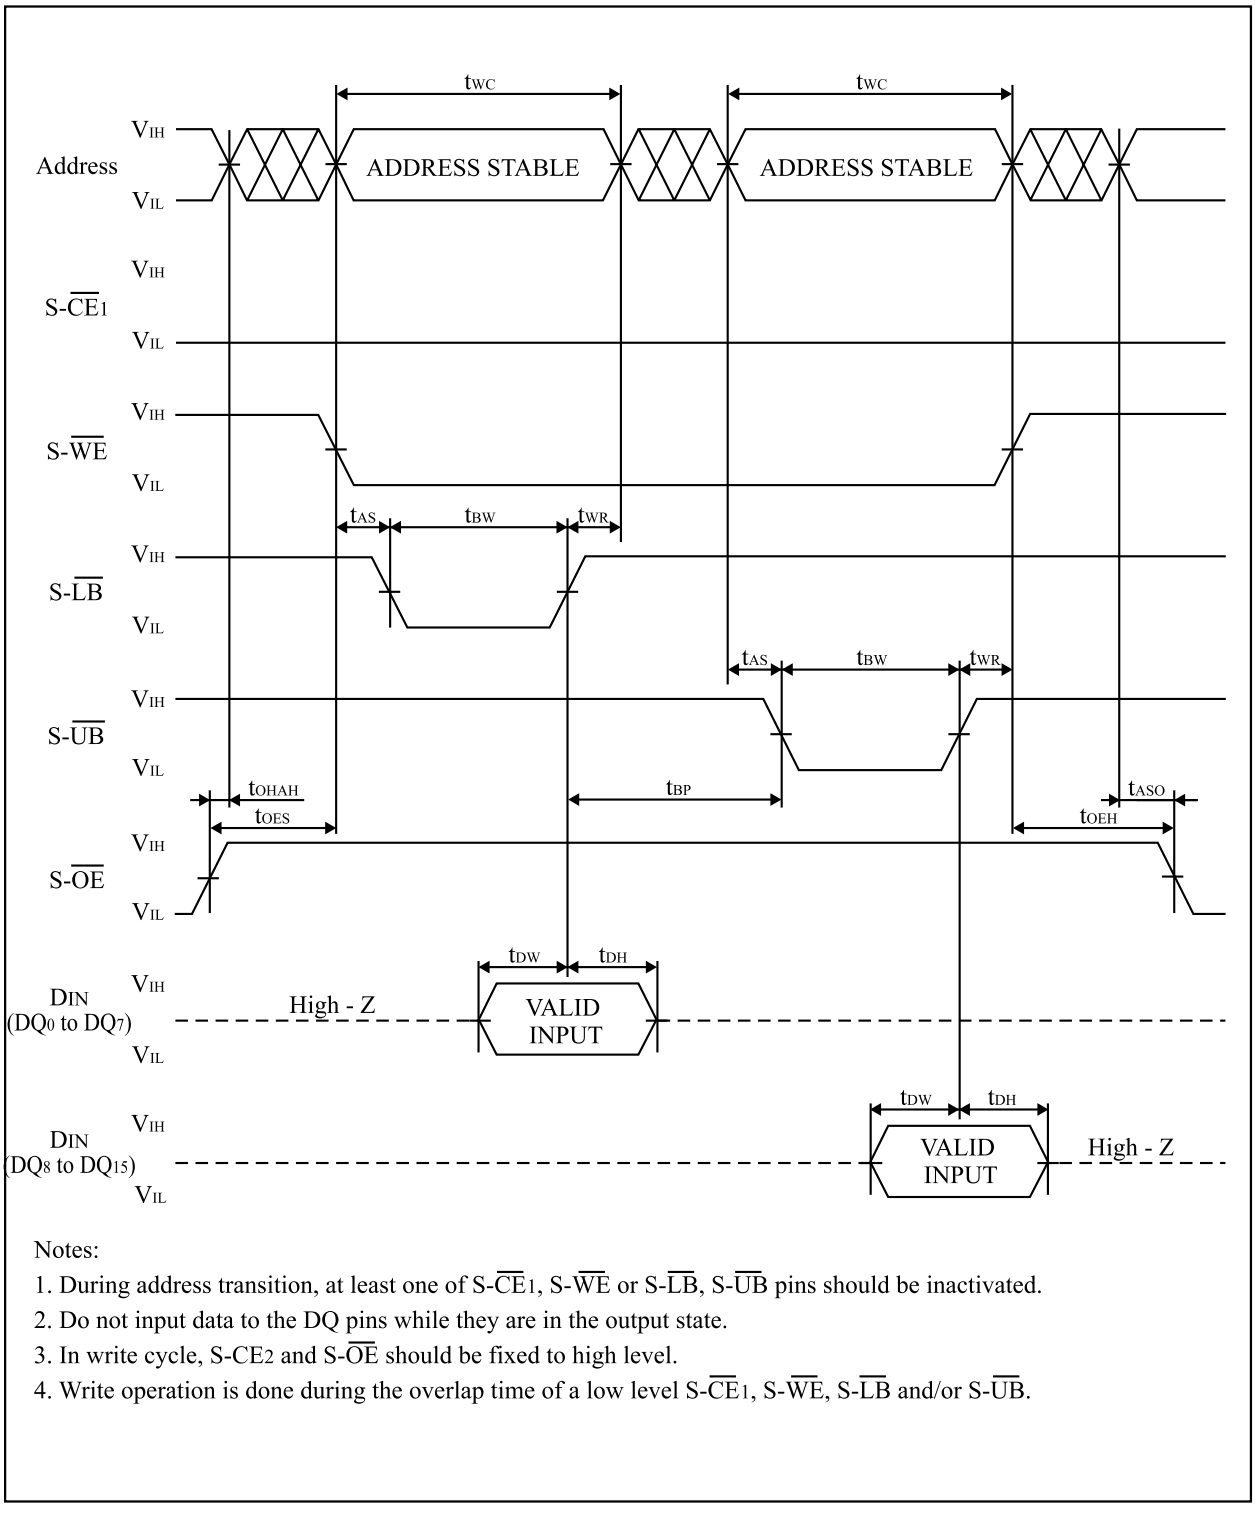

Notes:

1. During address transition, at least one of S-$\overline{CE}_1$, S-$\overline{WE}$ or S-$\overline{LB}$, S-$\overline{UB}$ pins should be inactivated.
2. Do not input data to the DQ pins while they are in the output state.
3. In write cycle, S-CE2 and S-$\overline{OE}$ should be fixed to high level.
4. Write operation is done during the overlap time of a low level S-$\overline{CE}_1$, S-$\overline{WE}$, S-$\overline{LB}$ and/or S-$\overline{UB}$.

Mode Register Setting Timing Chart

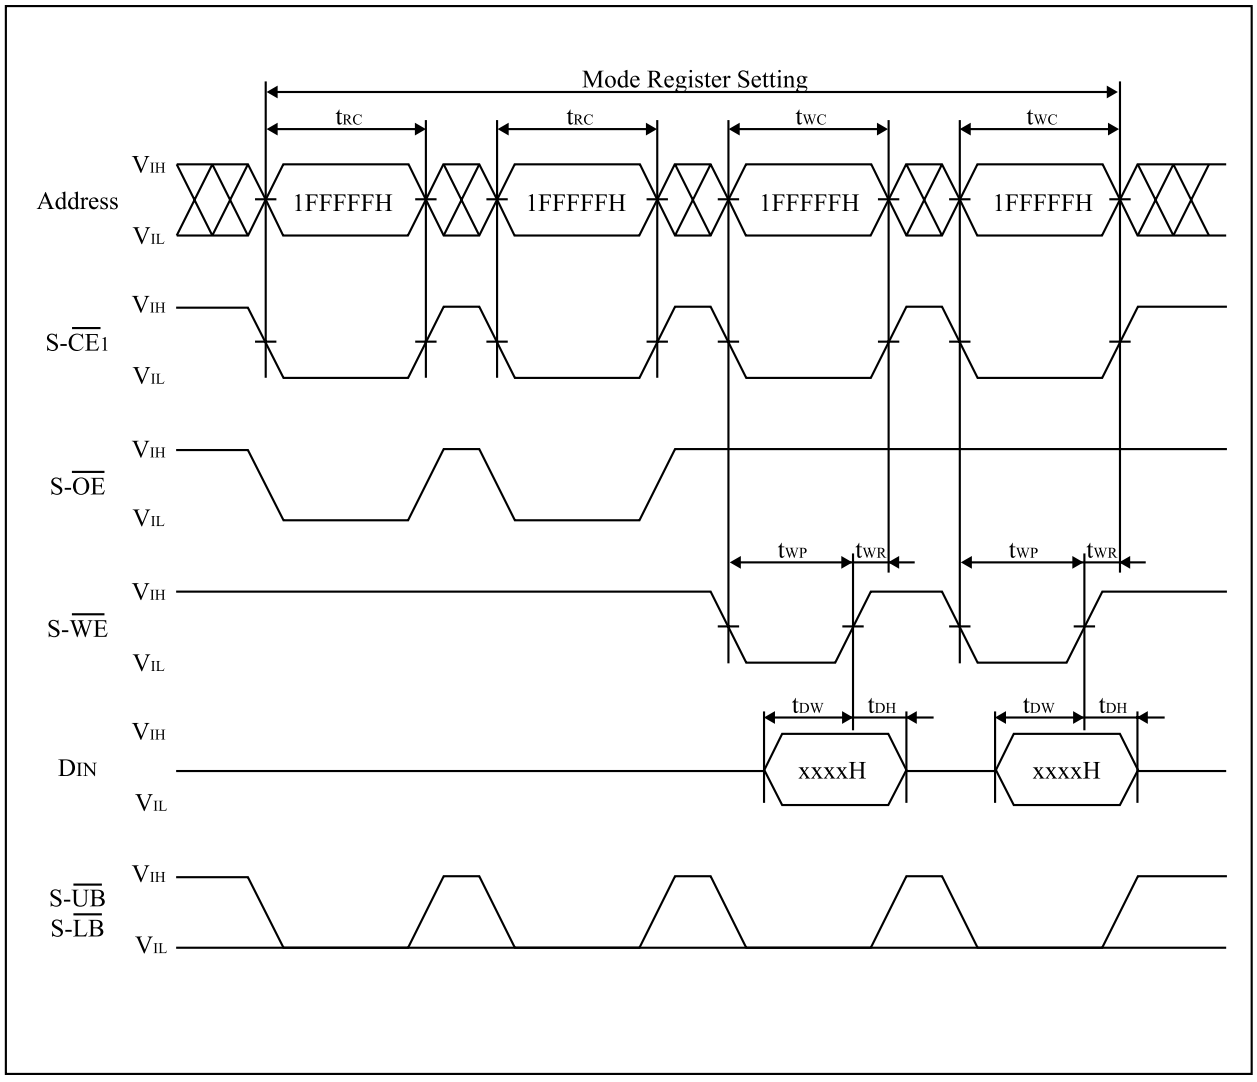

Mode Register Setting Flow Chart

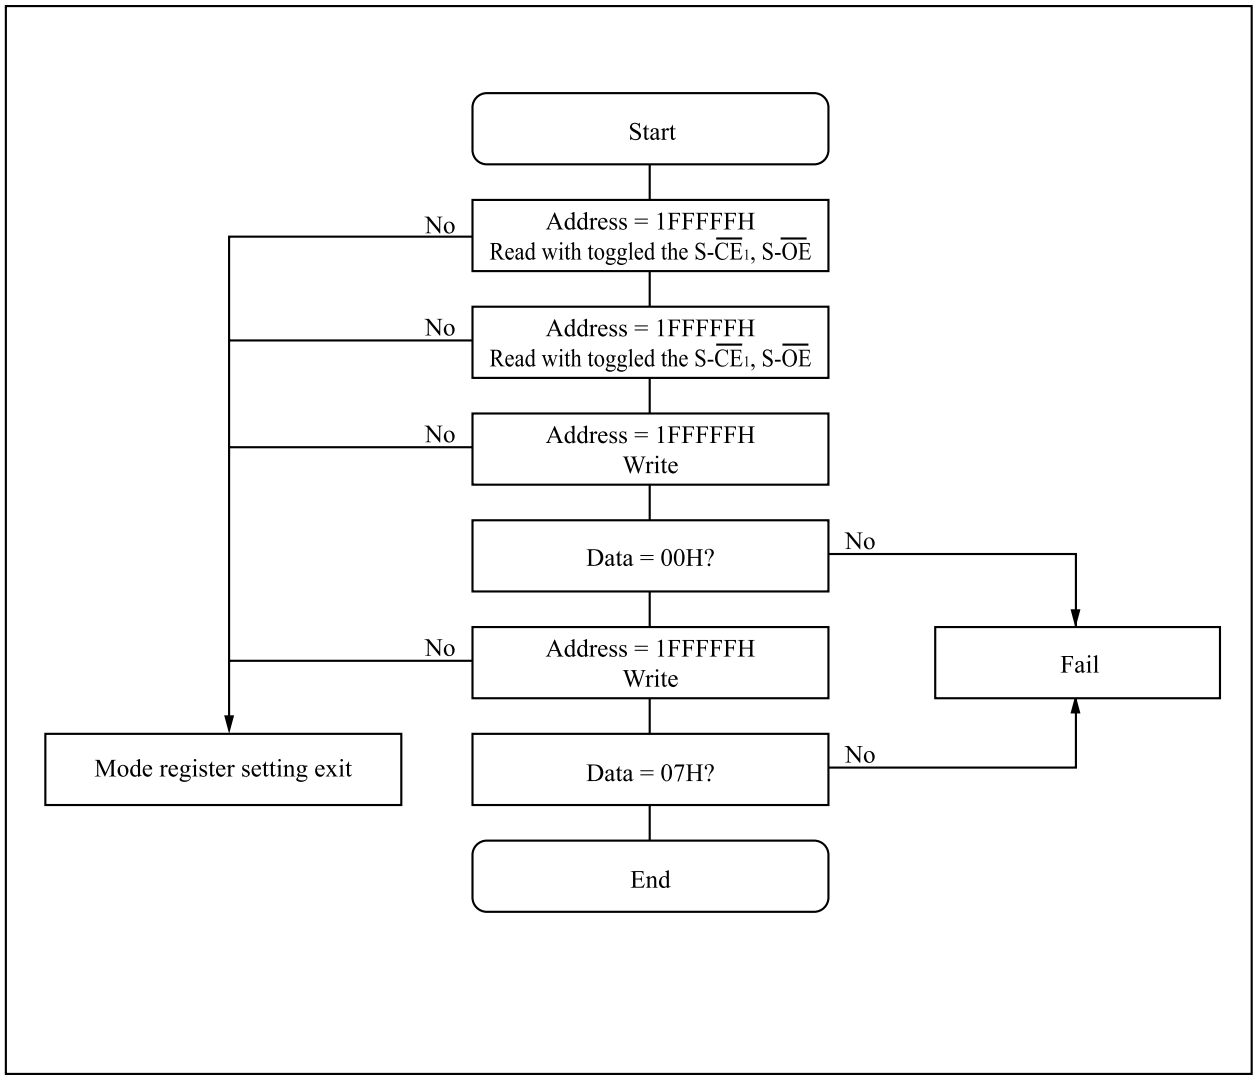

Sleep Mode Entry / Exit Timing Chart

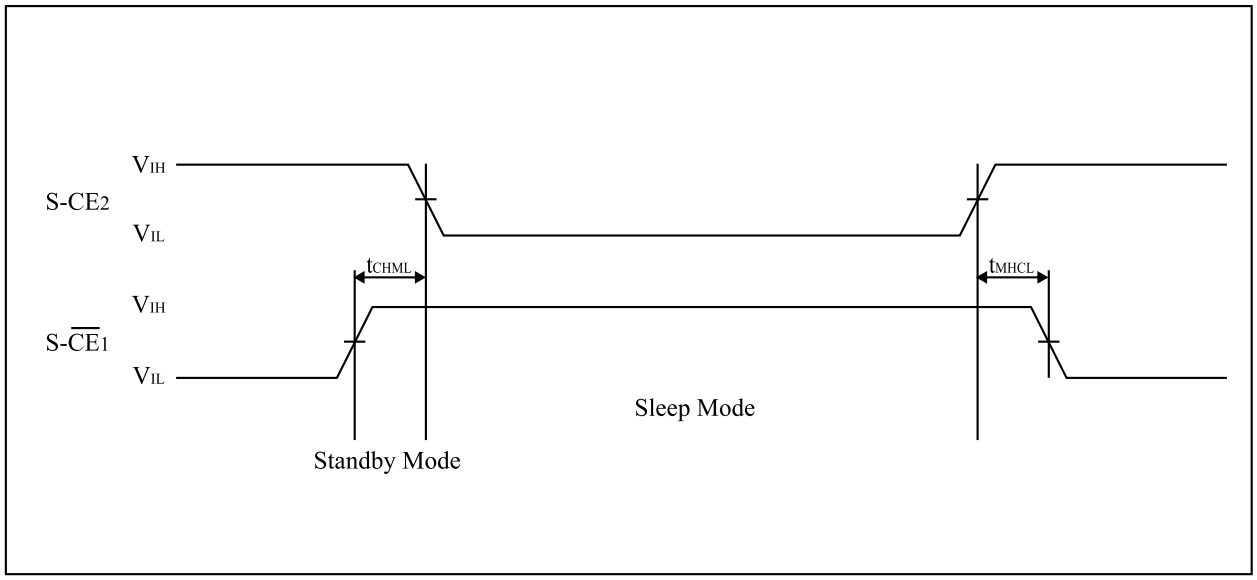

14. Notes

This product is a stacked CSP package that a 64M (x16) bit Flash Memory, a 64M (x16) bit Flash Memory and a 32M (x16) bit Smartcombo RAM are assembled into.

- Supply Power

  Maximum difference (between F-V_{CC} and S-V_{CC}) of the voltage is less than 0.3V.

- Power Supply and Chip Enable of Flash Memory and Smartcombo RAM

  Two or more chips among Flash memory (F_1, F_2) and Smartcombo RAM should not be active simultaneously.

  If the two memories are active together, possibly they may not operate normally by interference noises or data collision on DQ bus.

  Both F-V_{CC} and S-V_{CC} are needed to be applied by the recommended supply voltage at the same time except Smartcombo RAM standby mode.

- Power Up Sequence

  When turning on Flash memory power supply, keep F-$\overline{RST}$ low. After F-V_{CC} reaches over 2.7V, keep F-$\overline{RST}$ low for more than 100 nsec.

- Device Decoupling

  This is a 3 chips stacked CSP package. When one of the chips is active, others are in standby mode. Therefor, these power supplies should be designed very carefully. A careful decoupling of power supplies is necessary between Smartcombo RAM and Flash Memory. Note peak current caused by transition of control signals ($F_{1,2}$-$\overline{CE}$, S-$\overline{CE}_1$, S-CE_2).

15. Flash Memory Data Protection

Noises having a level exceeding the limit specified in the specification may be generated under specific operating conditions on some systems. Such noises, when induced onto F-$\overline{WE}$ signal or power supply, may be interpreted as false commands and causes undesired memory updating. To protect the data stored in the flash memory against unwanted writing, systems operating with the flash memory should have the following write protect designs, as appropriate:

■ The below describes data protection method.

1. Protection of data in each block
   - Any locked block by setting its block lock bit is protected against the data alternation. When F-$\overline{WP}$ is low, any locked-down block by setting its block lock-down bit is protected from lock status changes.
     By using this function, areas can be defined, for example, program area (locked blocks), and data area (unlocked blocks).
   - For detailed block locking scheme, see Chapter 5.Command Definitions for Flash Memory.

2. Protection of data with F-V_{PP} control
   - When the level of F-V_{PP} is lower than V_{PPLK} (F-V_{PP} lockout voltage), write functions to all blocks are disabled. All blocks are locked and the data in the blocks are completely protected.

3. Protection of data with F-$\overline{RST}$
   - Especially during power transitions such as power-up and power-down, the flash memory enters reset mode by bringing F-$\overline{RST}$ to low, which inhibits write operation to all blocks.
   - For detailed description on F-$\overline{RST}$ control, see Chapter 12.6 AC Electrical Characteristics for Flash Memory, Reset Operations.

■ Protection against noises on F-$\overline{WE}$ signal

To prevent the recognition of false commands as write commands, system designer should consider the method for reducing noises on F-$\overline{WE}$ signal.

16. Design Considerations

1. Power Supply Decoupling

To avoid a bad effect to the system by flash memory and Smartcombo RAM power switching characteristics, each device should have a 0.1µF ceramic capacitor connected between F-V_{CC} and GND, between F-V_{PP} and GND and between S-V_{CC} and GND.
Low inductance capacitors should be placed as close as possible to package leads.

2. F-V_{PP} Trace on Printed Circuit Boards

Updating the memory contents of flash memories that reside in the target system requires that the printed circuit board designer pay attention to the F-V_{PP} Power Supply trace. Use similar trace widths and layout considerations given to the F-V_{CC} power bus.

3. The Inhibition of Overwrite Operation

Please do not execute reprograming “0” for the bit which has already been programed “0”. Overwrite operation may generate unerasable bit.

In case of reprograming “0” to the data which has been programed “1”.
- Program “0” for the bit in which you want to change data from “1” to “0”.
- Program “1” for the bit which has already been programed “0”.

For example, changing data from “1011110110111101” to “1010110110111100”
requires “1110111111111110” programing.

4. Power Supply

Block erase, full chip erase, (page buffer) program with an invalid F-V_{PP} (See Chapter 11. DC Electrical Characteristics) produce spurious results and should not be attempted.
Device operations at invalid F-V_{CC} voltage (See Chapter 11. DC Electrical Characteristics) produce spurious results and should not be attempted.

17. Related Document Information(1)

Document No.	Document Name
FUM00701	LH28F320BF, LH28F640BF, LH28F128BF Series Appendix

Note:
1. International customers should contact their local SHARP or distribution sales offices.

18 Package and packing specification

1.Storage Conditions.

1-1.Storage conditions required before opening the dry packing.

- Normal temperature : 5～40℃
- Normal humidity : 80% R.H. max.

1-2.Storage conditions required after opening the dry packing.

In order to prevent moisture absorption after opening, ensure the following storage conditions apply:

(1) Storage conditions for one-time soldering. (Convection reflow*1, IR/Convection reflow.*1)

- Temperature : 5～25℃
- Humidity : 60% R.H. max.
- Period : 96 hours max. after opening.

(2) Storage conditions for two-time soldering. (Convection reflow*1, IR/Convection reflow.*1)

a. Storage conditions following opening and prior to performing the 1st reflow.

- Temperature : 5～25℃
- Humidity : 60% R.H. max.
- Period : 96 hours max. after opening.

b. Storage conditions following completion of the 1st reflow and prior to performing the 2nd reflow.

- Temperature : 5～25℃
- Humidity : 60% R.H. max.
- Period : 96 hours max. after completion of the 1st reflow.

*1:Air or nitrogen environment.

1-3.Temporary storage after opening.

To re-store the devices before soldering, do so only once and use a dry box or place desiccant (with a blue humidity indicator) with the devices and perform dry packing again using heat-sealing.

The storage period, temperature and humidity must be as follows :

(1) Storage temperature and humidity.

※1 : External atmosphere temperature and humidity of the dry packing.

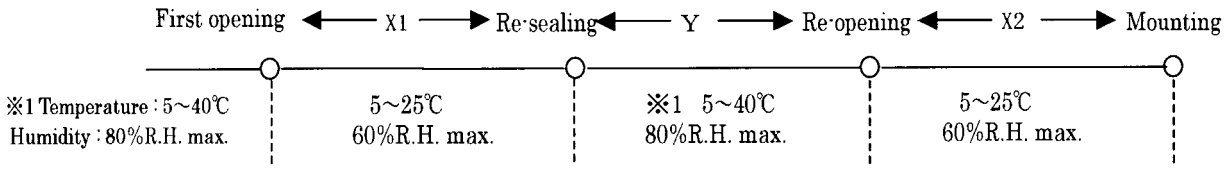

(2) Storage period.

- X1+X2 : Refer to Section 1-2(1) and (2)a , depending on the mounting method.
- Y : Two weeks max.

2. Baking Condition.

(1) Situations requiring baking before mounting.

- Storage conditions exceed the limits specified in Section 1-2 or 1-3.
- Humidity indicator in the desiccant was already red (pink) when opened.
  (Also for re-opening.)

(2) Recommended baking conditions.

- Baking temperature and period :
  120+10/-0℃ for 1~3 hours.
- The above baking conditions apply since the trays are heat-resistant.

(3) Storage after baking.

- After baking, store the devices in the environment specified in Section 1-2 and mount immediately.

3.Surface mount conditions.

The following soldering condition are recommended to ensure device quality.

3-1.Soldering.

(1) Convection reflow or IR/Convection. (one-time soldering or two-time soldering in air or nitrogen environment)

- Temperature and period :
  Peak temperature of 240℃ max., above 230℃ for 15 sec. max.
  Above 200℃ for 30~50 sec.
  Preheat temperature of 140~160℃ for 90±30 sec.
  Temperature increase rate of 1~3℃/sec.
- Measuring point : IC package surface.
- Temperature profile :

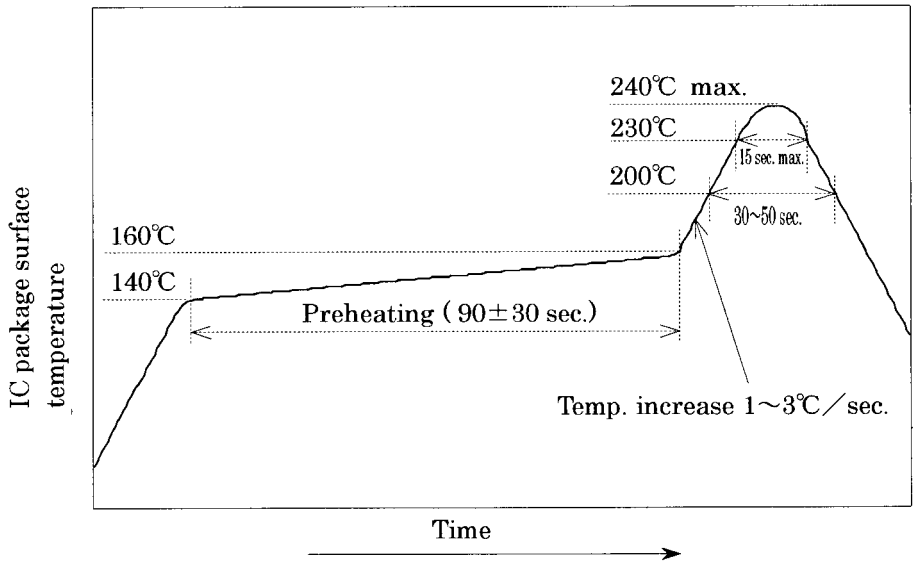

4. Condition for removal of residual flax.

(1) Ultrasonic washing power : 25 watts / liter max.
(2) Washing time : Total 1 minute max.
(3) Solvent temperature : 15~40℃

5. Package outline specification.
Refer to the attached drawing.

6. Markings.

6-1.Marking details. (The information on the package should be given as follows.)

(1) Product name : LRS1828

(2) Company name : S

(3) Date code

(Example) YY WW XXX



6-2.Marking layout.

The layout is shown in the attached drawing.
(However, this layout does not specify the size of the marking character and marking position.)

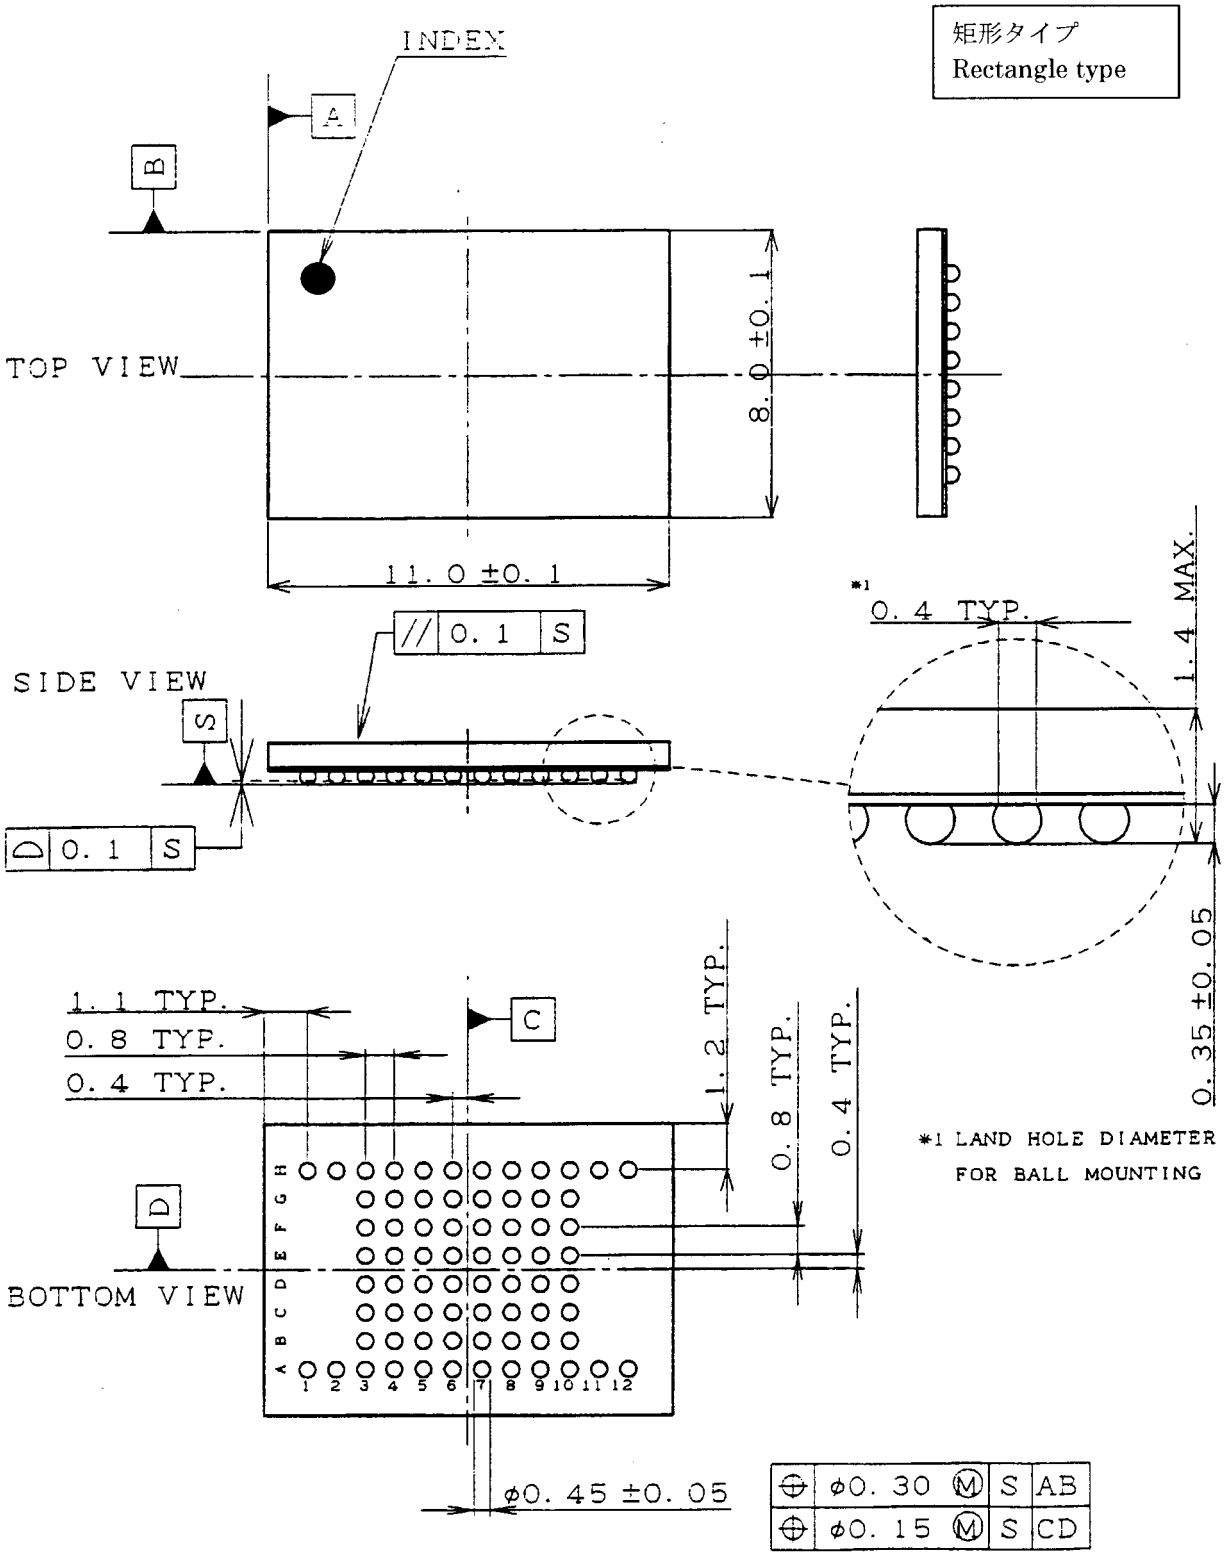

名称 NAME	LFBGA072/064-P-0811 (LCSP072/064-P-0811)		備考 NOTE
DRAWING NO.	AA2149	単位 UNIT	mm

20020912

マークイメージ図
Marking image

矩形タイプ
Rectangle type

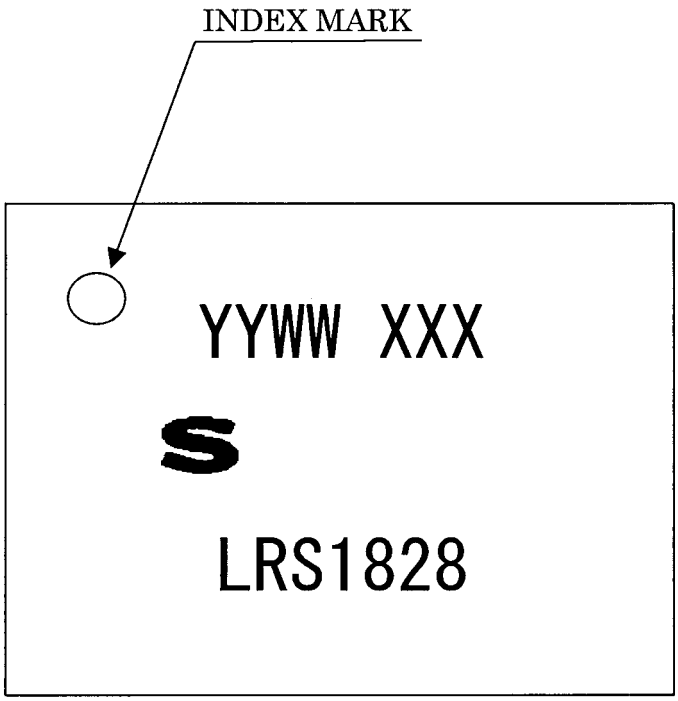

7.Packing Specifications (Dry packing for surface mount packages.)

7-1.Packing materials.

Material name	Material specifications	Purpose
Inner carton	Cardboard (2310 devices / inner carton max.)	Packing the devices. (10 trays / inner carton)
Tray	Conductive plastic (231 devices / tray)	Securing the devices.
Upper cover tray	Conductive plastic (1 tray / inner carton)	Securing the devices.
Laminated aluminum bag	Aluminum polyethylene	Keeping the devices dry.
Desiccant	Silica gel	Keeping the devices dry.
Label	Paper	Indicates part number, quantity, and packed date.
PP band	Polypropylene (3 pcs. / inner carton)	Securing the devices.
Outer carton	Cardboard (9240 devices / outer carton max.)	Outer packing.

(Devices must be placed on the tray in the same direction.)

7-2.Outline dimension of tray.

Refer to the attached drawing.

7-3.Outline dimension of carton.

Refer to the attached drawing.

8. Precautions for use.

(1) Opening must be done on an anti-ESD treated workbench.
All workers must also have undergone anti-ESD treatment.

(2) The trays have undergone either conductive or anti-ESD treatment.
If another tray is used, make sure it has also undergone conductive or anti-ESD treatment.

(3) The devices should be mounted the devices within one year of the date of delivery.

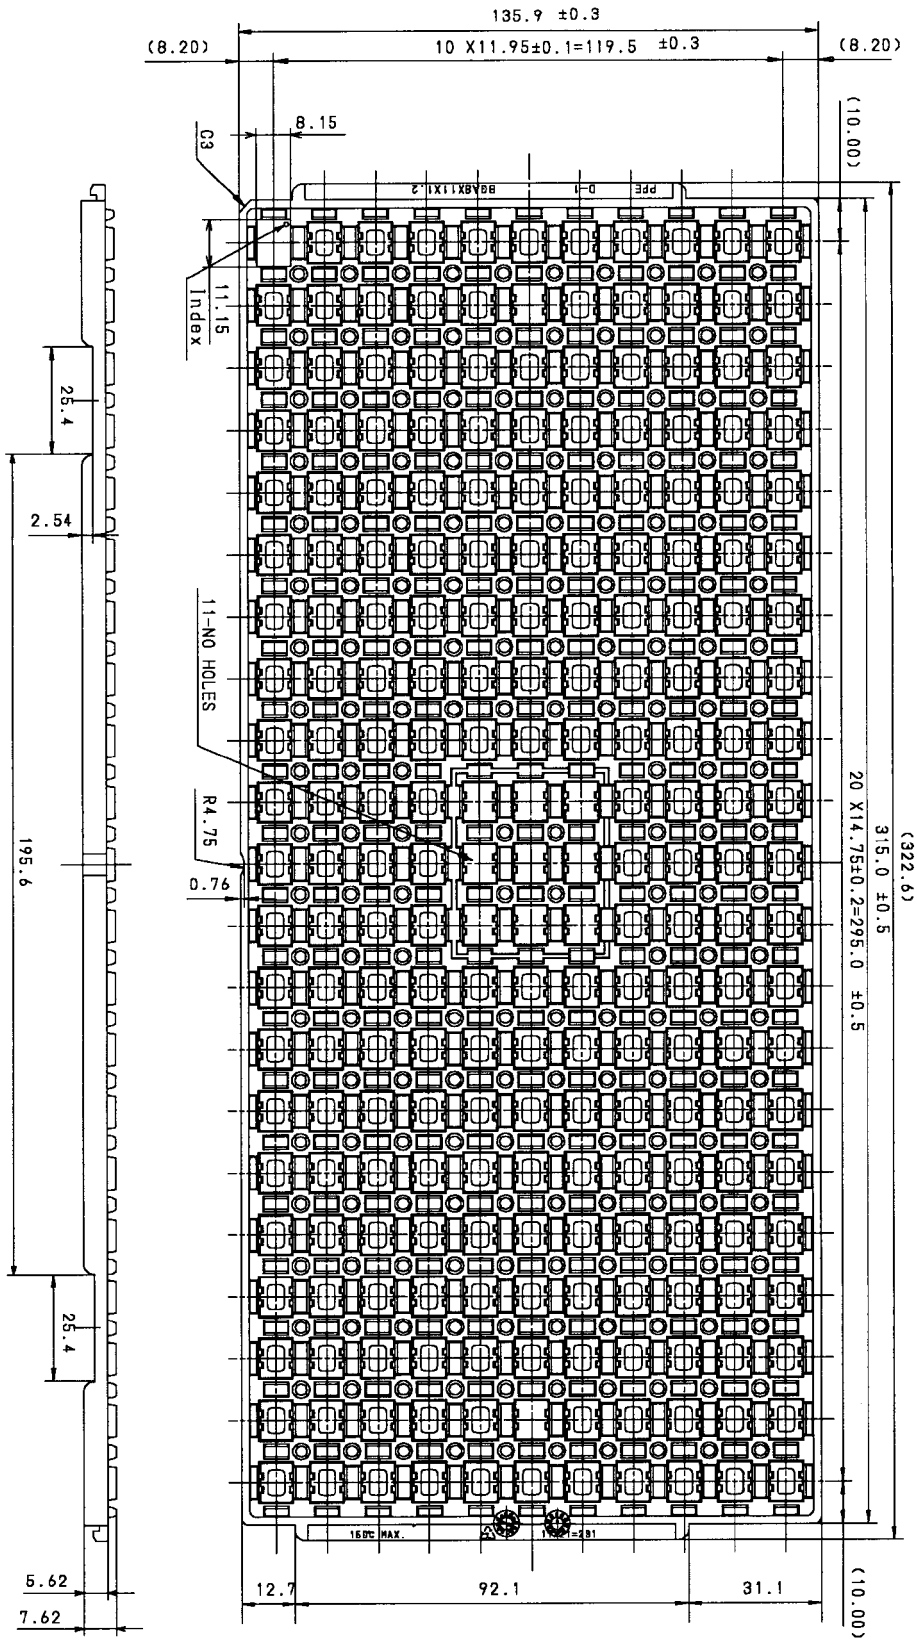

名称 NAME	BGA8X11X1.2	備考 NOTE
DRAWING NO. CV867	単位 UNIT mm	

20020912

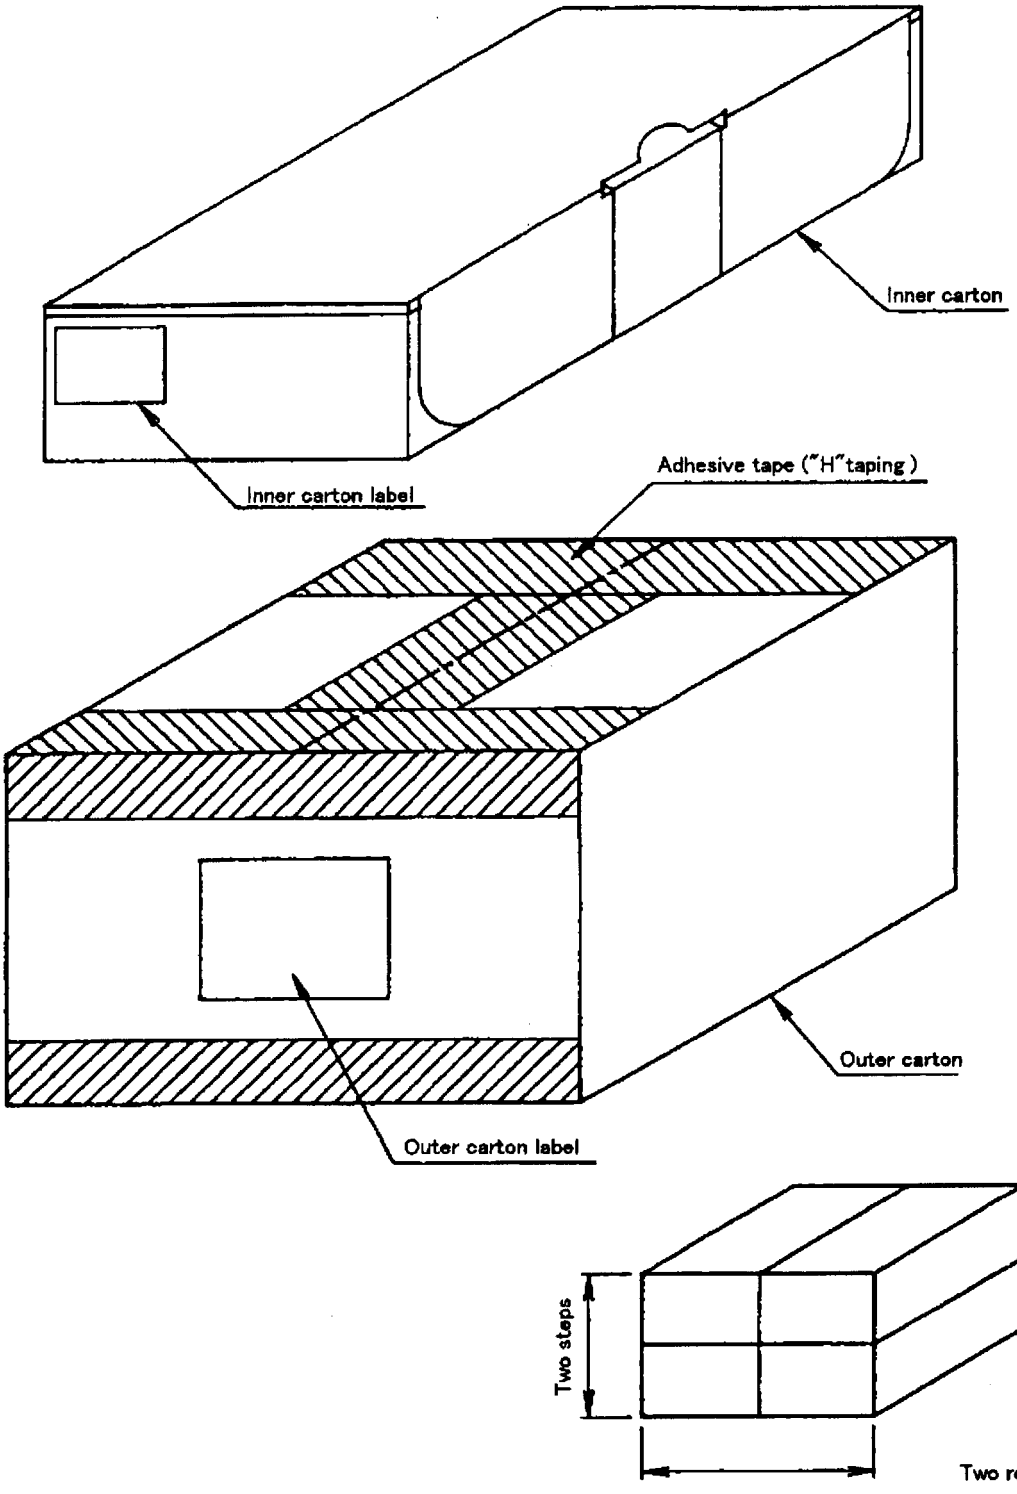

L × W× H

Inner carton - Outer dimensions : 348×152×90

Outer carton - Outer dimensions : 350×335×215

名称 NAME	トレイ品 包装仕様 Packing specifications		
DRAWING NO.	BJ433J	単位 UNIT	mm

備考 出荷数量が端数の場合、本仕様と異なることがあります。

NOTE There is a possibility different from this specification when the number of shipments is fractions.

20020912

Inner carton label

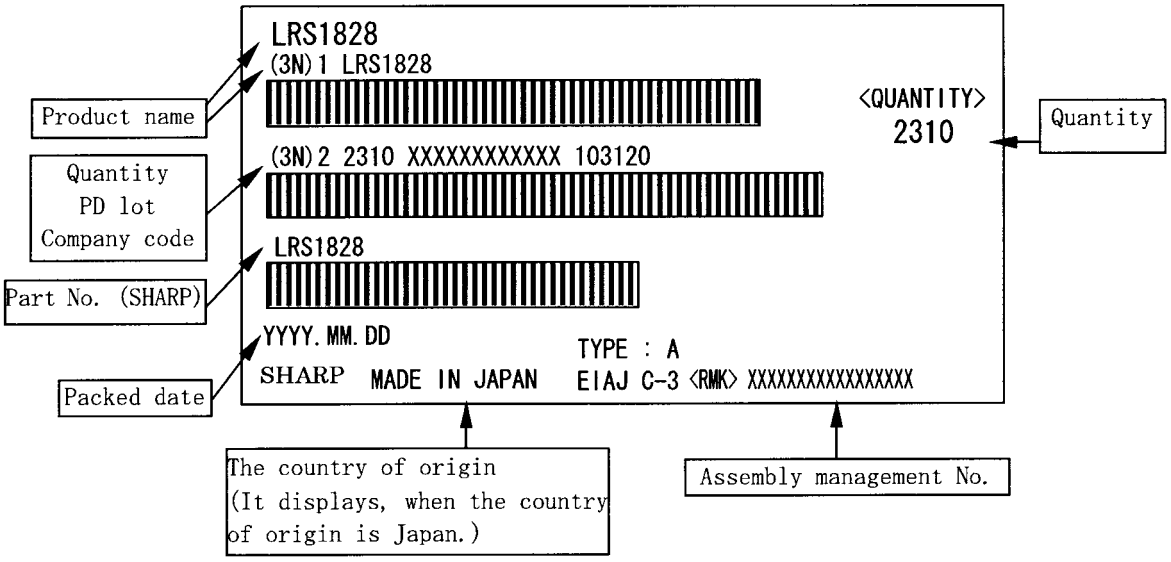

Outer carton label

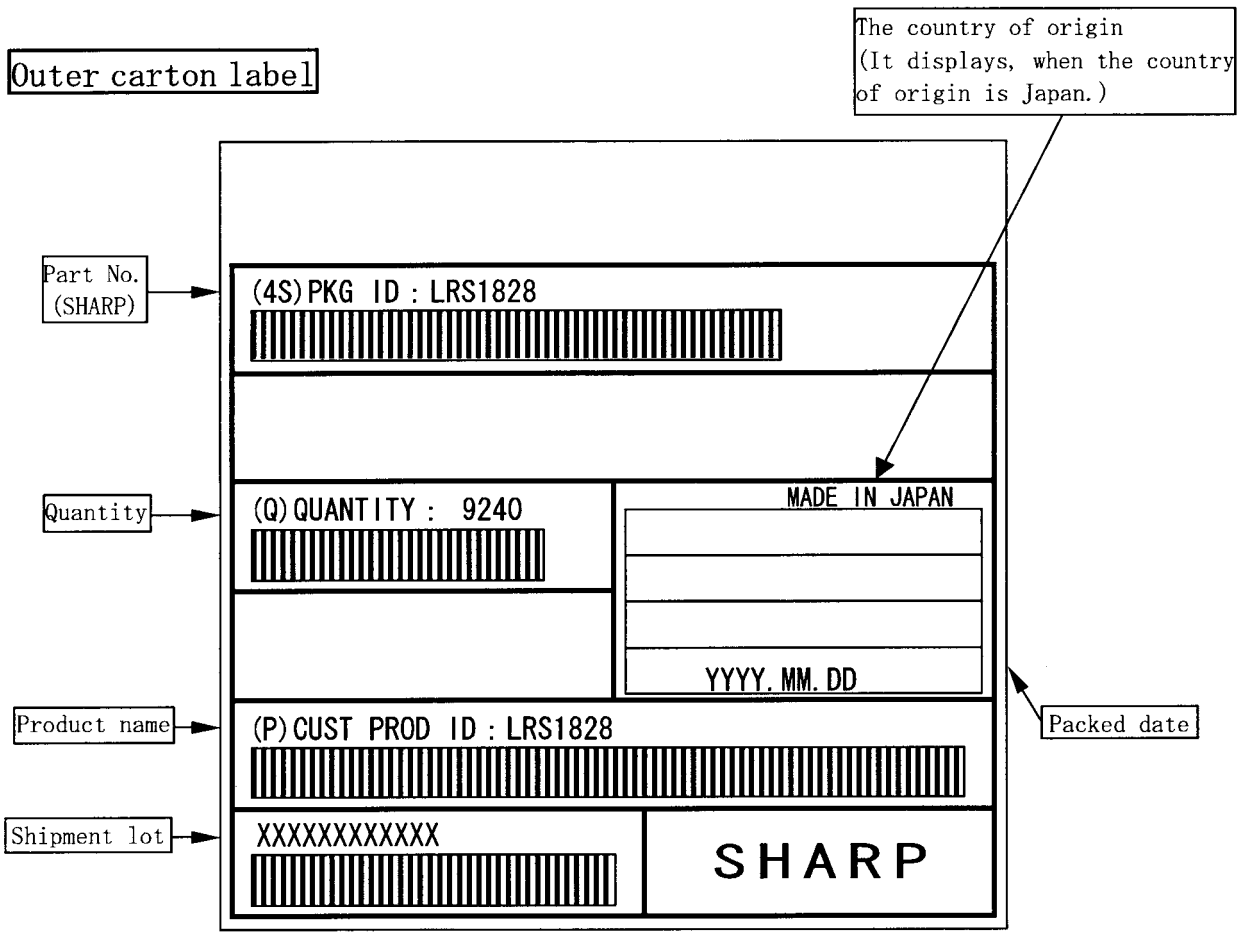

(Former) EIAJ B Standard conforming

20020912

イメージ図 (Image)

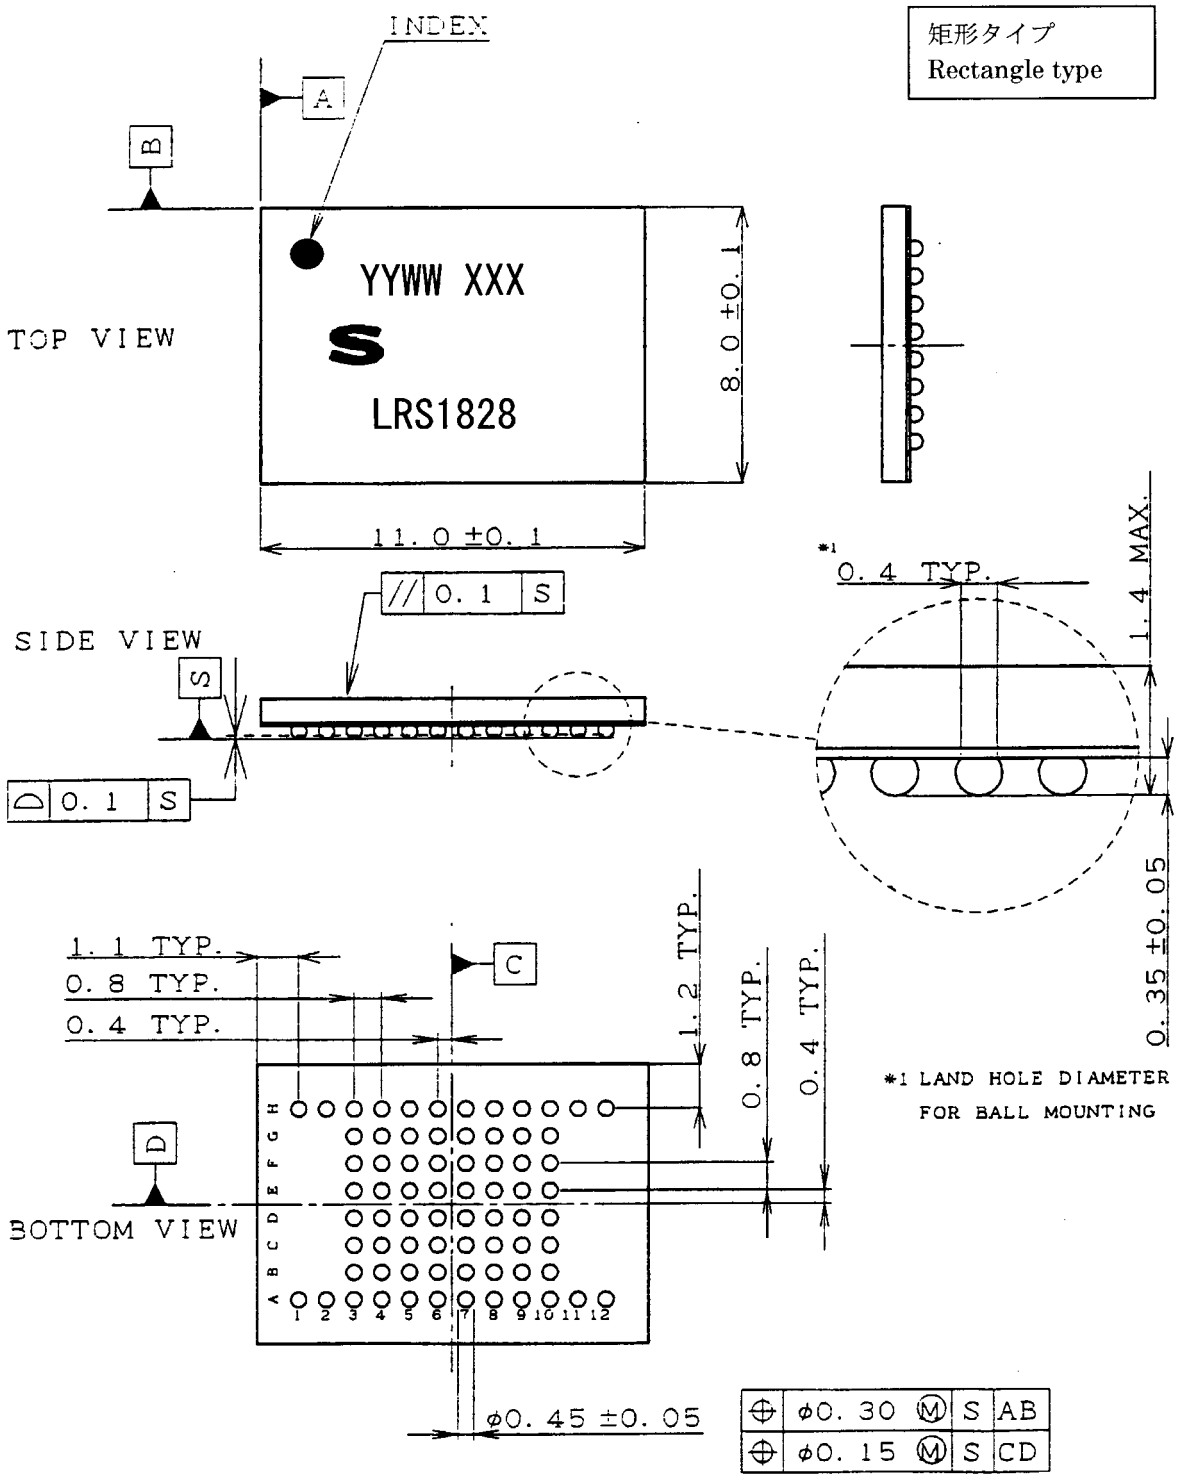

名称 NAME	LFBGA072/064-P-0811 (LCSP072/064-P-0811)		備考 NOTE
DRAWING NO.	AA2149	単位 UNIT	mm

20020912

A-1 RECOMMENDED OPERATING CONDITIONS

A-1.1 At Device Power-Up

AC timing illustrated in Figure A-1 is recommended for the supply voltages and the control signals at device power-up. If the timing in the figure is ignored, the device may not operate correctly.

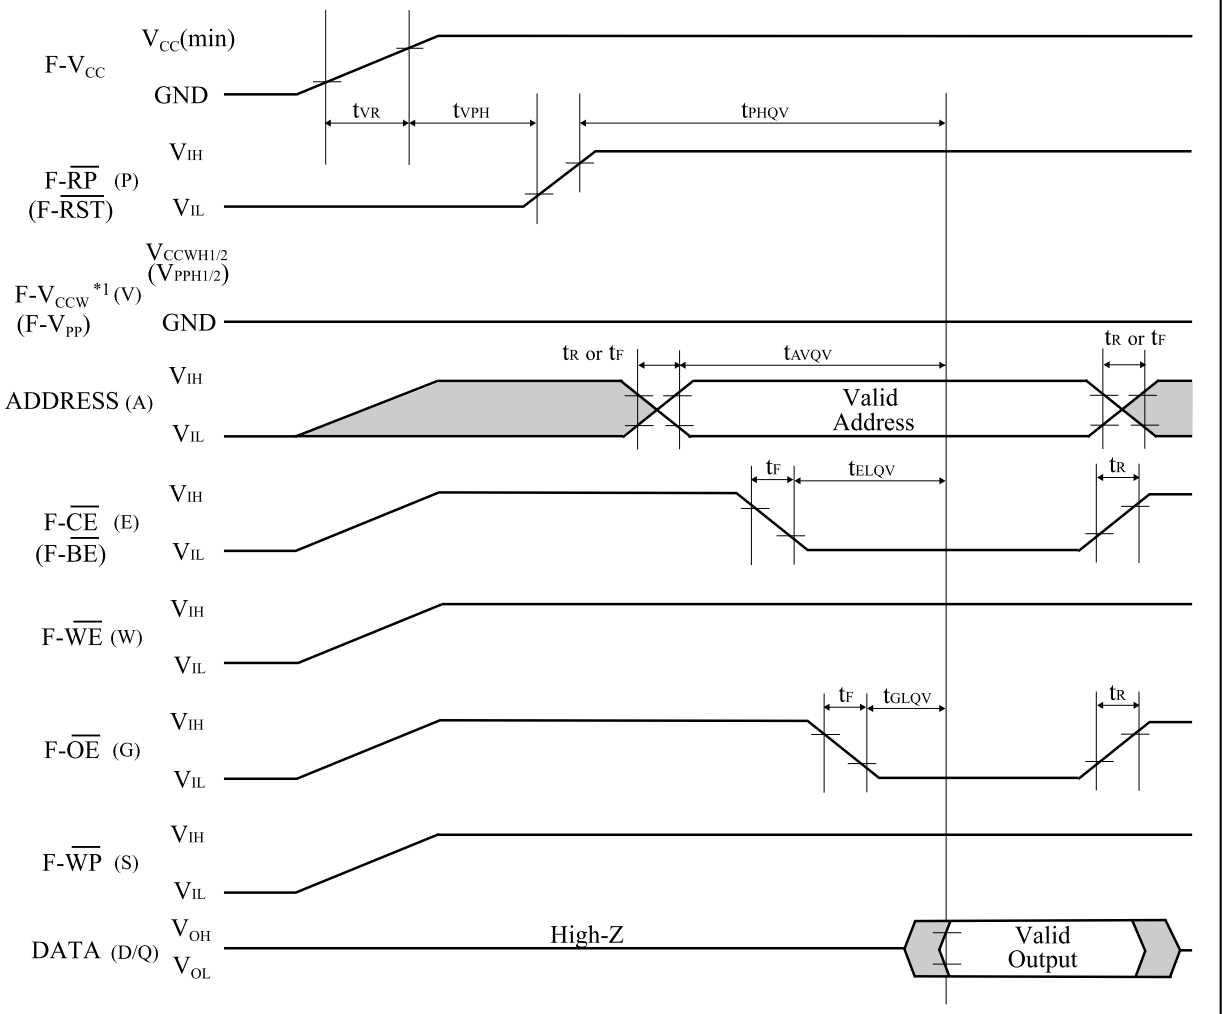

*1 To prevent the unwanted writes, system designers should consider the design, which applies F-V_{CCW} (F-V_{PP}) to 0V during read operations and $V_{CCWH1/2}$ ($V_{PPH1/2}$) during write or erase operations. See the application note AP-007-SW-E for details.

Figure A-1. AC Timing at Device Power-Up

For the AC specifications t_{VR}, t_R, t_F in the figure, refer to the next page. See the "AC Electrical Characteristics for Flash Memory" described in specifications for the supply voltage range, the operating temperature and the AC specifications not shown in the next page.

A-1.1.1 Rise and Fall Time

Symbol	Parameter	Notes	Min.	Max.	Unit
t_{VR}	F-V_{CC} Rise Time	1	0.5	30000	µs/V
t_R	Input Signal Rise Time	1, 2		1	µs/V
t_F	Input Signal Fall Time	1, 2		1	µs/V

NOTES:

1. Sampled, not 100% tested.
2. This specification is applied for not only the device power-up but also the normal operations.

A-1.2 Glitch Noises

Do not input the glitch noises which are below V_{IH} (Min.) or above V_{IL} (Max.) on address, data, reset, and control signals, as shown in Figure A-2 (b). The acceptable glitch noises are illustrated in Figure A-2 (a).

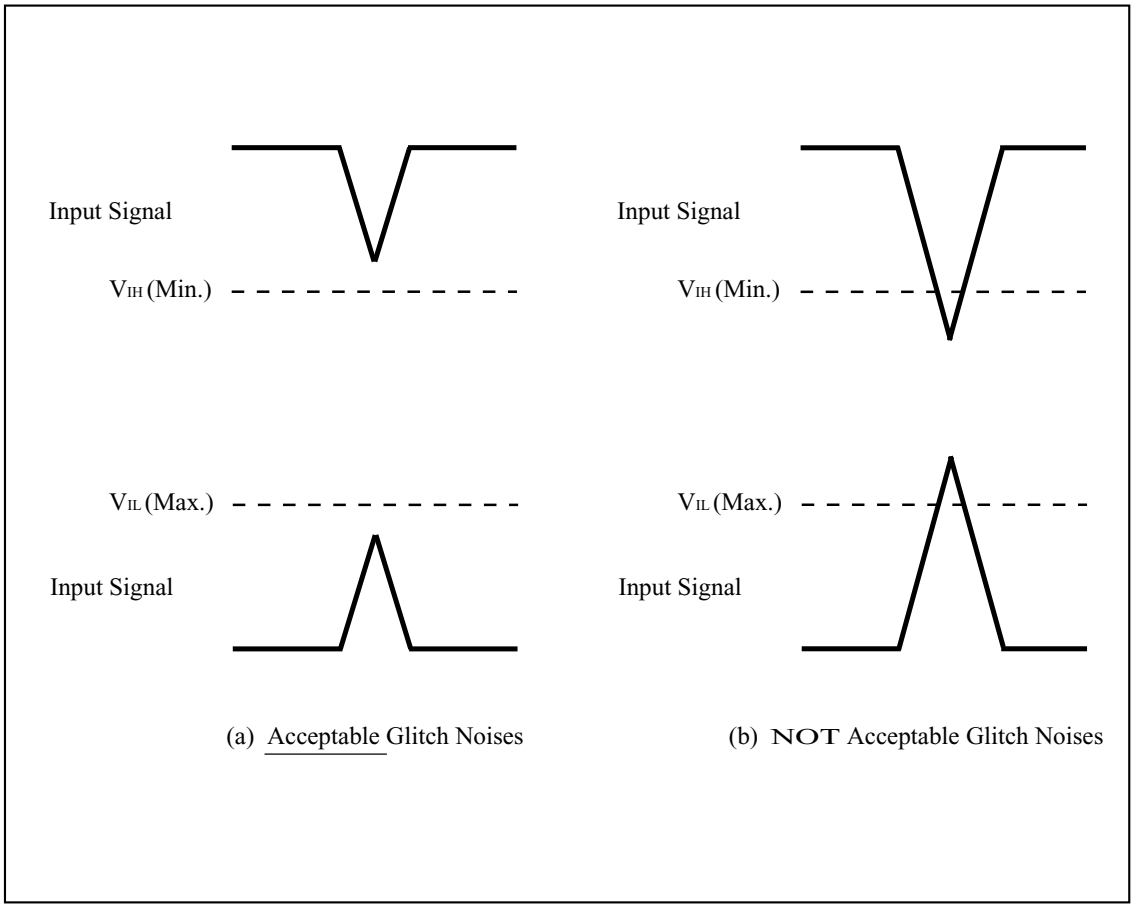

Figure A-2. Waveform for Glitch Noises

See the “DC Electrical Characteristics” described in specifications for V_{IH} (Min.) and V_{IL} (Max.).

A-2 RELATED DOCUMENT INFORMATION(1)

Document No.	Document Name
AP-001-SD-E	Flash Memory Family Software Drivers
AP-006-PT-E	Data Protection Method of SHARP Flash Memory
AP-007-SW-E	RP#, V_{PP} Electric Potential Switching Circuit

NOTE:
1. International customers should contact their local SHARP or distribution sales office.

B-1 POWER UP SEQUENCE OF Smartcombo RAM

When turning on Smartcombo RAM power supply, the following sequence is needed.

B-1.1 Sequence of Smartcombo RAM Power Supply

(1) Supply power.
(2) Keep S-CE_2 low longer than or equal to 50µs. (See NOTES *1)
(3) Keep S-$\overline{CE}_1$ and S-CE_2 high longer than or equal to 200µs. (See NOTES *2)
(4) End of Initialization.

By executing above (1) to (4), the initialization of chip inside and the power occurred inside become stable.

<Example of the actual connection>

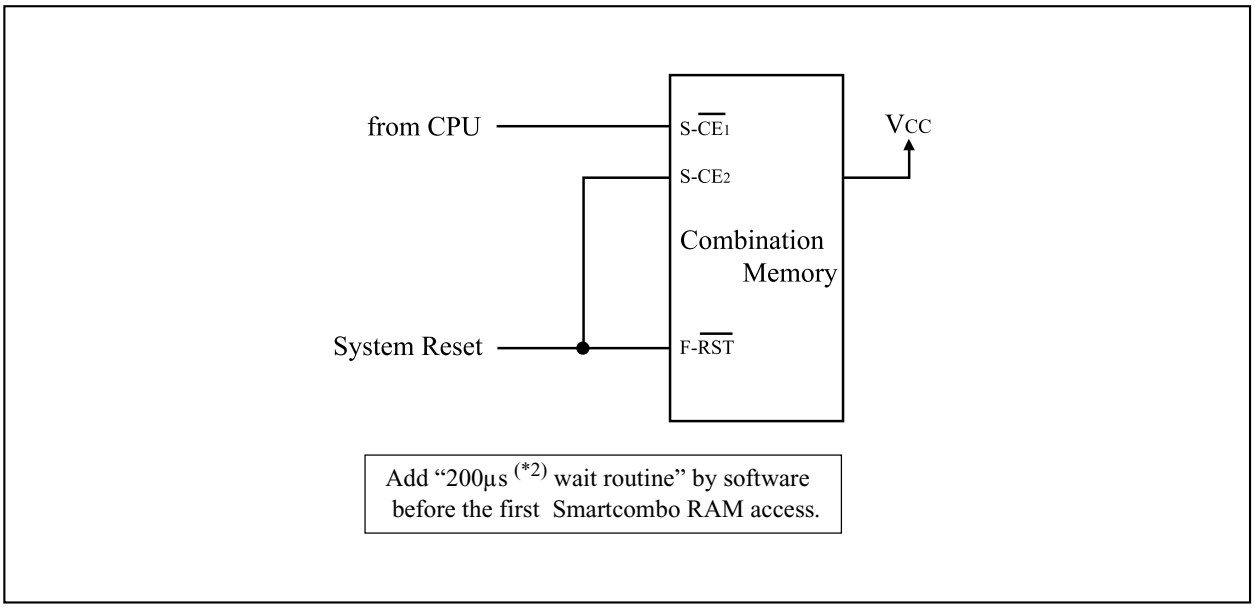

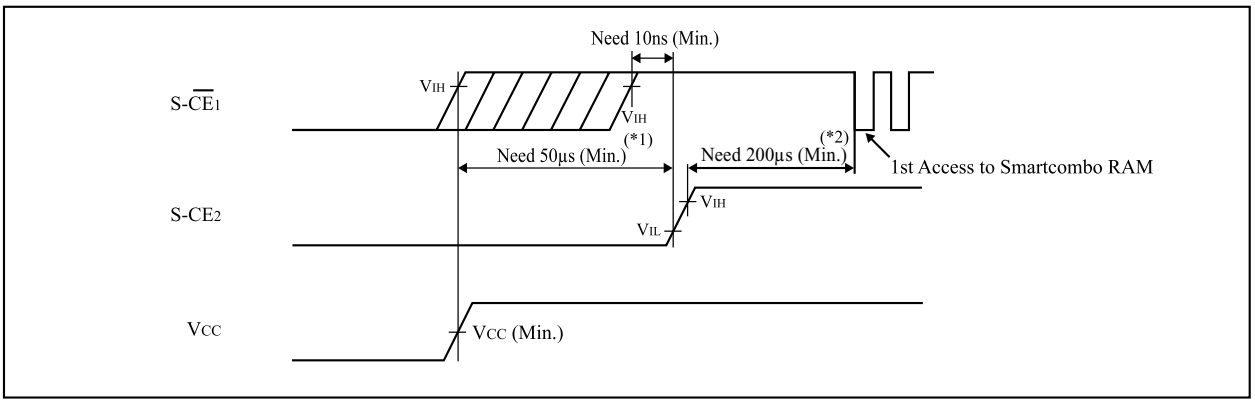

NOTES:

*1) Connect System Reset signal to S-CE_2 and hold S-CE_2 low longer than or equal to 50µs.

*2) By adding "200µs Wait Routine" (S-$\overline{CE}_1$ and S-CE_2 high) in the software, delay the first access to Smartcombo RAM longer than or equal to 200µs.
When giving compatibility with the other type of Smartcombo RAM, 200µs must be changed to 300µs.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Suggested applications (if any) are for standard use; See Important Restrictions for limitations on special applications. See Limited Warranty for SHARP's product warranty. The Limited Warranty is in lieu, and exclusive of, all other warranties, express or implied. ALL EXPRESS AND IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR USE AND FITNESS FOR A PARTICULAR PURPOSE, ARE SPECIFICALLY EXCLUDED. In no event will SHARP be liable, or in any way responsible, for any incidental or consequential economic or property damage.

SHARP®

NORTH AMERICA

SHARP Microelectronics of the Americas
5700 NW Pacific Rim Blvd.
Camas, WA 98607, U.S.A.
Phone: (1) 360-834-2500
Fax: (1) 360-834-8903
Fast Info: (1) 800-833-9437
www.sharpsma.com

EUROPE

SHARP Microelectronics Europe
Division of Sharp Electronics (Europe) GmbH
Sonninstrasse 3
20097 Hamburg, Germany
Phone: (49) 40-2376-2286
Fax: (49) 40-2376-2232
www.sharpsme.com

JAPAN

SHARP Corporation
Electronic Components & Devices
22-22 Nagaike-cho, Abeno-Ku
Osaka 545-8522, Japan
Phone: (81) 6-6621-1221
Fax: (81) 6117-725300/6117-725301
www.sharp-world.com

TAIWAN

SHARP Electronic Components
(Taiwan) Corporation
8F-A, No. 16, Sec. 4, Nanking E. Rd.
Taipei, Taiwan, Republic of China
Phone: (886) 2-2577-7341
Fax: (886) 2-2577-7326/2-2577-7328

SINGAPORE

SHARP Electronics (Singapore) PTE., Ltd.
438A, Alexandra Road, #05-01/02
Alexandra Technopark,
Singapore 119967
Phone: (65) 271-3566
Fax: (65) 271-3855

KOREA

SHARP Electronic Components
(Korea) Corporation
RM 501 Geosung B/D, 541
Dohwa-dong, Mapo-ku
Seoul 121-701, Korea
Phone: (82) 2-711-5813 ~ 8
Fax: (82) 2-711-5819

CHINA

SHARP Microelectronics of China
(Shanghai) Co., Ltd.
28 Xin Jin Qiao Road King Tower 16F
Pudong Shanghai, 201206 P.R. China
Phone: (86) 21-5854-7710/21-5834-6056
Fax: (86) 21-5854-4340/21-5834-6057
Head Office:
No. 360, Bashen Road,
Xin Development Bldg. 22
Waigaoqiao Free Trade Zone Shanghai
200131 P.R. China
Email: smc@china.global.sharp.co.jp

HONG KONG

SHARP-ROXY (Hong Kong) Ltd.
3rd Business Division,
17/F, Admiralty Centre, Tower 1
18 Harcourt Road, Hong Kong
Phone: (852) 28229311
Fax: (852) 28660779
www.sharp.com.hk
Shenzhen Representative Office:
Room 13B1, Tower C,
Electronics Science & Technology Building
Shen Nan Zhong Road
Shenzhen, P.R. China
Phone: (86) 755-3273731
Fax: (86) 755-3273735