
ASTI component architecture

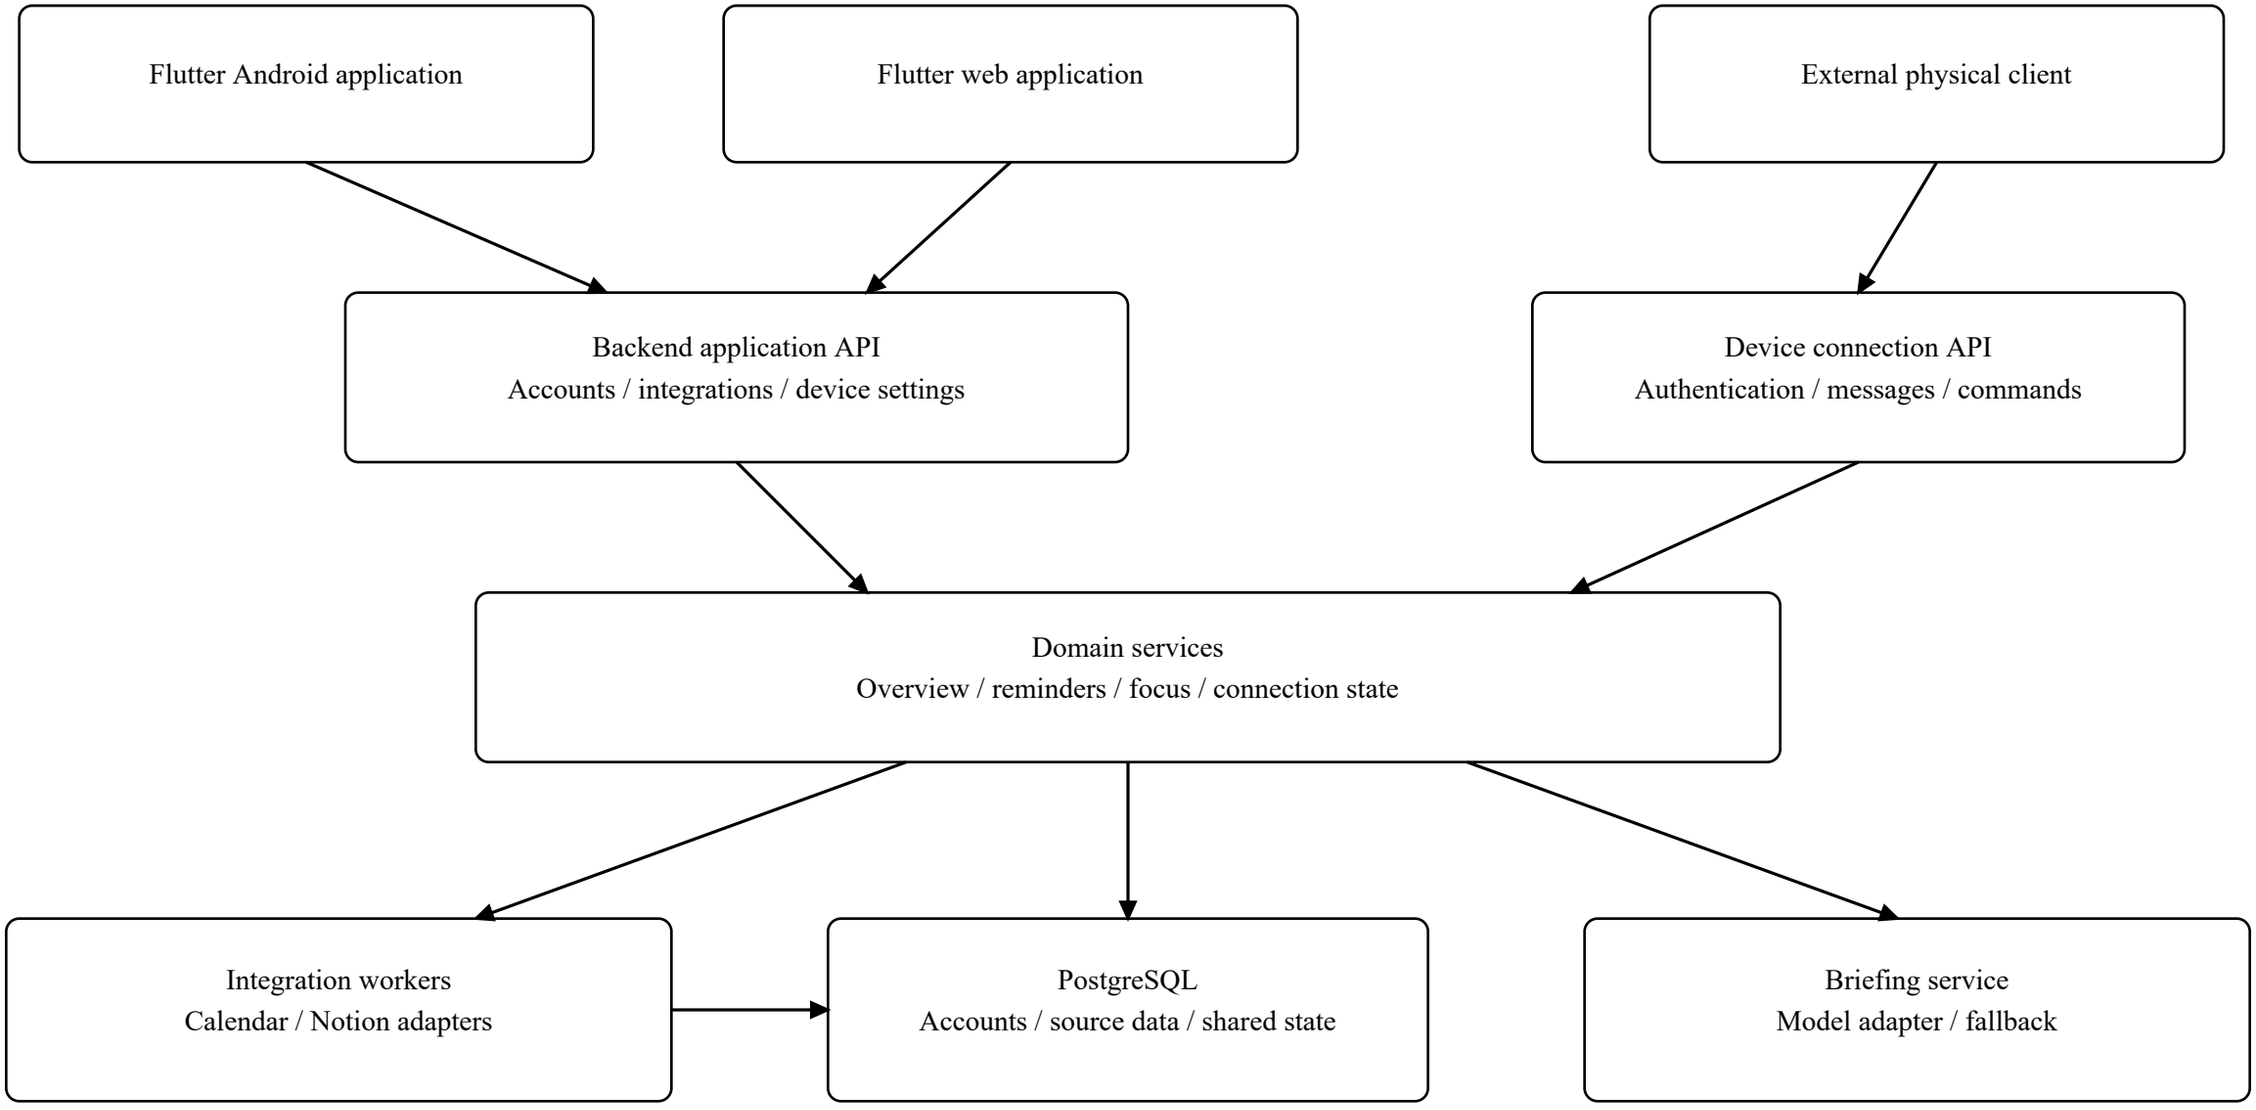

External clients use the connection API; firmware is outside the platform.