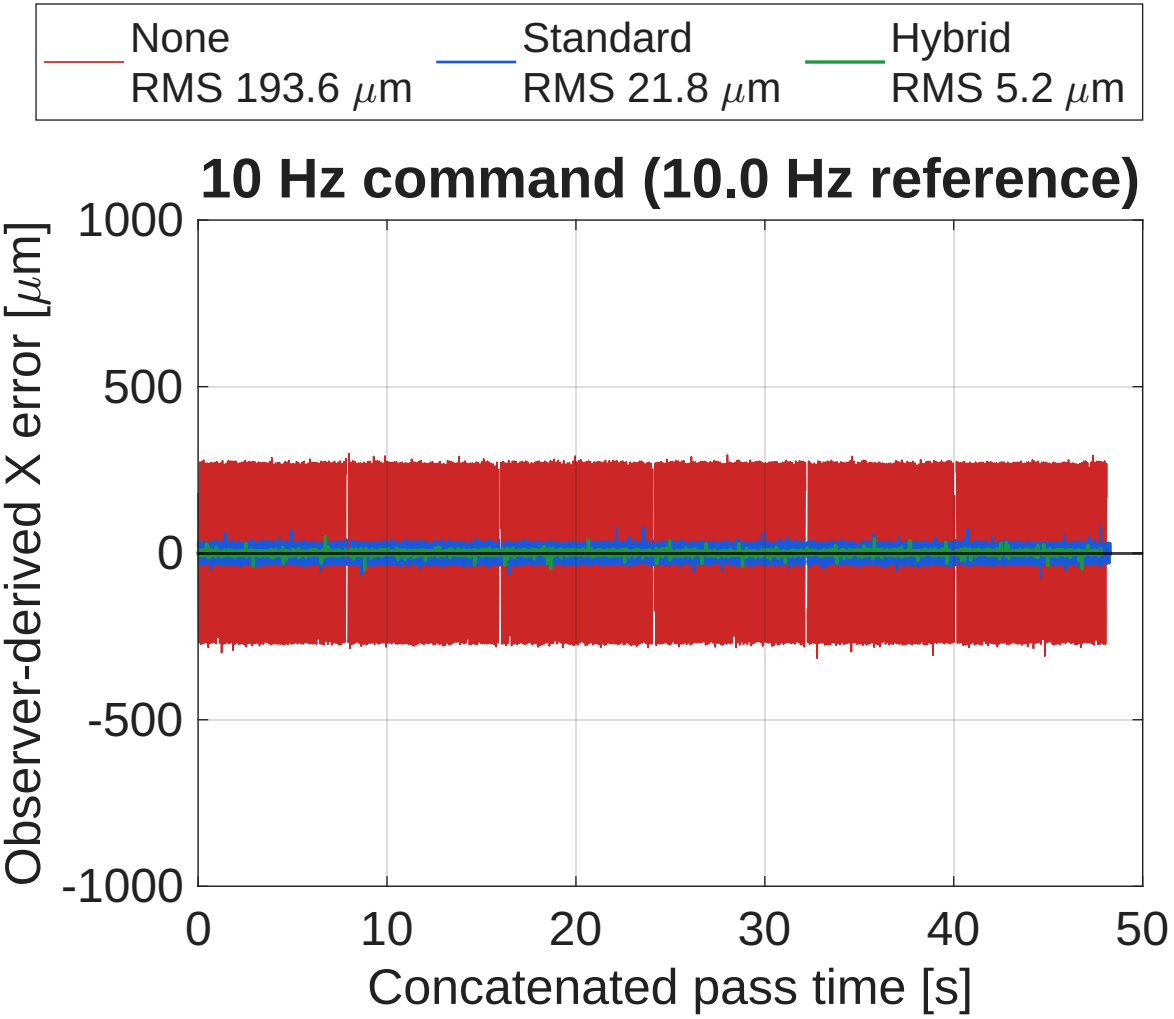

None
RMS 193.6 μm
Standard
RMS 21.8 μm
Hybrid
RMS 5.2 μm
10 Hz command (10.0 Hz reference)
Observer-derived X error [μm]
1000
500
0
-500
-1000
0
10
20
30
40
50
Concatenated pass time [s]