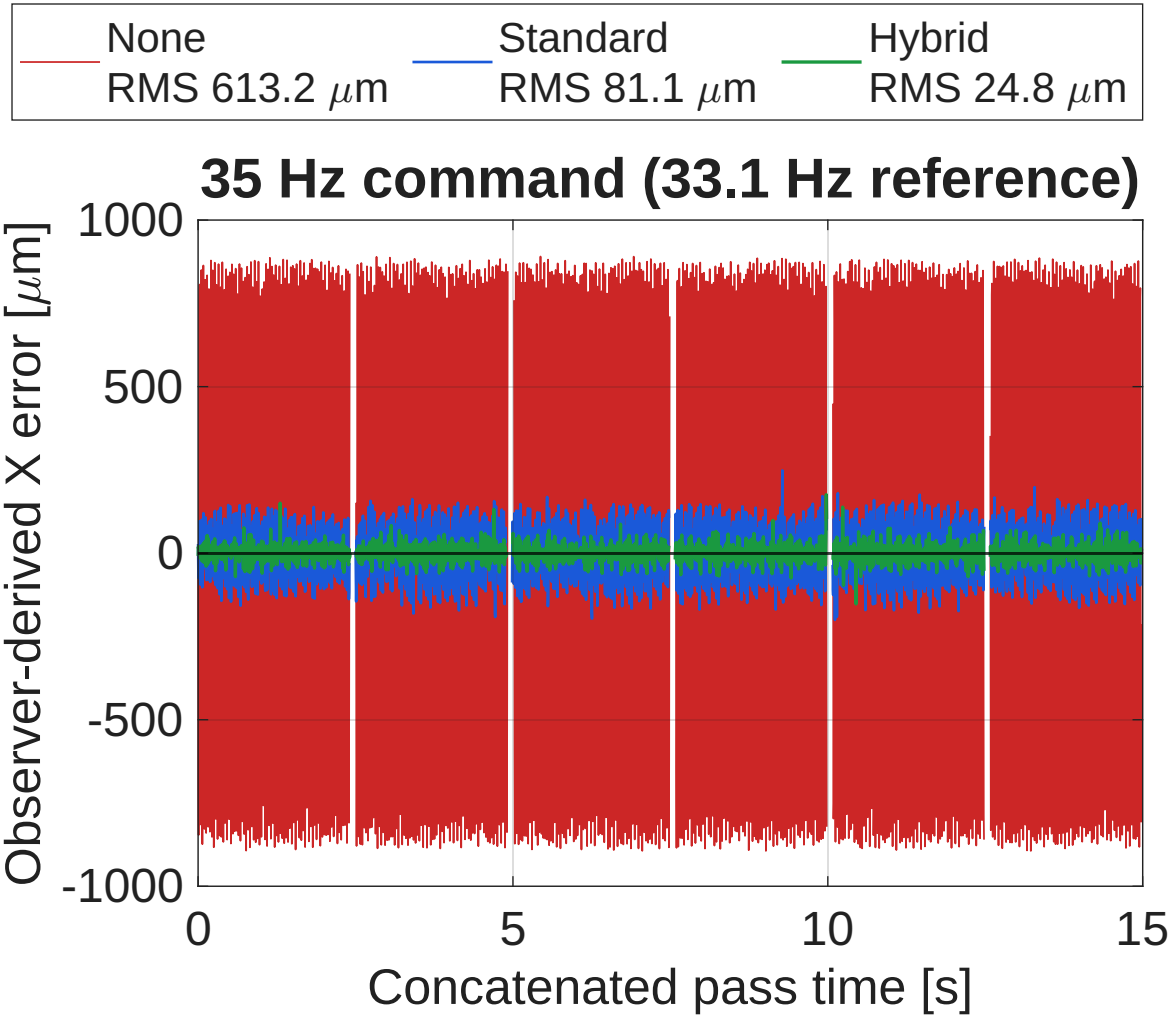

None
RMS 613.2 μm
Standard
RMS 81.1 μm
Hybrid
RMS 24.8 μm
35 Hz command (33.1 Hz reference)
Observer-derived X error [μm]
1000
500
0
-500
-1000
0
5
10
15
Concatenated pass time [s]