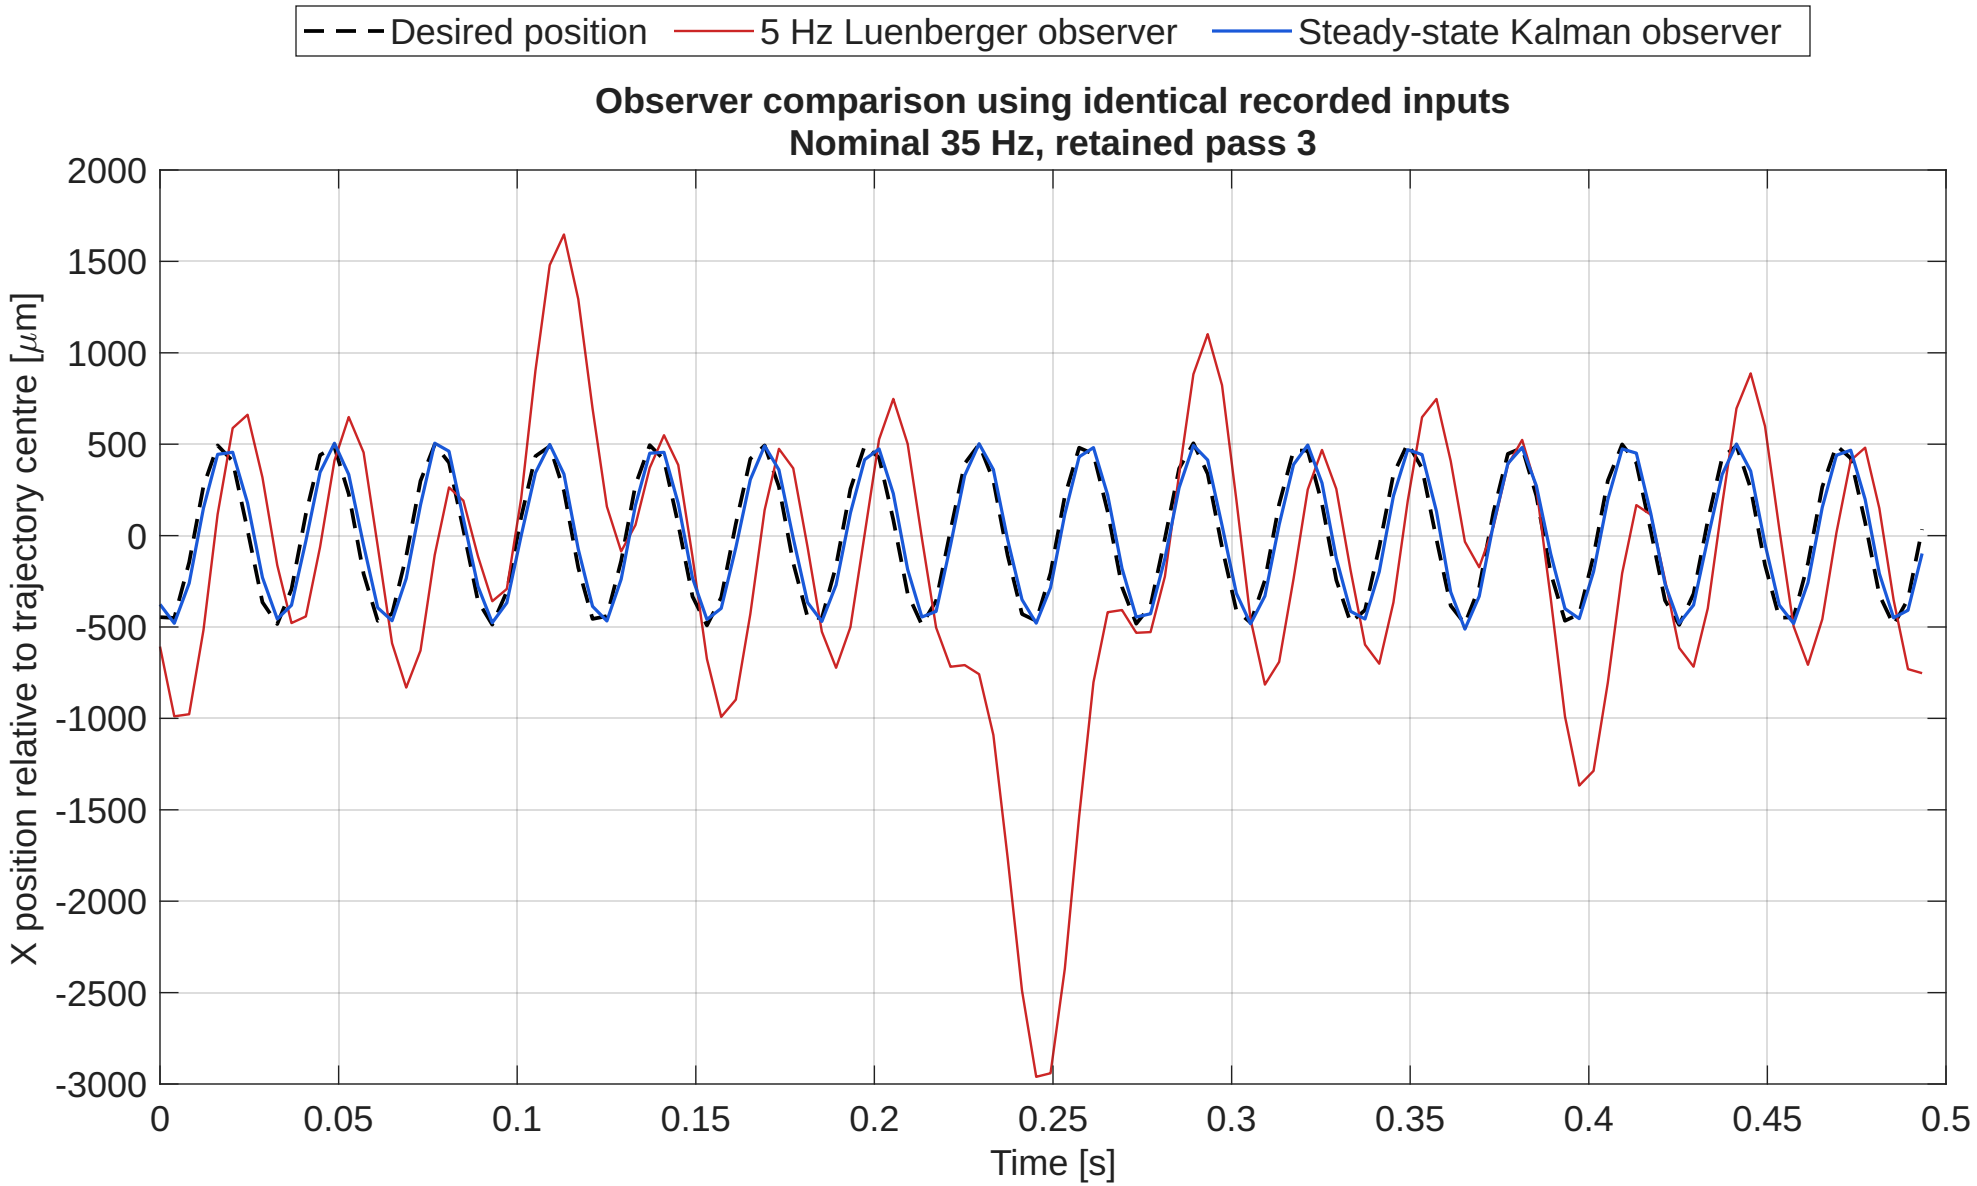
Desired position
5 Hz Luenberger observer
Steady-state Kalman observer
Observer comparison using identical recorded inputs
Nominal 35 Hz, retained pass 3
X position relative to trajectory centre [μm]
Time [s]
2000
1500
1000
500
0
-500
-1000
-1500
-2000
-2500
-3000
0
0.05
0.1
0.15
0.2
0.25
0.3
0.35
0.4
0.45
0.5