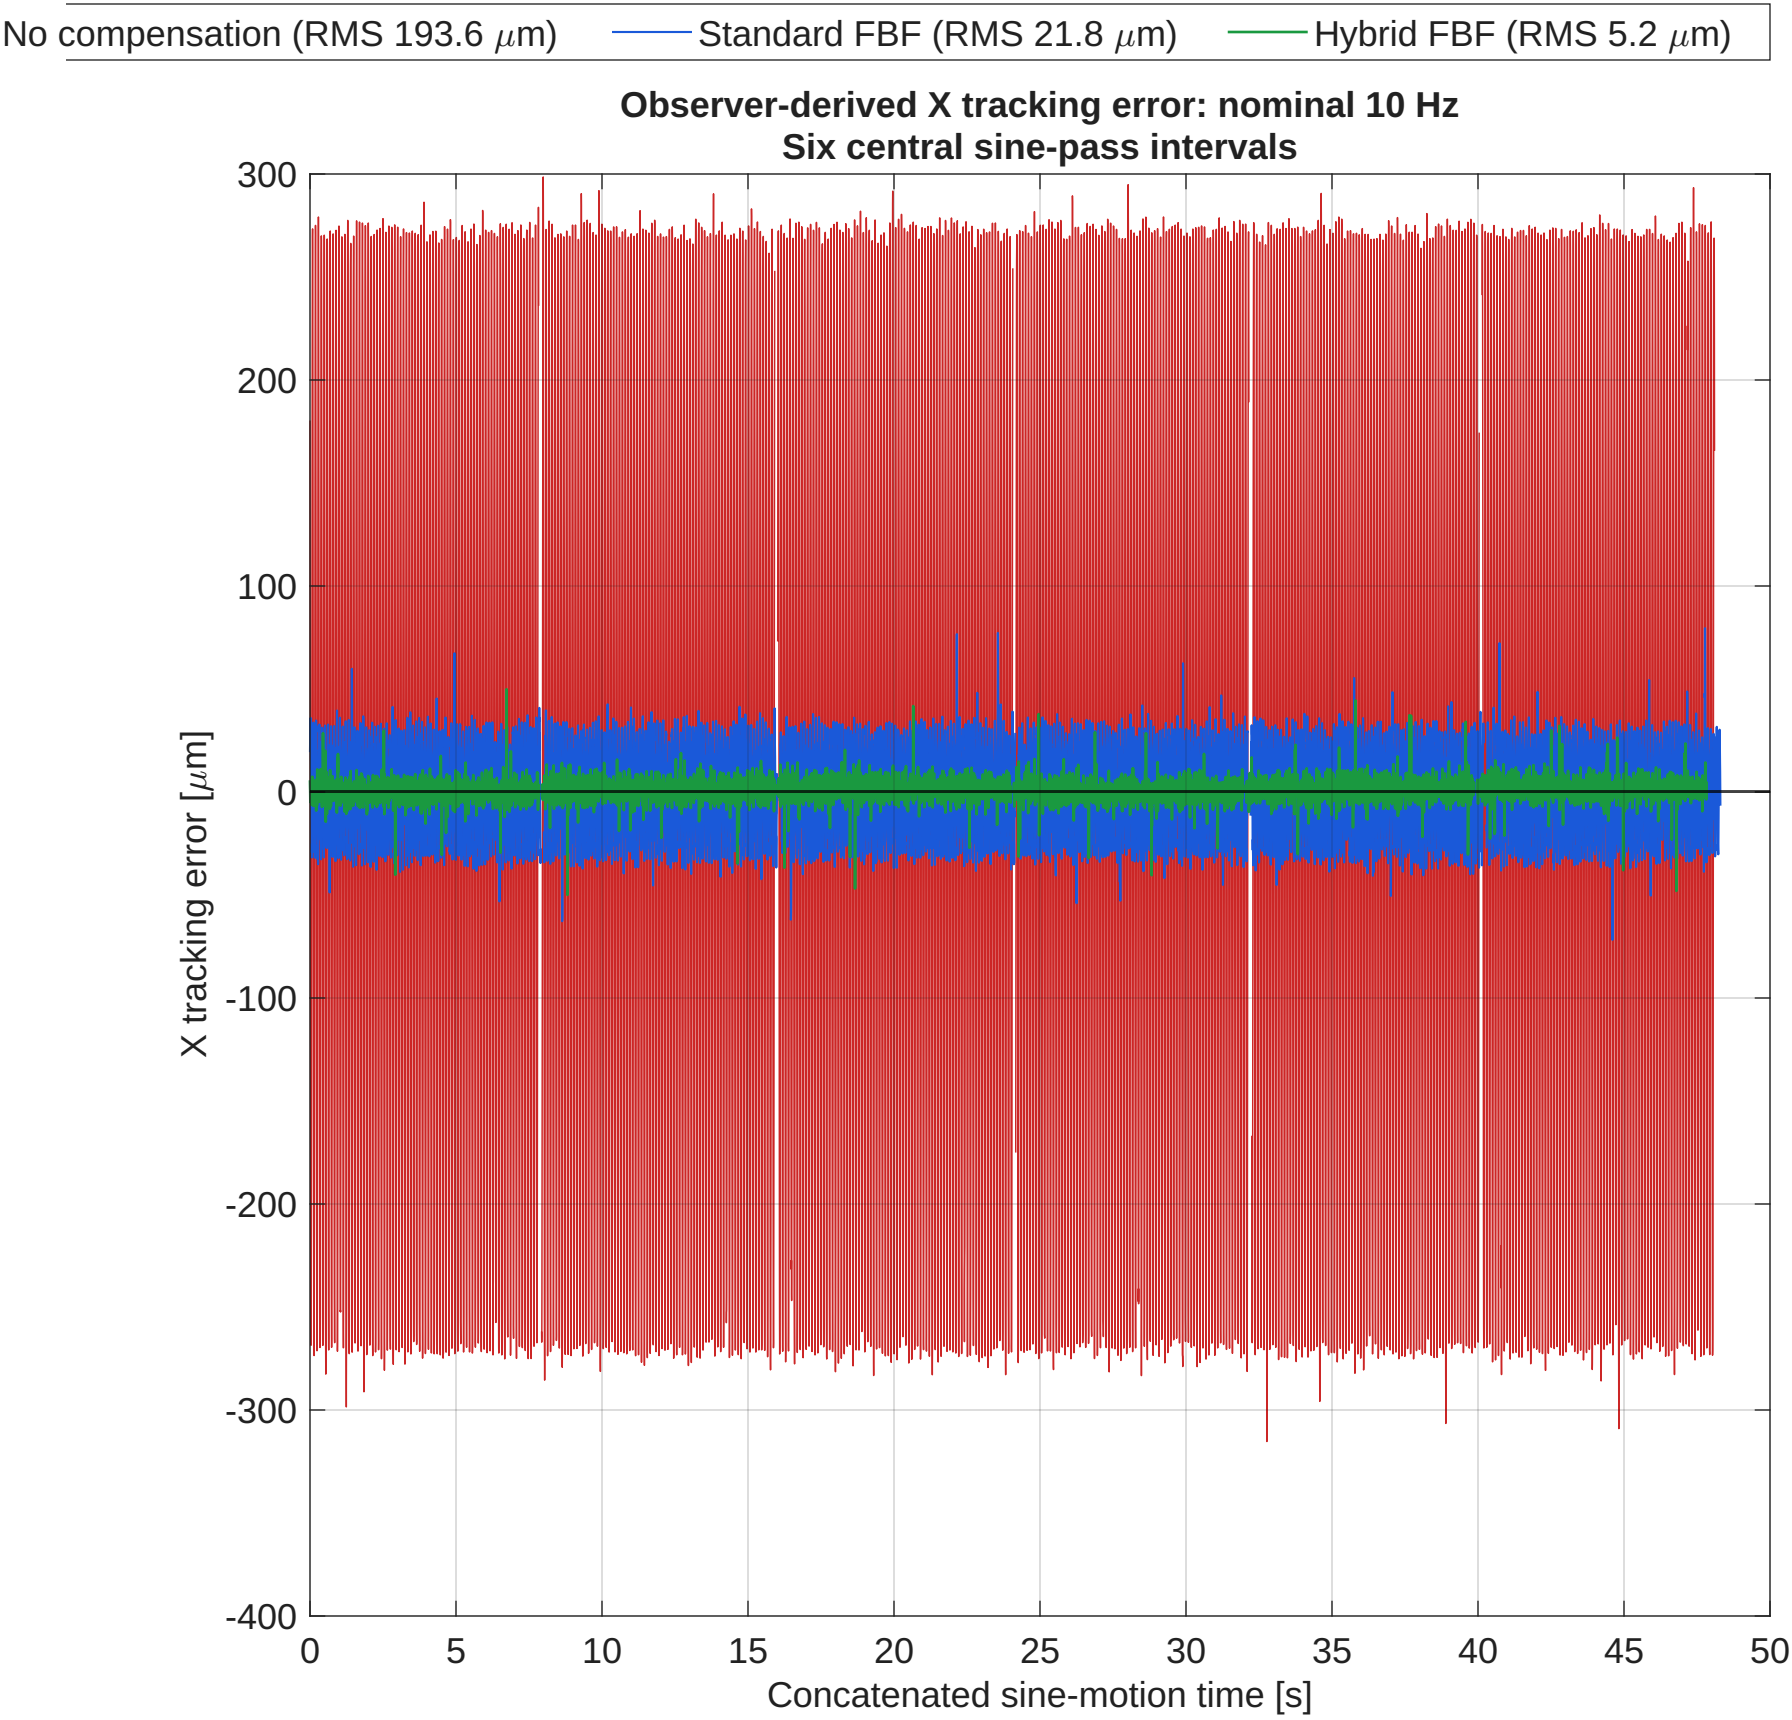

No compensation (RMS 193.6 μm)
Standard FBF (RMS 21.8 μm)
Hybrid FBF (RMS 5.2 μm)
Observer-derived X tracking error: nominal 10 Hz
Six central sine-pass intervals
X tracking error [μm]
300
200
100
0
-100
-200
-300
-400
0
5
10
15
20
25
30
35
40
45
50
Concatenated sine-motion time [s]