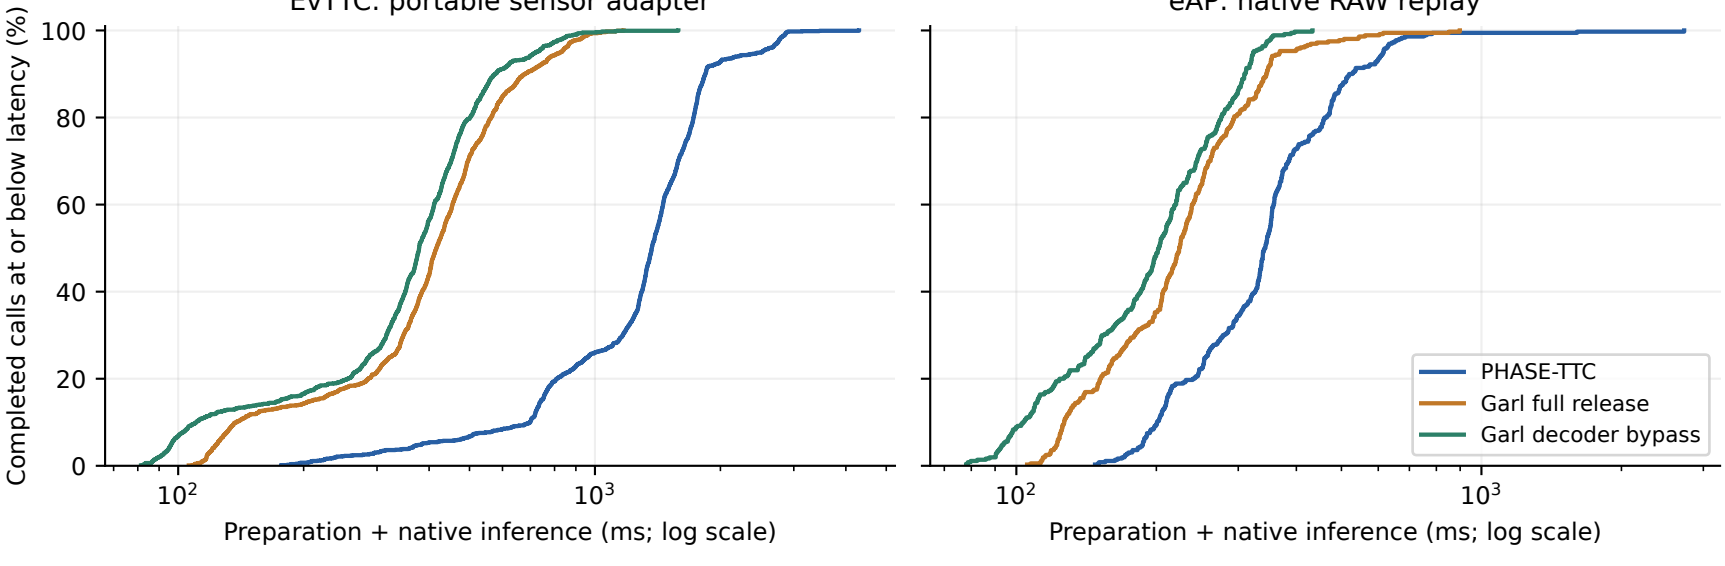
EvTTC: portable sensor adapter
eAP: native RAW replay
Completed calls at or below latency (%)
0
20
40
60
80
100
10^2
10^3
Preparation + native inference (ms; log scale)
PHASE-TTC
Garl full release
Garl decoder bypass