


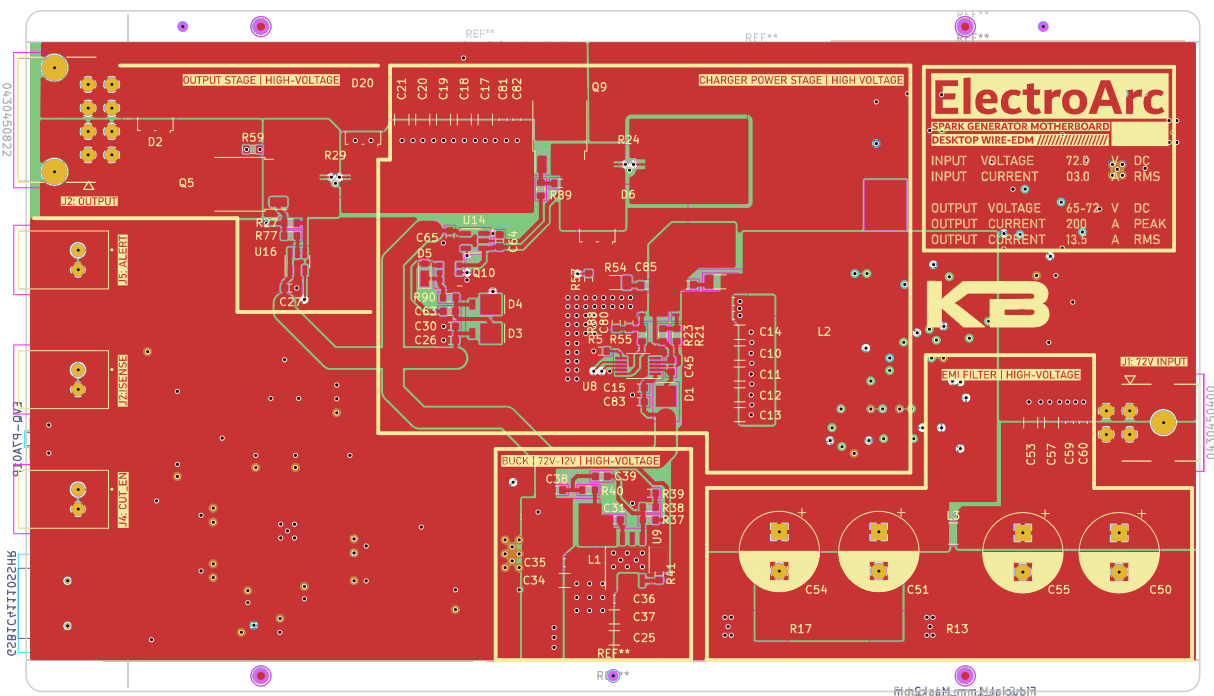

BOARD CHARACTERISTICS

Copper Layer Count:	6	Board Thickness:	60 mils
Board overall dimensions:	5905 mils x 3150 mils	Min hole diameter:	12 mils
Min track/spacing:	7.80 mils / 7.80 mils	Impedance Control:	No
Copper Finish:	ENIG	Plated Board Edge:	No
Castellated pads:	No		
Edge card connectors:	No		

FAB NOTES:

1. FABRICATE PER IPC-A-6012 CLASS 2
2. ALL DIMENSIONS SHALL BE TAKEN FROM THE ACCOMPANYING DATABASE
3. REMOVAL OF NON-FUNCTIONAL PADS IS ACCEPTABLE
4. PRINT PER GERBERS
5. FABRICATION SHALL BE CAPABLE OF WITHSTANDING ROHS LEVEL ASSEMBLY
6. PLATE ALL EXPOSED CONDUCTIVE SURFACES WITH ENIG PER IPC-4552B
7. SOLDER MASK OVER BARE COPPER IAW IPC-SM-840. BOTH SIDES USING LPI, BLACK. TOOLING HOLES TO BE FREE AND CLEAR OF SOLDER MASK AND SOLDER MASK NODULES
8. SOLDER MASK CLEARANCE 3 MIL MIN WEB
9. APPLY SILKSCREEN USING WHITE, NON-CONDUCTIVE EPOXY INK
10. COPPER PLATE TFOR THRU-HOLES SHALL HAVE 1 MIL MIN WALL THICKNESS
11. DESIGN HAS VIA-IN-PAD:
ALL 12MIL VIAS TO BE FILLED AND CAPPED PER IPC-4761 TYPE VII
12. BARE BOARDS SHALL BE TESTED USING CAD GENERATED NET LIST
13. OUTER COPPER WEIGHT: 20Z
14. INNER COPPER WEIGHT 10Z