



“Strength For Next Generation”





About us

LEXORA is your one stop solution for everything related to Construction Chemicals, Epoxy, Adhesives, Admixtures, Sealers and other various application like grouting, fixing tilex, waterproofing, At LEXORA we have implemented world class practices that ensure our products lasts long. Bid good bye to all your worries with regards to chemicals.
Say hello to a worry free future,
say hello to **LEXORA CHEMBOND LLP**





Big Vision

“

To be India's most trusted and innovative manufacturer of chemical building materials, delivering high-performance solutions that power the future of infrastructure. Our vision is to build a world-class factory that leads with safety, sustainability, and smart automation—setting new benchmarks in quality, efficiency, and environmental responsibility.

”





CONTENTS:

TILES ADHESIVE

- ◆ LX-01
- ◆ LX-02
- ◆ LX-03
- ◆ LX-04

PU-ADHESIVE

BLOCK JOINTING MORTAR

TILES EPOXY

- ◆ 3 Part L-poxy
- ◆ 2 Part L-poxy

TILES GROUT

- ◆ Tiles Grout
- ◆ Grout Admixture
- ◆ SBR Latex

LEXTILE

LEXTITE(ARRODITE)

TILES CARE

- ◆ Tiles Cleaner

TILES ACCESSORIES

- ◆ Tiles Spacer
- ◆ Tiles Levelling Kit





U FOR FIXING FLOOR TILES



LX-01 TILES ADHESIVE

Tile fixing adhesive for
Internal Floor applications.

PACKING
20 kg

Color : GREY



LX-01 (type-1)

Tiling Solutions
Packing 20 Kg

Product Details

LEXORA LX-01 is a high polymer modified, cement-based til adhesive which is suitable for fixing tiles. cement torrazo, concrete floor, natural stones, vitrified tiles in interior and exterior floor areas.

Application Area

Applying For Flooring tile 24x24, 16x16, 12x12 parking Tiles

Technical Information

PROPERTIES	RESULTS
Appearance	Free flowing powder
Colour	Grey
Pot life	3 Hours
Open time	20 Min.
Adjustability time	10 Min.
Trafficable time, Hrs	24
Shear adhesion, dry condition (as per annex B)	1.09 N/mm ²
Tensile adhesion, dry condition (as per annex A)	1.0 n/mm ²
EN 12004 Standards	C1T

Features

- Excellent bond strength
- No shrinkage
- Easy to spread
- Consistent in quality
- Nil wastages
- No curing required
- Single component no hassles of mixing the ingredients.

Shelf life & storage

In unopened condition, the shelf life is 12 months from the date of manufacturing Store in a cool & dry place



FOR FIXING WALL & VITRIFIED TILES



LX-02 TILES ADHESIVE

Tile fixing adhesive for
Internal Floor applications.

PACKING
20 kg

Color : GREY



LX-02 (type-2)

Tiling Solutions
Packing 20 Kg

Product Details

LEXORA LX-02 (Grey) is a high polymer modified, adhesive for vitrified, granite on wall cladding and floor for internal & external use.

Application Area

Applying for Wall and Vitrified tiles for interior and exterior used (tile on tile 12x24, 800x800, High Depth Elevation, 600x1200mm upto 8 feet)

Technical Information

PROPERTIES	RESULTS
Appearance	Free flowing powder
Colour	White & Grey
Pot life	3 Hours
Open time	20 Min.
Adjustability time	10 Min.
Trafficable time, Hrs	24
Shear adhesion, (as per annex B) dry condition heat condition wet condition	>1.50 N/mm ² >1.20 N/mm ² >1.10 N/mm ²
Tensile adhesion, (as per annex A) dry condition wet condition	>1.40 N/mm ² >1.10 N/mm ²
EN 12004 Standards	C2T

Features

- Excellent bond strength
- No shrinkage
- Easy to spread
- Consistent in quality
- Nil wastages
- No curing required
- Single component no hassles of mixing the ingredients.

Shelf life & storage

In unopened condition, the shelf life is 12 months from the date of manufacturing Store in a cool & dry place



For Fixing Vitrified tiles



LX-03 TILES ADHESIVE

Tile fixing adhesive for
Internal Floor applications.

PACKING

20 kg

Color :
GREY
WHITE



LX-03 (type-3)

Product Details

LEXORA LX-03 (Grey & white) is a high polymer modified, white cement based, high performance, high strength and high quality tile adhesive developed to fix glass mosaic, italian marble and special tiles, Suitable for both internal and external, thin bed applications.

Application Area

Applying for wall and vitrified tiles for exterior and interior used (800x800, 1000x1000, 800x1600 600x1200up to 20 feet) Wooden Planks.

- ▶ Applying small size marble & granites on wall externally (up to 800x1200mm)

Features

- Excellent bond strength
- No shrinkage
- Easy to spread
- Consistent in quality
- Nil wastages
- No curing required
- Single component no hassles of mixing the ingredients.

Shelf life & storage

In unopened condition, the shelf life is 12 months from the date of manufacturing Store in a cool & dry place

Technical Information

PROPERTIES	RESULTS
Appearance	Free flowing powder
Colour	White & Grey
Pot life	3 Hours
Open time	20 Min.
Adjustability time	10 Min.
Trafficable time, Hrs	24
Shear adhesion, (as per annex B) dry condition heat condition wet condition	> 1.55 N/mm ² > 1.30 N/mm ² > 1.15 N/mm ²
Tensile adhesion, (as per annex A) dry condition wet condition	> 1.60 N/mm ² > 1.20 N/mm ²
Deformability (as per annex F)	> 2.60 mm
EN 12004 Standards	C2TE



For Fixing Marbles & Slabs



LX-04 TILES ADHESIVE

Tile fixing adhesive for
Internal Floor applications.

PACKING

20 kg

Color :
GREY
WHITE



LX-04 (type-4)

Tiling Solutions
Packing 20 Kg

Product Details

LEXORA LX-04 is a high polymer modified, cement-based til adhesive which is suitable for fixing tiles, cement torrazo, concrete floor, natural stones, vitrified tiles in interior and exterior floor areas.

Application Area

Applying for wall and vitrified for interior and exterior used (1200x1800, 1200x1200, 1200x1600, 1200x1800, 800x2400, slabs) (600x1200 upto 30-40 feet)

Features

- Excellent bond strength
- No shrinkage
- Easy to spread
- Consistent in quality
- Nil wastages
- No curing required
- Single component no hassles of mixing the ingredients.

Shelf life & storage

In unopened condition, the shelf life is 12 months from the date of manufacturing Store in a cool & dry place

Technical Information

PROPERTIES	RESULTS
Appearance	Free flowing powder
Colour	White & Grey
Pot life	3 Hours
Open time	20 Min.
Adjustability time	10 Min.
Trafficable time, Hrs	24
Shear adhesion, (as per annex B) dry condition heat condition wet condition	> 1.55 N/mm ² > 1.30 N/mm ² > 1.15 N/mm ²
Tensile adhesion, (as per annex A) dry condition wet condition	> 1.60 N/mm ² > 1.20 N/mm ²
Deformability (as per annex F)	> 2.60 mm
EN 12004 Standards	C2TES1



For Fixing Wooden & Steel



PU - L29 ADHESIVE

For Internal & External Wall, Floor and stone fixing

Part-A 3200gm. + Part-B 800gm.

PACKING

4 kg

Master Cartoon : 4 Pcs.



PU 212+

Packing 4 Kg

DESCRIPTION

is a two part modified Polyurethane multi purpose thin-set adhesive for fixing all types of tiles and stones include (Composites engineered stone) on interior and exterior surface like Concrete Masonry & Brick Masonry, Cement mortar Beds & Plaster, Metal Substrates, dry wall boards, Plywood, all types of wood Substrate. It has been designed for fixing water Sensitive tiles / stones on deformable or absorbent / non-absorbent Substrate. **PU - L29** is highly flexible and water freeze and thermal shock resistant when fully cured.

USES

High flexibility laying of Ceramic Tiles & Stones on floor and walls, on absorbent and non-absorbent, deformable and non deformable Substrates Such as,

- Cement based Surface like Plaster, Concrete and Screeds.
- Engineered Stones & marble
- Plywood, Particle boards, Plaster boards, Gypsum fibre boards, MDF and Cement fibre boards.
- Epoxy & Polyurethane based Substrates
- Metal and glass Substrates.

FEATURES AND ADVANTAGES


- Highly flexible adhesive Sustain vibration
- High bond Strength and Chemical resistance
- Two Component easy to use, just mix and apply.
- Suitable for moisture Sensitive tiles & stones
- Freezing, Thermal Shock resistance

PHYSICAL PROPERTIES

Appearance	PART - A :- White Paste PART - B :- Cream Paste
Mixed Density	1.65 ± 0.1 kg / Liter
Shelf Life	12 Month in the Original Packing
Mixed Material Appearance	Off White Paste
Open Time	Minimum 60 minute
Adjustability	Minimum 60 minute
Pot Life	Minimum 60 minute
Verticle Slip	≤ 0.5 mm
Foot Traffic	≥ 24 Hour
Grouting	≥ 12 Hours on walls / ≥ 24 Hour on floors
Temperature range for application	10°C to 40°C
Coverage	2-4 Kg/m ² (Depends on layer thickness)
Interval before normal use	3 Days (7 Days for heavy duty traffic)



For Fixing Blocks

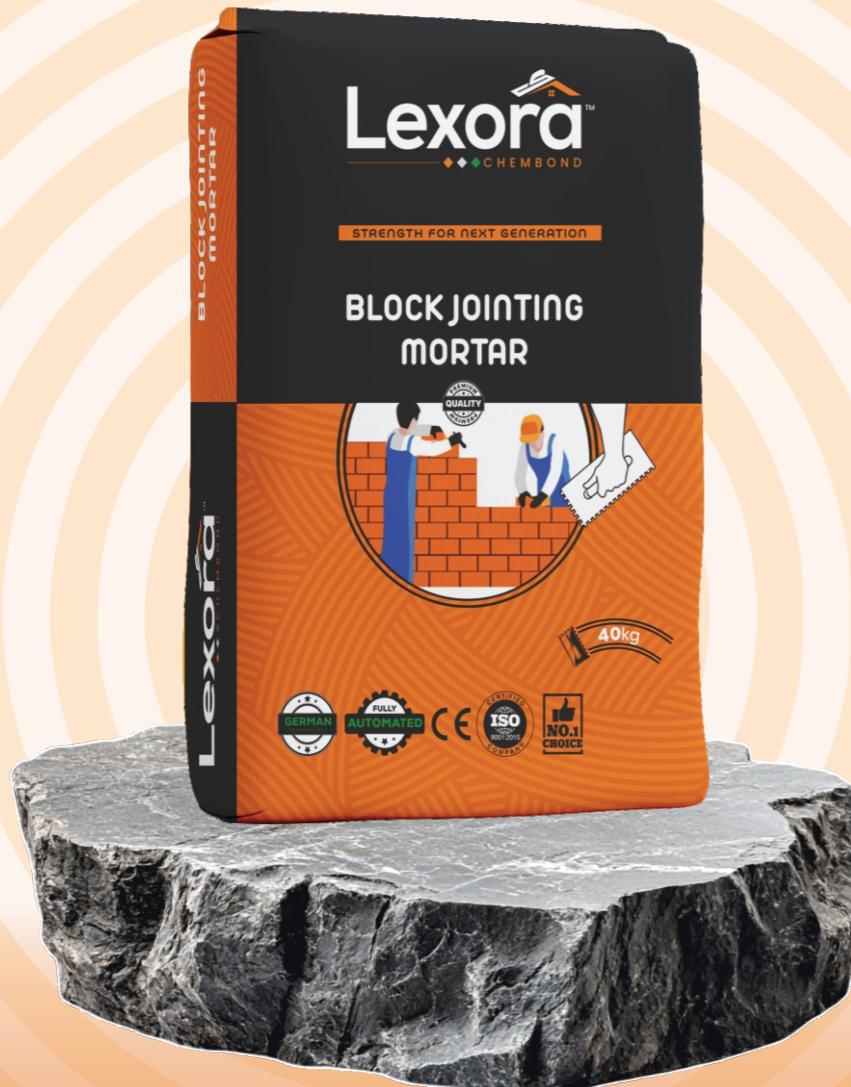

BLOCK JOINTING MORTAR

PACKING

40 kg

Color :
GREY



BLOCK JOINTING MORTAR

Description

LEXORA is a non-refractory mortar, used for laying masonry units like AAC blocks. It is a self curing mortar made from cement, selected fine sand and polymeric additives, which ensure good bonding and durable strength between the blocks.

Benefits

- For 4mm bed thickness
- Suitable for indulated blocks
- Block mounting full wall in 2-3 days
- The chiseling and conducting can be carried out after 14days
- The Plastering can be carried out after 7 days
- Can be applied with 90% material transfer
- Self curing adhesive



Epoxy 2 Part




Epoxy-2 Part

Stain free grout for
Floor & Wall (2 Part)

PACKING

1 kg / 5 Kg

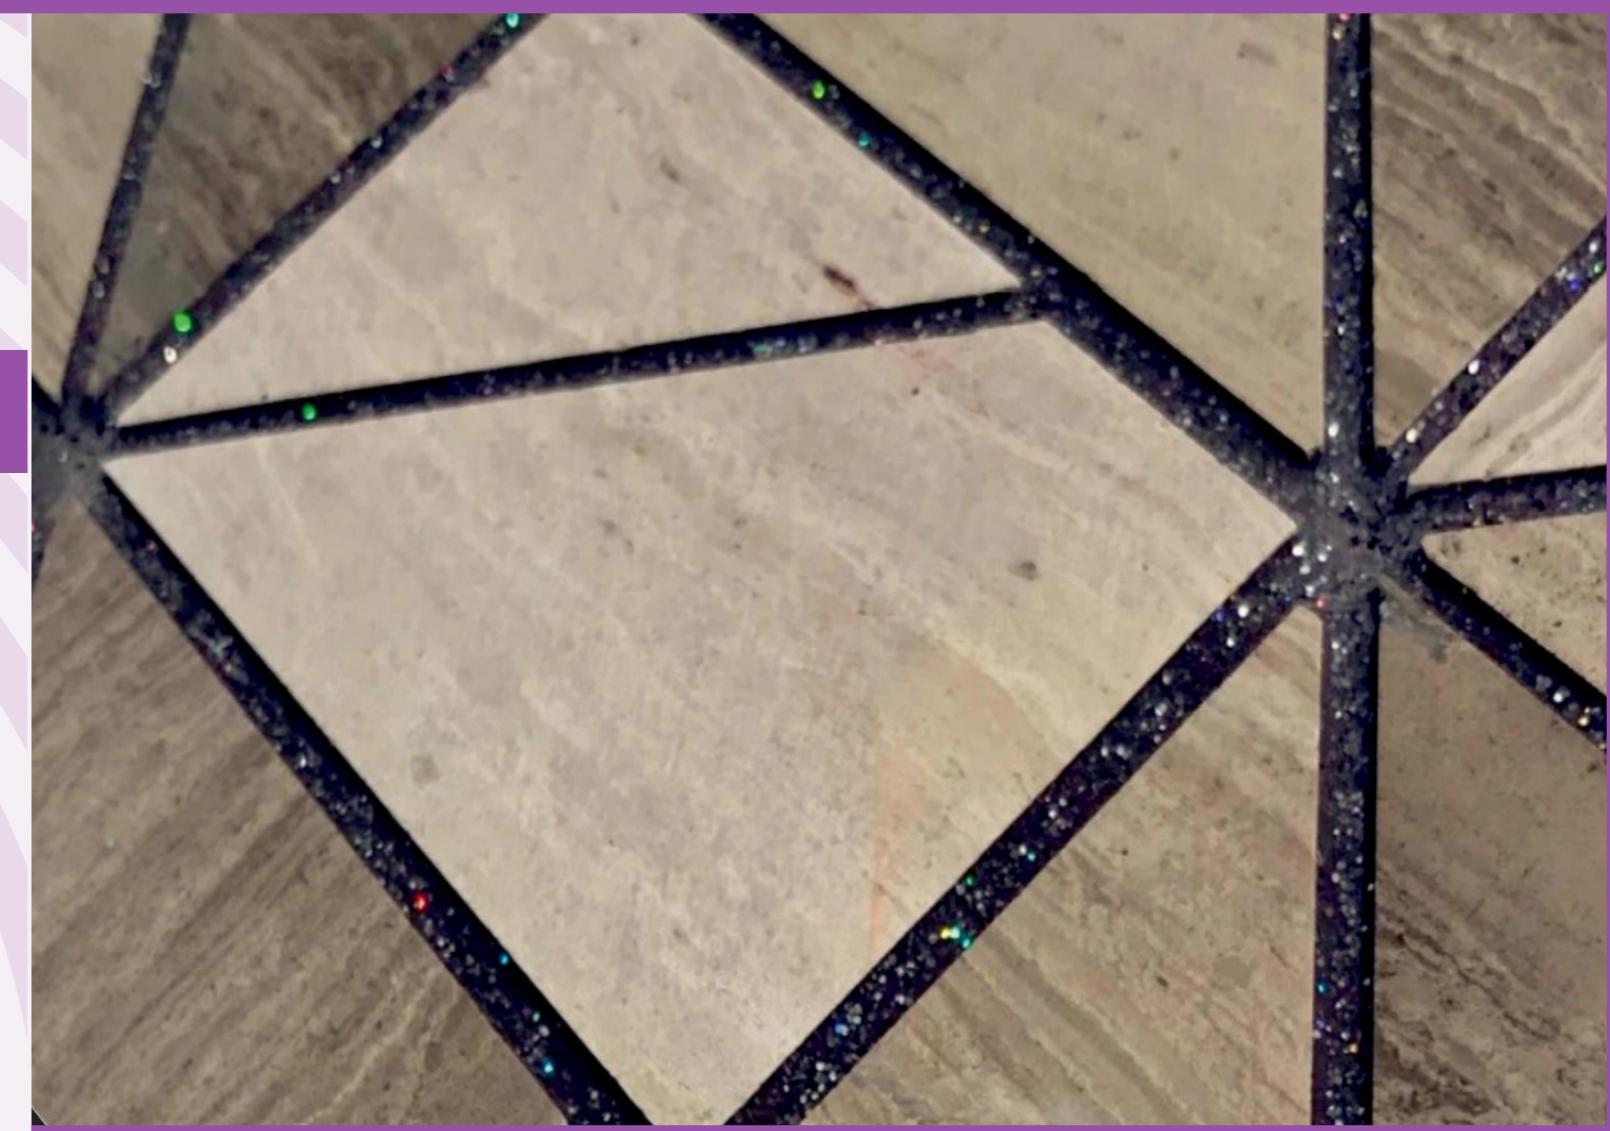

PRODUCT DETAILS

2 Part Epoxy easy is a two component, easy to use, epoxy based tile adhesive and grout. It is suitable for all types of tiles and stones on the floor and wall. It is especially recommended for hygiene sensitive areas and also areas which require sterile conditions.

USAGE

Anti-stain properties make it suitable for maintenance - free use in residential, commercial, & hospitality sector.

- High bond strength makes it suitable for use with ceramic tile, porcelian, and vitrified tiles, large format tiles & stones, low thickness slabs, natural stone, artificial stone, etc
- Low water absorption and resistance to a wide degree of temperature variation ensures that it can be used for wet areas, swimming pools, spas, jacuzzis, bathrooms, public toilets, and showers.

SHELF LIFE & STORAGE

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.



Epoxy 3 Part



Epoxy-3 Part

Stain free grout for
Floor & Wall (3 Part)

PACKING

1 kg / 5 Kg



PRODUCT DETAILS

LEXORA Epoxy is a hygienic, hard-wearing, impervious, epoxide resin-based epoxy grout with a high degree of resistance to chemical attack, abrasion and impact. The cured grout does not transfer taints to foodstuffs and does not permit the entry of bacteria or dirt. It is easily maintained in a sterile condition.

TECHNICAL SPECIFICATION

Joint Width	Pot Life @27+-2C°	Cure @27+-2C°	Temperature Resistance	Water Absorption	Specific Gravity
2-20mm	45 minutes	48 hours	Prolonged - 30C°to 150C° Intermittent	Nil(1)	1.75
				Tensile Adhesion (14 days air)	
				Dry condition	Wet condition
			Epoxy Grout	>4.5kn	>3.6kn
			BS 5980:1980	0.95	0.56

PACKAGING OF RAINBOW SPARKLE SERIES

Kit	Filler	Resin	Hardener
5kg	3500gm	1000ml	500ml
1kg	700gm	200ml	100ml

PACKAGING OF LEXORA SERIES

Kit	Filler	Resin	Hardener
5kg	3500gm	1000ml	500ml
1kg	700gm	200ml	100ml



EPOXY

STAIN PROOF GROUT FOR
FLOOR & WALL | 100% Stain Free

01 LX - SNOW WHITE	15 LX - COFFEE BROWN	SPARKLE SILVER	SPARKLE GOLD	SPARKLE COPPER
02 LX - IVORY	16 LX - BURGUNDY	101 LX - SILVER JET BLACK	201 LX - GOLD JET BLACK	301 LX - COPPER JET BLACK
03 LX - JET BLACK	17 LX - MEADOW GREEN	102 LX - SILVER COFFEE BROWN	202 LX - GOLD COFFEE BROWN	302 LX - COPPER COFFEE BROWN
04 LX - LITE GREY	18 LX - CREAM	103 LX - SILVER STEEL GREY	203 LX - GOLD STEEL GREY	303 LX - STEEL GREY
05 LX - STEEL GREY	19 LX - BLUE	104 LX - SILVER SKY BLUE	204 LX - GOLD SKY BLUE	304 LX - GOLD SKY BLUE
06 LX - DARK GREY	20 LX - MAGENTA	105 LX - SILVER RED	205 LX - GOLD RED	305 LX - COPPER RED
07 LX - ANCHOR	21 LX - APRICOT	106 LX - SILVER MEADOW GREEN	206 LX - GOLD MEADOW GREEN	306 LX - COPPER MEADOW GREEN
08 LX - TERRACOTTA	22 LX - DENIM	107 LX - SILVER MAJESTIC SUNRISE	207 LX - GOLD MAJESTIC SUNRISE	307 LX - COPPER MAJESTIC SUNRISE
09 LX - R. BROWN	23 LX - DUST ROSE	108 LX - SILVER CREAM	208 LX - GOLD CREAM	308 LX - COPPER CREAM
10 LX - YELLOW	24 LX - NAVY BLUE	109 LX - SILVER TERRACOTTA	209 LX - GOLD TERRACOTTA	309 LX - COPPER TERRACOTTA
11 LX - SKY BLUE	25 LX - BRONZE	SPECIAL		
12 LX - BEIGE	26 LX - SEPIA	110 LX - LEXORA SILVER	210 LX - LEXORA GOLD	310 LX - LEXORA COPPER
13 LX - PEARL PINK	27 LX - MUSHROOM			
14 LX - MAJESTIC SUNRISE	28 LX - NATURAL GREY			



High Polymer Tile Grout



Tile Grout

One Pack Water Resistant
Tile Grout

PACKING

1 kg



PRODUCT DETAILS

LEXORA Tile Grout is a Premium fine polymer modified water resistant cement based powder grout use for various applications area.

SHELF LIFE & STORAGE

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

APPLICATION AREA

Glazed Wall tiles | Mosaic | Vitrified | full vitrified | Floor Tiles | Industrial Floor etc.

COLORS



White



Ivory



Grey



C. Brown



Magenta



R. Brown



Beige



Black



Jaisalmer



Terracotta



S. Blue



O.Green



Pink



Grout Admix



Grout Admix

For better strength of Grout

PACKING

200 ml



PRODUCT DETAILS

LEXORA Admix is specially designed Latex Admix to be used with Sanded & Unsanded Grout

SHELF LIFE & STORAGE

It improves the performance of Portland cement grouts for all type of ceramic tile, brick, marble, natural stone and agglomerate stone installations

COLORS

- Colour-fastness
- Flexibility
- Compressive strength
- Shock and chemical resistant
- Reduces water absorption
- Easy to clean

COVERAGE

Varies as per application



SBR LATEX



SBR LATEX

For Waterproofing & Repairs

PACKING

1 Ltr. | 5 Ltr.



APPLICATION AREA

For Enhances durability and lifespan of surfaces

PRODUCT DETAILS

SBR latex is a synthetic rubber emulsion that, when added to cement slurry, cement mortar, concrete, or grout, provides good adhesion and water resistance. It comes in the form of a milky liquid. It is fully soluble in water and is to be added directly to the gauging water of mortar, concrete, or cementitious grout.

Packing

1 Ltr. | 5 Ltr.

SHELF LIFE

LEXORA SBR latex has a shelf life of 12 months if kept in a dry, unopened condition.



LEXTITE(ARRODITE)



LEXTITE(ARRODITE)
H-304
weight-800gm

R-101
weight-1Kg.

For Strength in your construction

PACKING
1800 gm.

Master Cartoon - 8 set



LEXTITE

DESCRIPTION

LEXORA LEXTITE(ARRODITE) is a epoxy adhesive that possesses not just strong & durable bonds but is also resistant to water, heat, corrosion and most chemicals. It is suited for all types of applications across the Industrial and DIY sectors and is ideal for all the surfaces such as stone, metal, ceramic, glass, wood, rubber, etc.

SHELF LIFE

12 Months From Manufacturing Date

LEXTITE R-101

Packing - 1 Kg.

LEXTITE H-304

Packing - 800gm.



Tiles Cleaner



Tiles Cleaner

Powerful, Heavy Duty
Acid Based Cleaner

PACKING
1 Ltr. / 5 Ltr.



■ Description

A powerful, heavy duty, acid - based cleaner for ceramic tiled floors and walls. TILE CLEANER is designed for removal of cement film residues, efflorescence and most oxide stains. It may also be used as general purpose cleaner on other acid resistant surface.

Note: Do not use on surfaces that are not resistant to acid such as marble/terrazzo.


■ Benefits

- Powerful formula
- Fast acting
- Easy to apply
- Removes cement film
- Removes residues, efflorescence and most oxide stains

■ Use

TILE CLEANER is used for interior and exterior ceramic tiled floors and walls.

Tiles Accessories

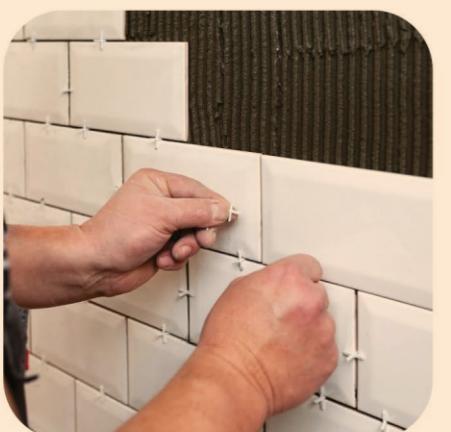

Tile Spacer

To Make Space Between Tiles.
Wall Tile, Floor Tiles, Etc...

Available Size :
2mm, 3mm, 4mm,
5mm, 6mm

Pack Size:
100 Pcs. / Pkt



TILES EQUALIZER (LEVLAR KIT)

Tiles Leveling And Equalizing Surface.

Available Size :
2mm, 3mm, 4mm, 5mm

Pack Size:
clip - 50 Pcs. / Pkt, Wedges - 50 Pcs. / Pkt



Tile Lifters



Tile Leveling Tool



Trowel

Lexora™

◆◆◆ CHEMBOND

Group of Company

LEX BOND™
Strength For Tiles

LARZEN
INDUSTRIES
Feel The Flow

LIPPO
TILES
आपका विकास, Our Confidence

Mfg. & Mktd.By:

LEXORA CHEMBOND LLP

Lalpar Ind. Estate-9, Near Solo Sanitary,
At.Lalpar, Morbi, Gujarat, INDIA.
Customer Care : +91-87584 34000 | 87584 35000
e: lexorachembond@gmail.com

