

Moisture Barrier Lamination





PolySurlyn Lamination

We Provide heat sealed 3-mil thick PolySurlyn Laminated Weather Protection Jacketing in accordance with EIL specifications and conforming to ASTM C1729. PolySurlyn Lamination acts as a brilliant moisture barrier and prevents corrosion on the inner surface of the cladding and onto the insulated surface.

Polykraft Lamination

We also provide Polykraft moisture barrier consisting of one layer of 1 mil high density polyethylene film with a protective layer of 40-pound minimum virgin Kraft paper heat laminated on the weather protection cladding inside our factory. This product complies with EIL specifications and provides excellent protection to the cladding material.

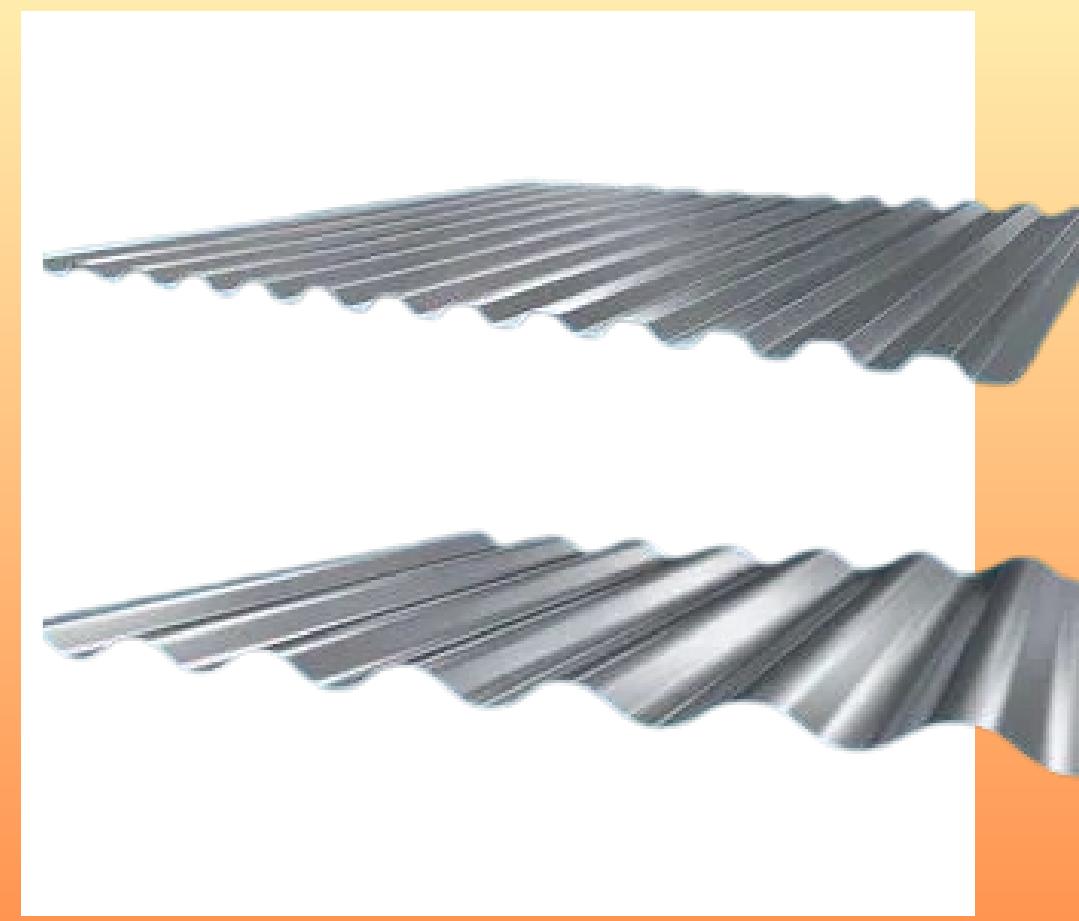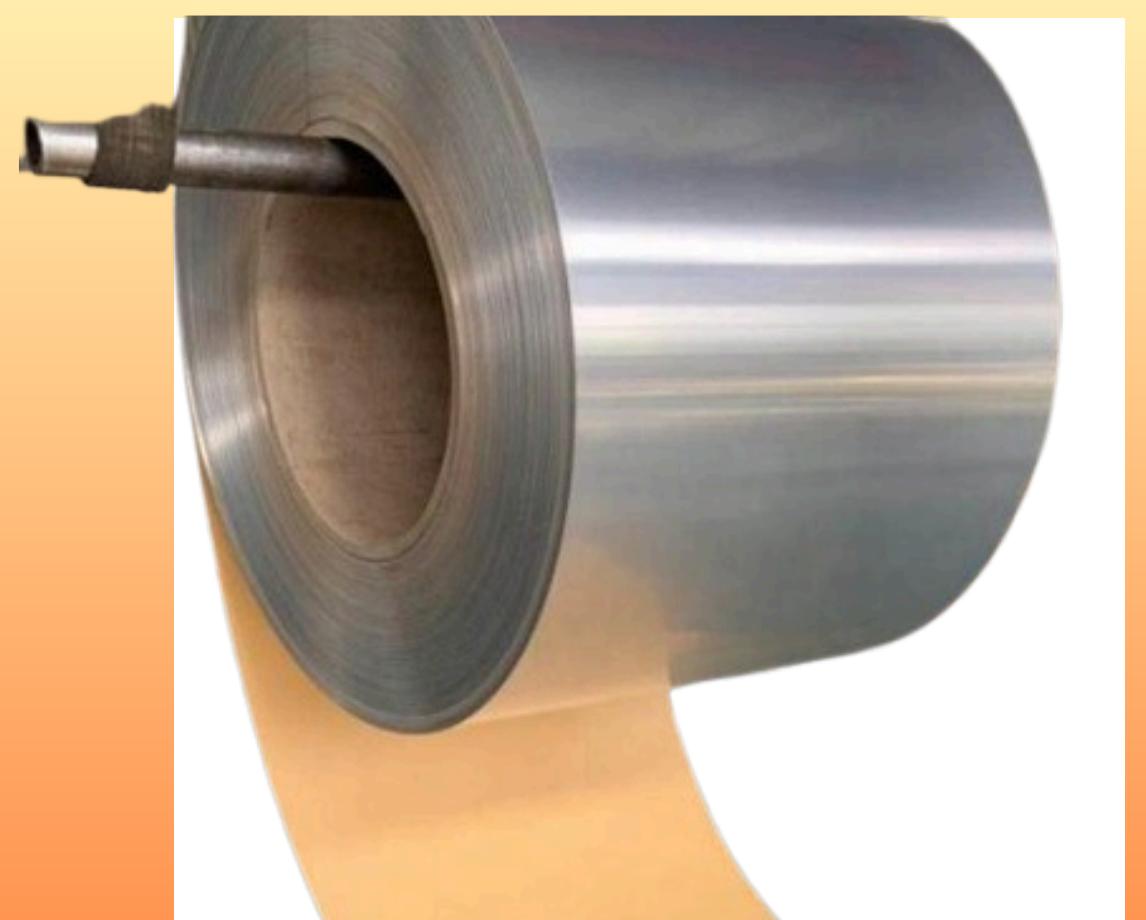

Profiled Weather Protection Jacketing

Our State-of-the-art facility can provide Corrugated Aluminium, SS & GI sheets with 32/5 & 76/19 profiles. Lengths of the corrugated material can be customised as per the customer's requirements. We are capable to do profiling on thicknesses varying from 0.4 mm to 1.22 mm depending upon the nature of the material. Profiled sheets are also available with moisture barrier protective laminations.

