


High Density PUF/PIR Supports

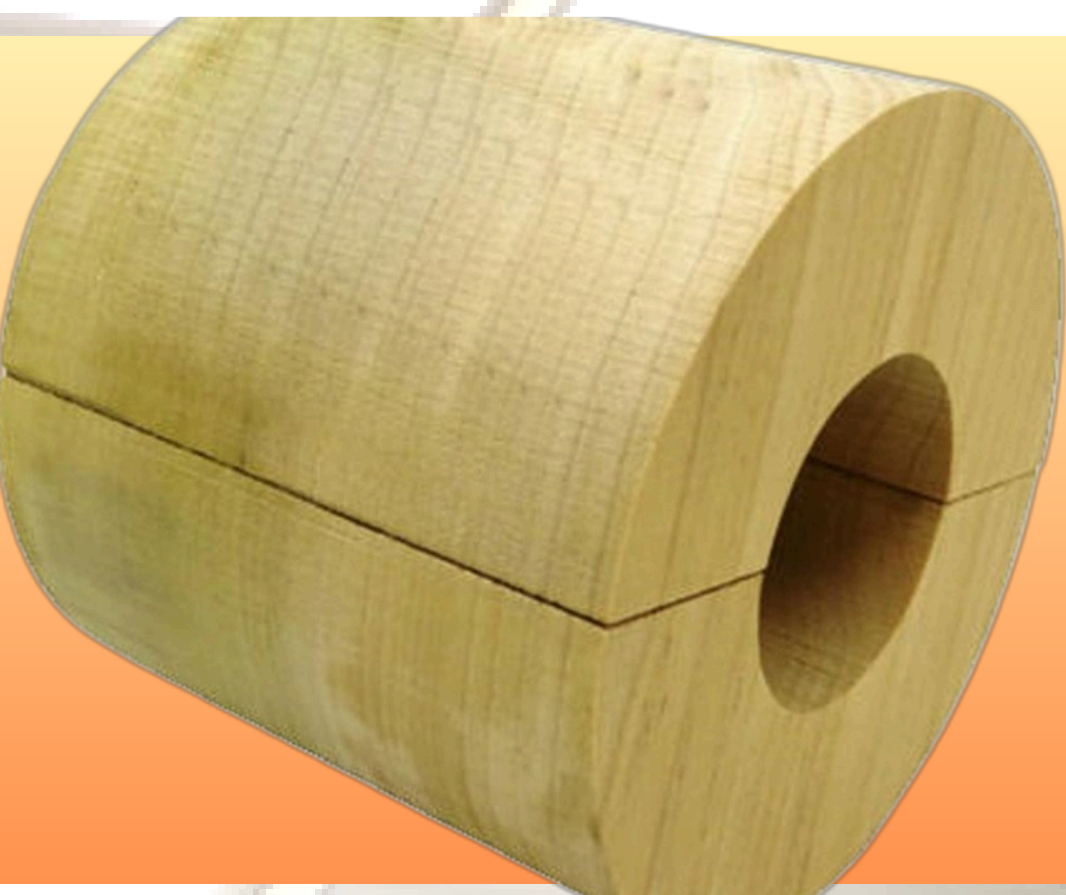

Shreeinsul offers a wide range of PUF supports. The density of PUF support ranges from 80 kg/m³ to 500 kg/m³. The higher density PUF supports can be made available against specific customer requirements. Shree Foam high density supports enable higher loads without increase in surface area. Shree Foam supports do not require sawing and shaping at site, the supports designed to suit exact pipe OD. Shree Foam supports are having excellent closed cell structure and it does not permit water / water vapour penetration.

Features

- Durable
- Pre-Fabricated and ready to use
- Sawing and shaping not required at site
- Available in various density and dimensions as per customer requirement
- Excellent Thermal conductivity
- CFC free chemical system
- Leak proof
- Temperature ranges from - 200°C to max +100°C
- Excellent dimensional density

Properties

Parameters	Standard reference	Standard Values	
Density (Kg/m ³)	ASTM D 1622 / IS 11239	240	320
Compressive Strength at 10% deformation (mpa) min	ASTM D 1621	3	6
Tensile Strength (mpa) min	ASTM D 1623	3	4.9
Thermal Conductivity at Mean Temp. -40°C (W/m ² K) Max.	ASTM C 177	0.034	0.04
Mean temp. -80°C (W/m ² K) Max.		0.031	0.04
Water Vapour permeability 23°C & 50% RH (g/m ² h) min	ASTM E 96	0.8	0.8
Water absorption (%) max	ASTM D 2842	5	5
Chloride content (ppm) max	ASTM C 871	60	60
Combustibility / Fire resistance FSI - max	ASTM E 84	25	25
pH value	ASTM C 871	6 - 7	6 - 7
Linear Co efficient of thermal expansion (max)	ASTM D 696	70 x 10 ⁻⁶	70 x 10 ⁻⁶
Close Cell Content (%),	ASTM D 6226	95	95