

Main Title

Sub-Title


A. Author

December 18, 2014

Colourful Sub-Title

- First bullet level.
 - Second bullet level.
 - Third bullet level.
- First bullet level again.

Frame With Figure

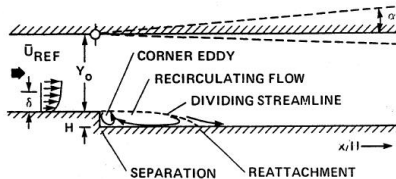

Typical Backward Facing Step Flow Configuration as an Example [Driver 1985]

- Important bullet point.

- Important bullet point.

Re-Attachment Lengths Predicted by DES Turbulence Models

Solver Type	Pressure-Velocity Coupling	Pressure Interpolation	Re-Attachment Length (m)
<i>Density Based</i>			0.091
<i>Pressure Based</i>	Simple	Standard	0.148
<i>Pressure Based</i>	Simple	Second Order	0.129
<i>Experimental</i>			$0.0795 \pm 1.27 \times 10^{-4}$ [Driver 1985]

Thank You For Your Attention!

Questions?

- [1] Driver, D., and Seegmiller, L., 1985, "Features of a Reattaching Turbulent Shear Layer in Divergent Channel Flow," *American Institute of Aeronautics and Astronautics*, **23**(2) pp. 163-171.

- Important backup slide point.