


Bill of Materials

WeighSoft

Project:	BOM_PartType For Variant [No Enclosure] of Project [scaleswifi.PrjPcb] (No PCB Document Sele
Variant:	No Enclosure
Creation Date:	12:15:22 PM
Print Date:	12:15:54 PM

Comment	Description	Designator	Quantity
ECHU1C101GX5	Panasonic 100pF +/-2% 16 V dc SMD Polyphenylene Sulphide Film Capacitor	C1, C6, C7, C10	4
C1608X5R0J225M080AB	TDK - C1608X5R0J225M080AB - CERAMIC CAPACITOR 2.2UF, 6.3V, X5R, 20%	C2, C3, C5	3
T494D107K010AT	Kemet 100uF Solid MnO2 Tantalum Capacitor, 10 V +/-10%, T494 Series	C4	1
LDBAB3100GC5N0	Capacitor Film SMT 0.1uF 16V 2% Capacitor Film SMT 0.1uF 16V 2%	C8, C9	2
CAP 4.7uF 16V 0805(2012)	CAP 4.7uF 16V ±10% 0805 (2012 Metric) Thickness 1.55mm SMD Low ESR, ESR < 1R	C11	1
CAP 100nF 16V 0603(1608)	CAP 100nF 16V ±10% 0603 (1608 Metric) Thickness 1mm SMD	C12	1
CAP 1uF 10V 0603(1608)	CAP 1uF 10V ±10% 0603 (1608 Metric) Thickness 1mm SMD	C13	1
CAP 10uF 16V 1210(3225)	CAP 10uF 16V ±5% 1210 (3225 Metric) Thickness 1.7mm SMD	C14, C15	2
CAP 100nF 50V 0603(1608)	CAP 100nF 50V ±10% 0603 (1608 Metric) Thickness 1mm SMD	C16, C22	2
CAP 10uF 25V 1206(3216)	CAP 10uF 25V ±10% 1206 (3216 Metric) Thickness 1.9mm SMD	C17	1
CAP 22uF 16V 1206(3216)	CAP 22uF 16V ±10% 1206 (3216 Metric) Thickness 1.9mm SMD	C18, C19	2
CAP 180nF 16V 0603(1608)	CAP 180nF 16V ±10% 0603 (1608 Metric) Thickness 1mm SMD	C20	1
GS2MF_R1_00001	Diode rectifier SMAF 1000V 2A	D1	1
SMBJ5.0A-E3/52	Vishay SMBJ5.0A-E3/52, Uni-Directional TVS Diode, 600W, 2-Pin DO-214AA	D2	1
CMS06	Diode, Schottky barrier rectifier	D3	1
NFM21PC105B1C3D	MURATA - NFM21PC105B1C3D - FILTER, SUPPRESSION, 0805, 1UF, 16VDC	FL1, FL2, FL3, FL8	4
YFF18AC1H101MT0Y0N	3-terminal filters, For automotive large-current power line	FL4, FL5, FL6, FL7	4
BMI-S-210-F	EMI Gaskets, Sheets, Absorbers & Shielding BLS,2PSH,FRM,SnSat,TnR	H1	1
BMI-S-210-C	RF Shield Cover 1.201" (30.50mm) X 1.732" (44.00mm) Vent Holes in Pattern Snap Fit	H2	1
1803316	Phoenix Contact MC Series, 3.81mm Pitch 6 Way 1 Row Right Angle PCB Header, Solder Termination, 8A	J1	1
1803293	4 way horizontal PCB header,3.81mm pitch Phoenix Contact MC Series, 3.81mm Pitch 4 Way 1 Row Right Angle PCB Header, Solder Termination, 8A	J2	1
SRN5040TA-2R2M	2.2µH Semi-Shielded Wirewound Inductor 3.8A 21mOhm	L1	1
TLMS1100-GS08	LED, RED, 2.1 V, -40 to 100 degC, 2-Pin SMD (0603), RoHS, Tape and Reel	LED1, LED2, LED3	3
100R 1% 0603(1608)	100R 0.1W 1% 0603 (1608 Metric) SMD	R1, R2	2
Jumper 0603(1608)	Jumper 0603 (1608 Metric)	R3, R5, R14	3
47K 5% 0603(1608)	47K 0.1W 5% 0603 (1608 Metric) SMD	R4	1
560R 5% 0603(1608)	560R 0.1W 5% 0603 (1608 Metric) SMD	R6, R7, R13	3
10K 5% 0603(1608)	10K 0.1W 5% 0603 (1608 Metric) SMD	R8	1
100R 5% 0603(1608)	100R 0.1W 5% 0603 (1608 Metric) SMD	R9, R10, R11, R12	4
100R 5% 0603(1608)	100R 0.1W 5% 0603 (1608 Metric) SMD	R15	1
39K 1%	39K 0.1W 1% 0603 (1608 Metric) SMD	R16	1
560R 1% 0603(1608)	560R 0.1W 1% 0603 (1608 Metric) SMD	R17	1
10K 1%	10K 0.1W 1% 0603 (1608 Metric) SMD	R19	1
140R 1% 0603(1608)	140R 0.1W 1% 0603 (1608 Metric) SMD	R20	1
10K 1% 0603(1608)	10K 0.1W 1% 0603 (1608 Metric) SMD	R21	1
1K6 1% 0603(1608)	1K6 0.1W 1% 0603 (1608 Metric) SMD	R22	1
TL3342F160QG	Switch, Tactile, SPST-NO, 50 mA, 12 V, 4-Pin SMD, RoHS, Tape and Reel	S1	1
61300411121	Connector Header Through Hole 4 position 0.100" (2.54mm)	SK1	1
61300211121	Connector Header Through Hole 2 position 0.100" (2.54mm)	SK2, SK3	2
ADS1231IDR	24-Bit, 80SPS, 1-Ch Delta-Sigma ADC for Resistive Bridge Sensors & Weigh Scales	U1	1
ESP32-WROOM-32U	Wi-Fi/BT BLE Module ESP32-D0WD SPI Flash UART U.FL Conn.	U2	1
AZ1117H-3.3TRE1	IC REG LINEAR 3.3V 1A SOT223	U3	1
LM27342SD/NOPB	Regulator, 2.5A Wide input range step down dc-dc regulator with frequency synchronization	U4	1

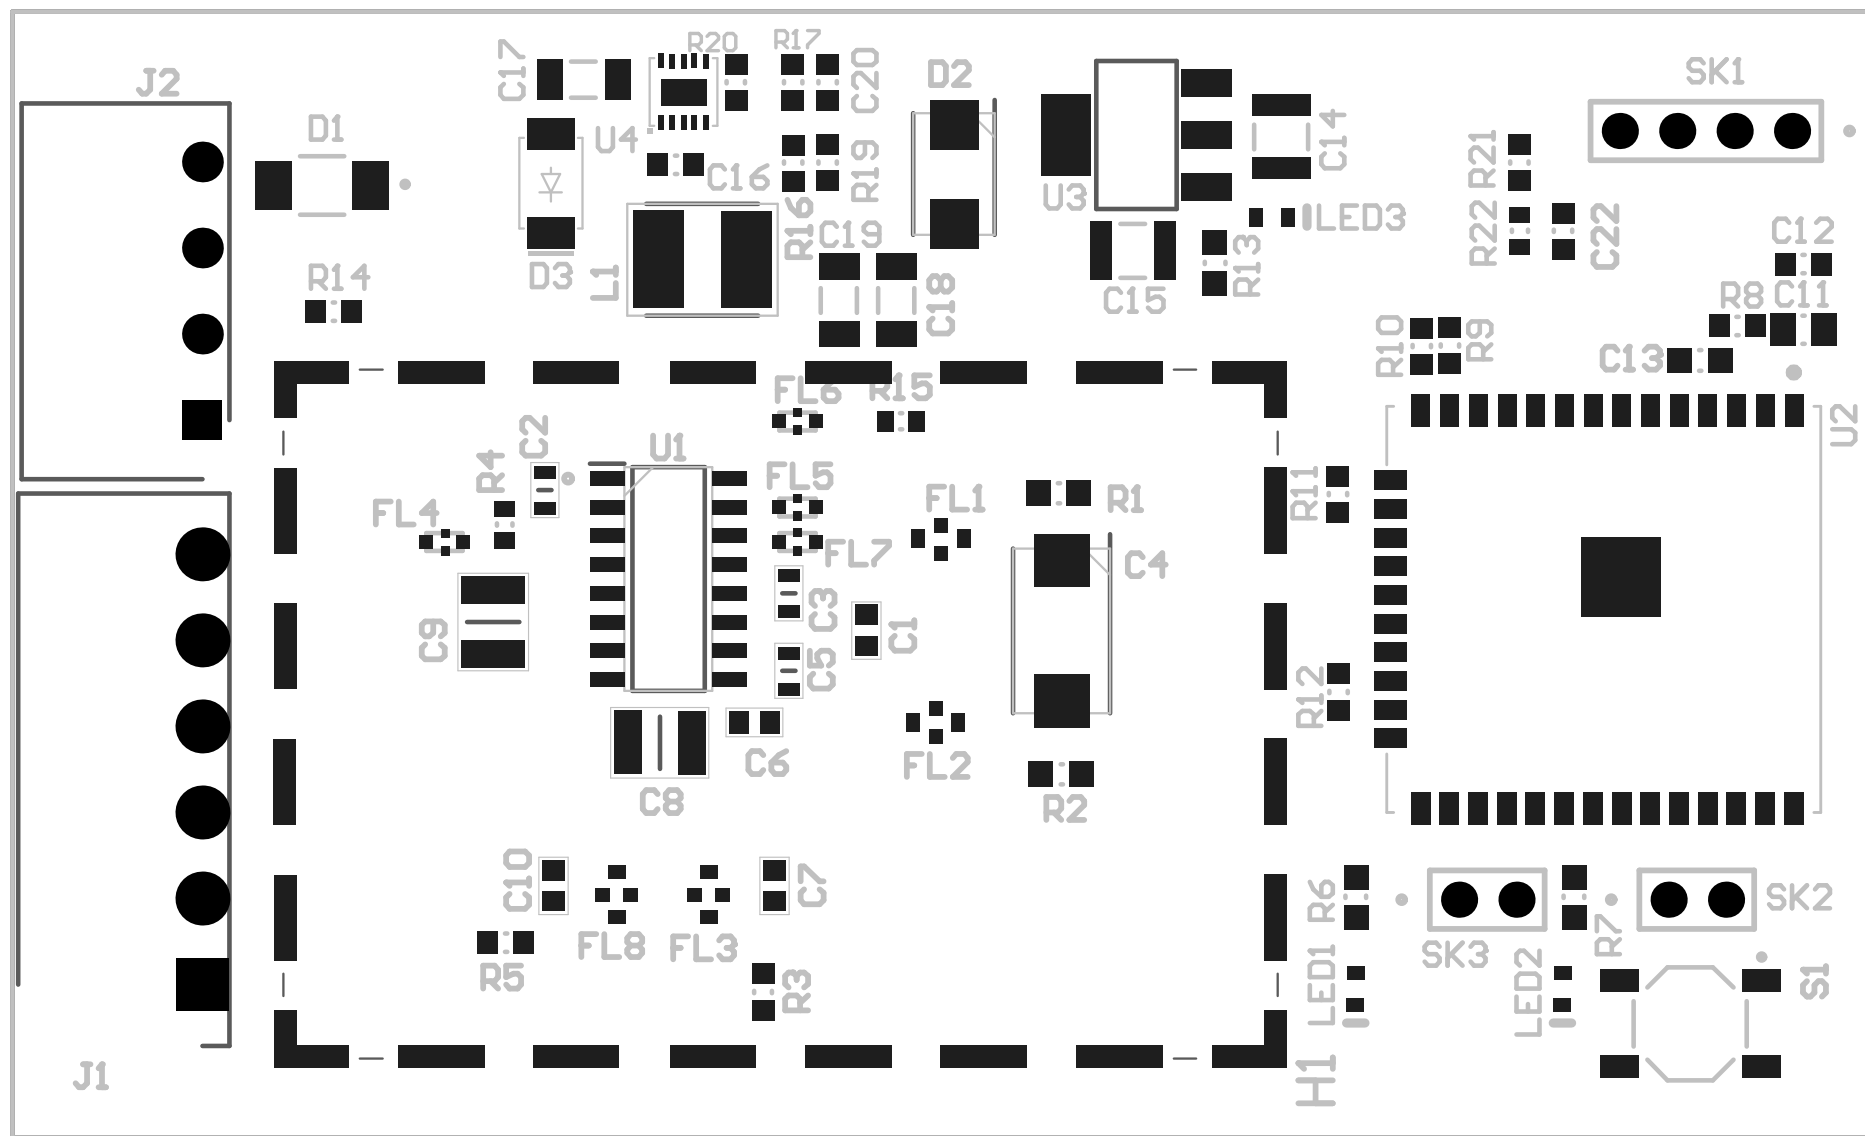

Scale With Remote V1.0 **END**

+12V

-EXC

-SIN

-EIN

+EIN

+SIN

+EXC

Now29162

Scale With Remote V1.0 **END**

+12V

-EXC

-SIN

-SIG

+SIG

+SIN

+EXC

Wow29162

Scale With Remote V1.0 **END**

+12V

-EXC

-SIN

-EIS

+EIS

+SIN

+EXC

Wow29162