



Our Hollow Metal Pressed Steel Doors are engineered for exceptional performance in demanding environments. Fabricated from high-quality galvanized iron (GI) sheets, these doors offer superior robustness, corrosion resistance, and long-term durability, making them an ideal choice for high-traffic and high-security areas.

Key Features

- Constructed from Galvanized Iron Sheets – Ensures strength and long-lasting structural integrity.
- Pressed Steel Design – Provides a clean, modern look with enhanced rigidity.
- Corrosion Resistant Finish – Suitable for both indoor and semi-exposed installations.
- Customizable Sizes & Finishes – Available to meet your project's exact specifications



Applications


Ideal for use in a wide range of professional settings, including:

- Industrial Buildings
- Commercial Projects
- Hospitals & Healthcare Facilities
- Hotels & Hospitality Sectors

Technical Specification

- Door shutter MOC: 0.80~1.0 mm GI sheet.
- Shutter thickness: 46 mm.
- Infill Insulation: Resin bonded honey-comb core.
- Pad plates: 3 mm predrilled and taped.
- Door frame profiles: 55x57, 80x57, 100x57, 125x57 or 143x57
- Rabbits: Single rabbit or double rabbit.
- Door frame MOC: 1.2 mm GI sheets.
- Finish: Pure polyester powder coating finish.


Door Frame Variant

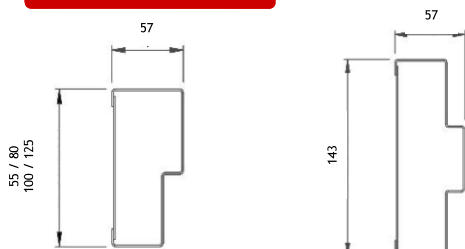


Single rabbit frame

Double rabbit frame

Door Construction

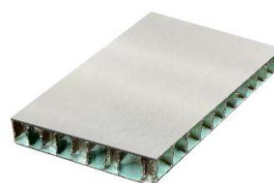

Infill Material
Honeycomb

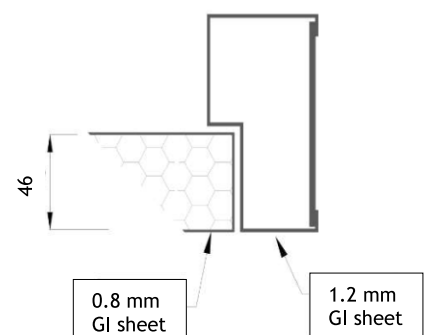

Door Hardware



S.S. BB Hinges



Mortice Dead lock



Door Handle



Door Closer



Vision lite




Flush Bolt



Mortice sash lock & Lever Handle




Louvers




Drop bottom seal

Optional Hardware


Vision lite options



No View Glass



Rectangular view glass
200x300 mm



Square view glass
300x300 mm



Narrow view glass
150x600 mm

Colour Shades



RAL8017



RAL7011




RAL7037



RAL7040



RAL7047



RAL9001



RAL9016

Our Fire-Resistant Steel Doors are designed to offer reliable protection and durability in fire-sensitive environments. Constructed from high-grade steel, these doors provide a robust barrier against fire and heat, helping to contain fire spread and protect lives and property.

With certified fire ratings, these doors are ideal for both life safety and property protection in a wide range of commercial, industrial, and institutional setting

Key Features

- Fire Resistance up to 2 Hours – Tested and certified for performance in high-temperature conditions.
- High-Strength Steel Construction – Withstands warping, cracking, and other fire-related damage.
- Customizable Finish & Sizes – Available in a variety of powder-coated finishes and configurations.
- Thermal & Acoustic Insulation Options – For enhanced comfort and safety.



Applications


- Office buildings
- Shopping malls
- Warehouses
- Hospitals & medical facilities
- Schools & universities
- Residential apartments

Technical Specification


- Door shutter MOC: 1.2 mm GI sheet.
- Shutter thickness: 46 mm
- Infill Insulation: Rockwool 96 kg / cc
- Pad plates: 3 mm predrilled and taped.
- Door frame profiles: 100x57, 125x57 or 143x57
- Rabbets: Single rabbet or double rabbet.
- Door frame MOC: 1.5 mm GI sheets.
- Finish: Pure polyester powder coating finish.



Door Frame Variant



Single rabbet frame

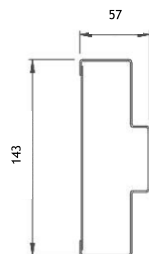


Double rabbet frame

Door Construction



Infill Insulation
Rock wool

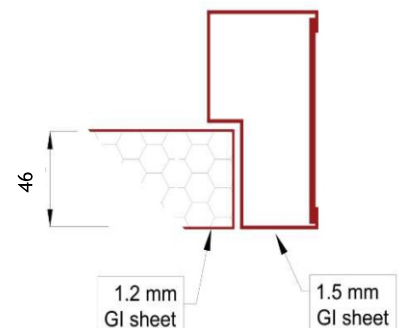

1.2 mm
GI sheet

1.5 mm
GI sheet

Door Hardware



S.S. BB Hinges



Mortice Dead lock



Door Handle



Door Closer



Intumescent Seal



Vision lite



Flush Bolt

Vision lite options



No View Glass



Standard view glass
200x300 mm



Square view glass
300x300 mm



Narrow view glass
150x600 mm

Colour Shades



RAL3020



RAL7011



RAL7037



RAL7040



RAL7047



RAL9001



RAL9016

Our Emergency Exit Fire Door is engineered to provide maximum safety, durability, and functionality in critical situations. Made with high-quality hollow metal steel, this door is your first line of defence in emergencies.

Key Features

- 2-Hour Fire Resistance Rating – Certified protection against fire spread for up to 2 hours.
- Durable Hollow Metal Construction – Built to withstand heat, pressure, and frequent usage.
- Advanced Exit Hardware: Panic Bars for rapid egress
- Trim Locks for secure access control
- Heavy-Duty Door Closers to ensure smooth, reliable closing
- Optional View Panels – Tempered fire-rated glass for visibility without compromising safety.



Applications


- Ideal for installation in
- Commercial buildings
- Hospitals & healthcare facilities
- Educational institutions
- Industrial plants
- High-rise residential complexes

Technical Specification


- Door shutter MOC: 1.2 mm GI sheet.
- Shutter thickness: 46 mm
- Infill Insulation: Rockwool 96 kg / cc
- Pad plates: 3 mm predrilled and taped.
- Door frame profiles: 100x57, 125x57 or 143x57
- Rabbets: Single rabbet or double rabbet.
- Door frame MOC: 1.5 mm GI sheets.
- Finish: Pure polyester powder coating finish.



Door Frame Variant



Single rabbet frame




Double rabbet frame

Door Construction



Infill Insulation
Rock wool

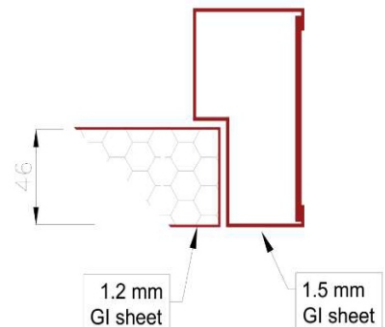

Door Hardware



S.S. BB Hinges



Panic exit devices



Trim lock



Door Closer



Intumescent Seal



Vision lite


Vision lite options



No View Glass



Standard view glass
200x300 mm




Square view glass
300x300 mm



Narrow view glass
150x600 mm

Colour Shades



RAL3020



RAL7011



RAL7037




RAL7040



RAL7047



RAL9001



RAL9016

HMPS Sliding Fire-Resistant Doors are specially designed for areas that demand high-performance fire protection without compromising on space efficiency or operational ease. Ideal for industrial, commercial, and institutional settings, these doors offer both safety and convenience where every second counts



Key Features

- **Certified Fire Resistance:** Tested and certified for fire ratings of up to 120 minutes.
- **Space-Saving Design:** Sliding mechanism allows for efficient use of space, perfect for wide openings.
- **Heavy-Duty Construction:** Manufactured with high-grade HMPS (hollow metal pressed steel) for maximum durability.
- **Smooth Sliding System:** Precision tracks and rollers ensure effortless and quiet operation.
- **Automatic & Manual Options:** Available with motorized or manual systems based on application needs.
- **Fail-Safe Mechanism:** Integrated counterweight or fusible link systems ensure door closure during fire.
- **Custom Finishes:** Supplied in powder-coated, primed, or stainless-steel finishes to match your aesthetic.


Technical Specification

- Door shutter MOC: 1.2 mm GI sheet,
- Shutter thickness: 46 mm
- Infill Insulation: Rockwool 96 kg / cc
- Borderframe: 50x50x3 mm C type, all four sides.
- Top rail: 3 mm, C type track at top.
- Wall mounting: Zinc coated MS brackets & spacers.
- Top cover: made of 0.8 mm GI sheet
- Side covers: 1.2 mm GI sheet, C profile.

Applications

- Warehouses & Industrial Plants
- Hospitals & Healthcare Facilities
- Commercial Complexes & Malls
- Airports & Transport Terminals
- Data Centers
- Basement Car Parks
- High-Risk Zones Requiring Compartmentalization

These doors are ideal for protecting large openings while ensuring quick isolation of fire zones, helping reduce the spread of fire, smoke, and toxic gases.

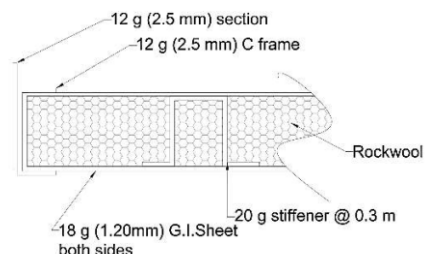

Door Hardware




Top guide track



Track Holder
Bracket




Hanger roller
Assembly



Door bottom Guide



Floor lock



Vision lite



Door Handle

Vision lite options



No View Glass



Standard view glass
200x300 mm



Square view glass
300x300 mm



Narrow view glass
150x600 mm

Colour Shades




RAL3020



RAL7011



RAL7037



RAL7040



RAL7047



RAL9001



RAL9016

Our Clean Room Doors, crafted from high-quality galvanized iron (GI) sheets, are specially designed to meet the rigorous standards of sterile and controlled environments. These hollow metal steel doors are engineered for clean room applications, offering airtight sealing, anti-bacterial properties, and dust-proof performance—ensuring uncompromised hygiene and safety.

Key Features

- Clean Room Compatible – Designed to maintain strict environmental controls.
- Anti-Corrosive Construction – Long-lasting performance in sterile and moisture-prone areas.
- Dust-Proof & Airtight Design – Prevents contamination and supports controlled air pressure zones.
- Anti-Bacterial Surface Finish – Helps reduce microbial growth and maintain hygiene.



Applications


Perfectly suited for sterile and hygiene-sensitive environments such as:

- Pharmaceutical Facilities
- Hospitals & Healthcare Units
- Laboratories & Research Centers
- Food Processing Plants
- Dairy and Beverage Industry

Technical Specification

- Door shutter MOC: 0.80~1.0 mm GI sheet.
- Shutter thickness: 46 mm.
- Infill Insulation: Resin bonded honey-comb core.
- Pad plates: 3 mm predrilled and taped.
- Door frame profiles: 55x57, 80x57, 100x57
- Rabbits: Single rabbet.
- Door frame MOC: 1.2 mm GI sheets.
- Finish: Pure polyester powder coating finish.

Door Frame Variant



Single rabbet frame


Door Construction



Infill Material
Polyurethane foam



Infill Material
Honeycomb

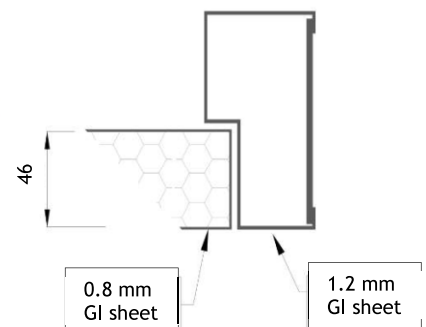

0.8 mm
GI sheet

1.2 mm
GI sheet

Door Hardware



S.S. BB Hinges




Mortice Dead lock



Door Handle



Door Closer




Vision lite



Flush Bolt



Drop bottom seal




Perimeter seal




Optional Hardware

Mortice sash lock & Lever Handle

Vision lite options

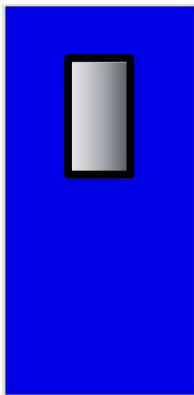

Standard View Glass
300x600 DGU

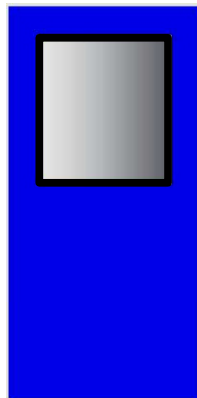

Half Glazed
150 shutters

Colour Shades



RAL7037



RAL7040



RAL7047



RAL5002



RAL5015




RAL5012



RAL5002



RAL9001



RAL9016

Engineered for Hygiene. Designed for Performance.

Our GI Sheet Clean Room Doors ensure your critical spaces remain safe, sterile, and sealed—every time. Contact us for technical details, customization, and installation support.

Our Lead-Lined Doors are specifically engineered for medical environments where radiation shielding is critical. These doors are internally lined with high-quality lead sheets, offering superior protection against radiation leakage while maintaining a sleek, hygienic exterior suitable for hospital settings.


Each door is constructed with precision to meet stringent radiation safety standards and ensure compliance with healthcare regulations.

Key Features


- **Integrated Lead Core** – Available in various thicknesses (typically 2 mm) as per shielding requirements.
- **Seamless Finish** – Wrapped in powder-coated or stainless-steel sheeting for easy cleaning and sterile environments.
- **Radiation Shielding Compliance** – Designed to meet national and international X-ray shielding standards.
- **Optional Lead-Lined Vision Panels** – Equipped with X-ray-safe glass for clear visibility without compromising protection.
- **Durable Hardware Options** – Compatible with heavy-duty hinges, lead-lined door frames, and automatic door closers.



Door Construction



Door Frame Variant




Technical Specifications

- Door shutter MOC: 0.80~1.0 mm GI sheet.
- Shutter thickness: 46 mm.
- Infill Insulation: Rock wool insulation.
- Pad plates: 3 mm predrilled and taped.
- Door frame profiles: 55x57, 80x57, 100x57 or 125.
- Rabbets: Single rabbet, "Z" profile.
- Door frame MOC: 1.2 mm GI sheets.
- Finish: Pure polyester powder coating finish.

Door Hardware



Optional Hardware



Our Lead Glass Observation Window is specially designed to provide effective radiation protection in diagnostic imaging environments such as CT scan and X-ray rooms. The window features an 8 mm thick lead glass panel, equivalent to 2mm lead shielding, ensuring safety without compromising visibility.

Framed in a sturdy HMPS (Hollow Metal Pressed Steel) structure, the unit offers durability, easy installation, and compliance with healthcare radiation shielding standards.

Key Features

- **High-Quality Lead Glass:** 8mm thick, radiation-shielding equivalent to 2mm lead
- **Clear Visibility:** Provides excellent visual clarity for monitoring procedures
- **HMPS Frame:** Robust, powder-coated frame for long-lasting performance
- **Easy Integration:** Designed for seamless installation in partition walls
- **Radiation Safety Compliant:** Meets standard protection requirements for diagnostic rooms
- **Custom Sizes Available:** Tailored dimensions available for specific room requirements.

Applications

Ideal for areas requiring radiation shielding in:

- Hospitals and Clinics
- Diagnostic Imaging Rooms (X-ray, CT, MRI)
- Radiology & Nuclear Medicine Departments
- Dental Clinics
- Research Laboratories



Colour Shades



RAL7037



RAL7040



RAL7047



RAL5002



RAL5015




RAL5012



RAL5002



RAL9001



RAL9016

Engineered for safety and designed for performance, our Lead Line Doors and Lead Glass Window with HMPS frame is the ideal choice for healthcare environments requiring reliable radiation shielding and clear observation

Why Choose HMPS Shaft Doors?

At HMPS, we understand that safety and durability are critical in high-rise and commercial buildings. Our shaft doors are engineered with precision to provide reliable access to service shafts while maintaining the highest safety and fire resistance standards.

Whether you're designing new infrastructure or retrofitting an existing one, HMPS Shaft Doors are the trusted solution.

Key Features

- **Robust Construction:** Made from high-quality galvanized or stainless steel for long-lasting performance.
- **Fire-Rated Options:** Available with certified fire resistance ratings as per national and international standards.
- **Custom Sizes:** Manufactured to suit various shaft openings and dimensions.
- **Smooth Operation:** Equipped with high-performance hinges and locking mechanisms.
- **Aesthetic Finishes:** Powder-coated or painted finishes to match your interior style.
- **Safety Locks:** Optional locking systems to prevent unauthorized access.
- **Weather & Corrosion Resistant:** Ideal for both indoor and outdoor applications.



Applications


- HVAC Shafts
- Electrical & Plumbing Risers
- Firefighting Shafts
- Maintenance & Service Shafts
- Utility Access Points
- High-rise Residential & Commercial Buildings
- Hospitals, Malls, Airports, and Industrial Facilities

Technical Specification

- Door shutter MOC: 0.8 / 1.2 mm GI sheet.
- Shutter thickness: 46 mm
- Infill Insulation: Honeycomb or Rockwool 96 kg / cc
- Pad plates: 3 mm predrilled and taped.
- Door frame profiles: 80x57, 100x57, 125x57
- Rabbits: Single rabbit.
- Door frame MOC: 1.2- or 1.5-mm GI sheets.
- Finish: Pure polyester powder coating finish.



Door Frame Variant



Single rabbit frame


Door Construction



Infill Material
Honeycomb



Infill Insulation
Rock wool

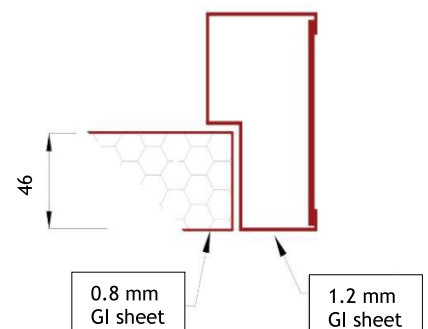

Door Hardware



S.S. BB Hinges



LN key lock




Concealed Door Handle



Flush Bolt

Optional Hardware



Intumescent Seal



Louvers




Vision lite


Door options



Plain Door
(P)

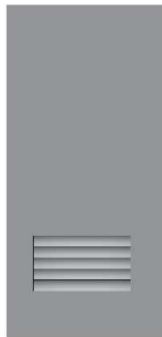

With Louvers
(L)

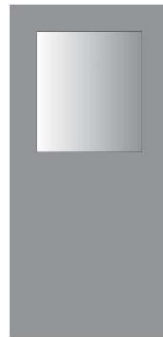

With Louvers
& View Glass
(G)



With Louvers
& View Glass
(LG)

Colour Shades



RAL3020



RAL7011




RAL7037




RAL7040



RAL7047



RAL9001



RAL9016

Precision-Engineered for Silence and Strength

In today's demanding environments where noise control and privacy are paramount, our Acoustic Steel Doors (STC 48 Rated) offer the perfect solution. Designed with advanced sound insulation technology, these doors combine high acoustic performance with robust security and aesthetic appeal. Whether used in commercial, industrial, or specialized settings, they provide the ideal balance of functionality, durability, and custom design—ensuring peace of mind and sound control in every application.

Key Features


- **STC 48 Sound Rating:** Engineered for high-level sound insulation, effectively blocking noise transmission between rooms.
- **Premium Acoustic Seals:** Multi-layer perimeter seals and drop bottom seal ensure optimal sound attenuation and air tightness.
- **Durable Steel Construction:** Heavy-duty steel sheets with reinforced core designed for long-lasting performance and structural integrity.
- **Powder Coated Finish:** Durable, corrosion-resistant, and available in a range of colors to match any interior or exterior design.
- **Integrated Dead Lock & Handle Sets:** Secure locking system with robust hardware for safety and ease of use.
- **View Glass Options:** Acoustically rated vision panels available for visibility without compromising soundproofing.
- **Door Closer:** Smooth, controlled closure every time for convenience and added acoustic efficiency.




Technical Specification

- Door shutter MOC: 0.80~1.0 mm GI sheet.
- Shutter thickness: 46 mm.
- Infill Insulation: Proprietary acoustic material.
- Pad plates: 3 mm predrilled and taped.
- Door frame profiles: 80x57, 100x57, 125x57
- Rabbets: Single rabbet.
- Door frame MOC: 1.2 mm GI sheets.
- Finish: Pure polyester powder coating finish.



Door Frame Variant

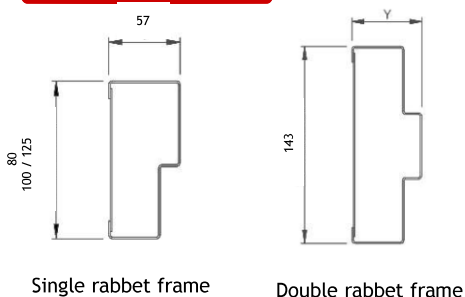

Door Construction

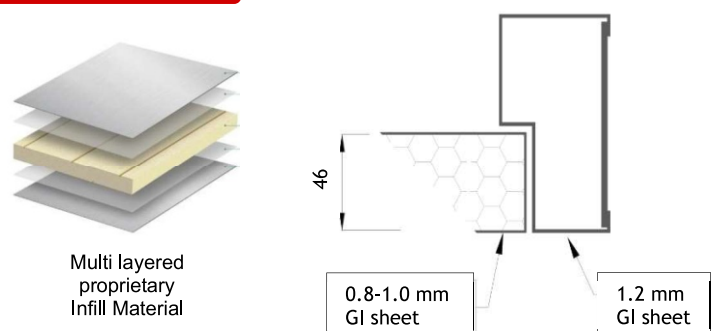

Door Hardware

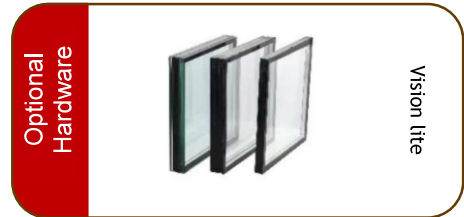

Applications

Ideal for blocking external noise and maintaining interior acoustic quality.

- Corporate Offices & Conference Rooms
Ensures speech privacy for confidential meetings and conversations.
- Theaters, Auditoriums, and Performance Venues
Keeps sound contained while preventing external disturbances.
- Hospitals & Laboratories
Reduces noise for better concentration, recovery, and productivity.
- Hotels & Residential Buildings
Enhances occupant comfort and privacy in high-traffic or noisy environments.

Colour Shades



RAL7037



RAL7040



RAL7047



RAL5002



RAL5015




RAL5012



RAL5002



RAL9001



RAL9016

Why Choose Our Acoustic Steel Doors?

Tested and rated to ASTM standards for acoustic performance

Expert design for form and function

Enhanced privacy, security, and peace of mind

Complete customization to fit project-specific requirements



Our Automatic Sliding Gate is engineered using high-quality MS (Mild Steel) tubes, ensuring exceptional strength, durability, and longevity. It is coated with anti-corrosive primer and finished with high-grade paint, making it suitable for all weather conditions.

Key Features

- **Heavy-Duty Construction:** Fabricated with precision from MS tubes for unmatched strength and stability.
- **Smooth Sliding Mechanism:** Ensures quiet and effortless operation, minimizing wear and tear.
- **Dual Operation Modes:**
 - Remote Controlled: Convenient access with a push of a button.
 - Manual Switch: Reliable and easy-to-use alternative operation.
- **Weather-Resistant Finish:** Protective primer and high-quality paint ensure long-term resistance to rust and fading.
- **Safety Sensors:** Enhance safety with automatic obstruction detection.
- **Customizable Design:** Gates can be tailored to match your architectural style and size requirements.


Applications

- Industrial Plants & Warehouses
- Schools & Institutions
- Hospitals & Healthcare Facilities
- Commercial Buildings
- Residential societies & Bungalows

Why Choose Us?

- Expert craftsmanship and durable materials
- Seamless automation and user-friendly operation
- Custom solutions tailored to your space
- Reliable after-sales support and service


Design Options

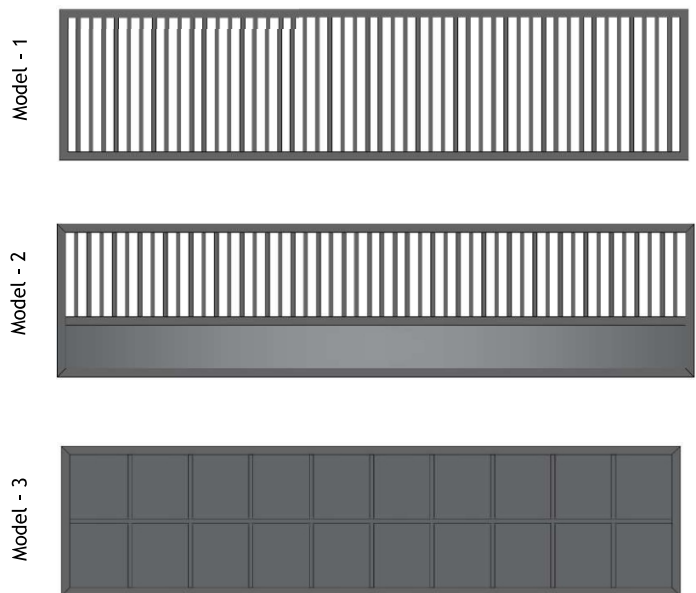


Gate Post, wheel & Track



Gate Track



Wall Mounted Gate Post



Floor Mounted Gate Post



Bottom Wheel
3" / 4" / 5"




Nylone Guide
2" / 3"



Key Features

- Operates on remote/ switch, it's possible to operate this system with almost any access control system (RFID, Biometric etc.)
- Flashing lamp for notification of gate in motion.
- Auto closing of gate with delay time adjustment.
- It can be operated on selected model of UPS / Inverters.
- Photocell sensors for automatic return incase of obstacles while closing.
- Manual opening of gate incases of power failure.
- Optional feature – wireless keypad to operated gate with password.
- Automatically lock the gate and can be only operated with remotes / switch / keys in case of manual operation.
- Pedestrian open in selected models.
- Slow start / stop in selected models.

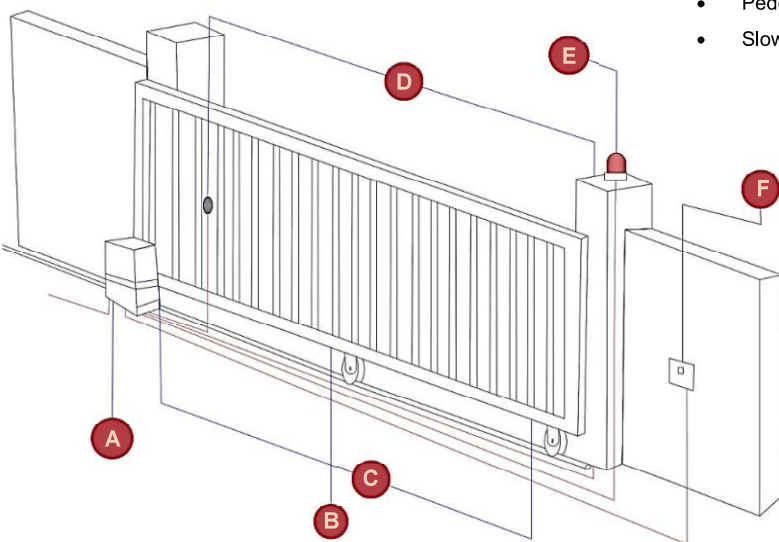

- A** Sliding Gate Opener
- B** Galvanized Steel Rack
- C** Limit Switch
- D** Infrared Photocell
- E** Warning Light
- F** Push Button Switch

Gate Opener Models & Technical Details

TYPE / MODEL	SD1006	SD1010	SD1015	SD1020	SD1030	SD1050
Max. Gate Weight Capacity	600 kg	1000 kg	1500 kg	2000 kg	3000 kg	5000 kg
Power Supply	220V, 50Hz	220V, 50Hz	220V, 50Hz	380V, 50Hz	380V, 50Hz	380V, 50Hz
Motor Speed	55 RPM	50 RPM	42 RPM	42 RPM	52 RPM	42 RPM
Rated Output Power of Motor	200 W	350 W	500 W	750 W	1000 W	1000 W
Remote Control Range	30 m	30 m	30 m	30 m	30 m	30 m
Remote Control Mode	Single button	Single button	Single button	Three buttons	Three buttons	Three buttons
Output Shaft Height	58.5 mm	58.5 mm	58.5 mm	58.5 mm	58.5 mm	58.5 mm
Output Torque	16 N*m	25 N*m	32 N*m	45 N*m	55 N*m	85 N*m
Limit Switch	Magnetic	Magnetic	Magnetic	Magnetic	Magnetic	Magnetic
Noise	< 58 dB	< 58 dB	< 60 dB	< 60 dB	< 60 dB	< 60 dB
Duty Cycle	S2, 15 Min.	S2, 15 Min.	S2, 15 Min.	S2, 15 Min.	S2, 15 Min.	S2, 25 Min.
Extra Remote-Control Support	25	25	25	25	25	25
Environmental Temperature	(-)20°C to (+)50°C	(-)20°C to (+)50°C	(-)20°C to (+)50°C	(-)20°C to (+)50°C	(-)20°C to (+)50°C	(-)20°C to (+)50°C
Gate Operation Speed	13 m/min	12 m/min	12 m/min	12 m/min	12 m/min	12 m/min



Doorwin Engineering proudly offers premium-quality **Swing Type Main Gates**, combining durability, security, and style. Our gates are custom engineered using high-grade materials and modern manufacturing techniques to ensure long-lasting performance in all weather conditions.

Key Features

- **Robust Construction:** Fabricated using MS square tubes, ISMC sections, and MS sheets for superior strength and stability.
- **Smooth Operation:** Fitted with ball bearing pivots or ball bearing hinges for seamless, low friction swinging action.
- **Manual & Automatic Options:** Available in both manual operation and fully automated systems.
- **Superior Surface Finish:** High-performance spray-painted coating ensures corrosion resistance and an attractive, uniform finish.
- **All-Weather Reliability:** Designed to perform in harsh weather conditions—sun, rain, or snow.
- **Aesthetic Appeal:** Tailored to your style needs with a modern and elegant appearance that enhances your property's frontage.
- **State-of-the-Art Manufacturing:** Produced in our advanced manufacturing facility with stringent quality control at every stage.

Applications


- Industrial Plants & Warehouses
- Schools & Institutions
- Hospitals & Healthcare Facilities
- Commercial Buildings
- Residencial societies & Farmhouse

Why Choose Us?


- ✓ Over a decade of expertise
- ✓ Custom design & fabrication
- ✓ End-to-end support: consultation to installation
- ✓ Durable, reliable, and stylish solutions

Design Options


Model - 1

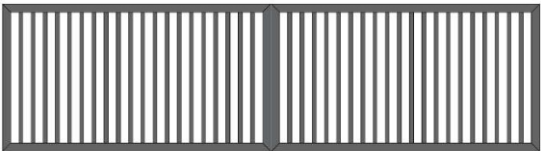

Model - 2

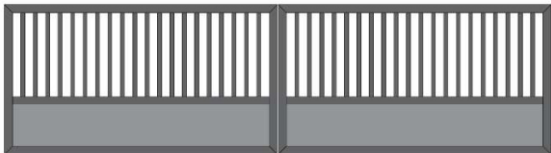

Model - 3

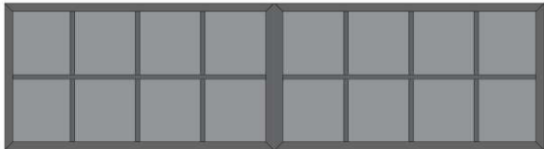

Accessories



Pivot Set (Ball Bearing)



Hing Set (Ball Bearing)


Motor Kit



Key Features


- Open & close single OR both the gate at a time.
- Can be Integrated with Access Control Systems (RFID, Biometric).
- Up to 50 remotes can be paired.
- Safety: 12V DC motor, eliminates danger of electric shock hazard.
- Overload sensors provide instant stop upon contact with obstacles.
- Rechargeable battery backup, 42 hrs. / 30~50 cycle gate operation in case of power failure.
- Soft start & stop.
- The motor positioned above ground level eliminates water damages.
- It Provides multiple mounting choices like swing in / swing out.
- Weather resistant housing (IP 54 Protection)

Dimension Guide to Construct a Swing Gate

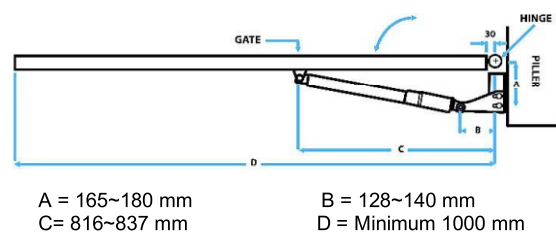

- A** Control Box **C** Motor - 1
B Post Light Control **D** Motor - 2

OPTIONAL ACCESSORIES

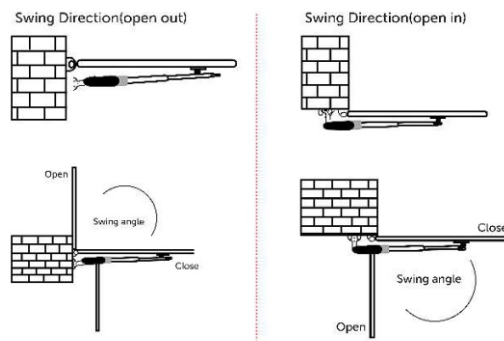

Gate Opener Models & Technical Details

PARAMETERS / MODELS	SS2003	SS2005	SS2007	SS2009
Max. Gate Weight Capacity	150 kg per wing	250 kg per wing	350 kg per wing	450 kg per wing
Max. Gate Width Capacity	3.0 m per wing	4.0 m per wing	5.0 m per wing	6.0 m per wing
Driving Method	Electro-mechanical	Electro-mechanical	Electro-mechanical	Electro-mechanical
Operating Voltage	DC 18V	DC 18V	DC 24V	DC 24V
Motor Output	12 W	18 W	30 W	30 W
Opening Speed	90 deg. In 10~12 sec.	90 deg. In 10~12 sec.	90 deg. In 10~12 sec.	90 deg. In 10~12 sec.
Battery Back up	12 Volt, 7 AH	12 Volt, 7 AH	N.A.	N.A.
Manual Operation	Special Key Release	Special Key Release	Special Key Release	Special Key Release
Safety Clutch	Hi -AMP auto stop	Hi -AMP auto stop	Hi -AMP auto stop	Hi -AMP auto stop
Environmental Temperature	0°C to +50°C	0°C to +50°C	0°C to +50°C	0°C to +50°C

Our Fire-Resistant Steel Windows offer robust protection with a sleek, industrial aesthetic. Fabricated from high-quality hollow metal pressed steel and paired with 2-hour fire-rated glass, these windows are available in openable and fixed configurations, delivering both safety and functionality for high-risk environments.

Key Features

Fire Resistance: Certified 2-hour fire-rated glass and steel frame to prevent fire and smoke penetration.

Durable Construction: Manufactured from corrosion-resistant hollow pressed steel for longevity and structural integrity.

Design Flexibility: Available in fixed and operable types (top-hung, side-hung, or pivot), suited for diverse architectural requirements.


Seamless Aesthetics: Clean lines and customizable finishes to blend with both modern and traditional designs.

Enhanced Safety: Designed to contain fire spread and ensure life safety in compliance with national and international fire safety standards.



Low Maintenance: Powder-coated or galvanized options resist weathering and require minimal upkeep.



Window Construction

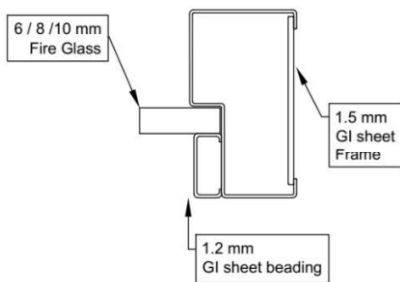

Window Frame Variant



Colour Shades



RAL3020



RAL7011



RAL7037




RAL7040



RAL7047



RAL9001



RAL9016

Technical Specification

- Window shutter MOC: 1.2 mm GI sheet,
- Shutter thickness: 46 mm
- Infill Insulation: Rockwool 96 kg / cc
- Pad plates: 3 mm predrilled and taped.
- Window frame profiles: 60x57, 100x57, 143x57
- Rabbets: Single rabbet or double rabbet.
- Door frame MOC: 1.5 mm GI sheets.
- Finish: Pure polyester powder coating finish.

Applications

- Hospitals & Healthcare Facilities
- Industrial Plants & Warehouses
- Schools & Institutions
- Commercial Buildings
- Stairwells, Escape Routes & Fire Compartments
- Data Centers & Electrical Rooms

Government Organizations



Banking Industry



IndusInd Bank



Automobile Industry



Paint Industry



Chemical Industry



Ceramic Industry



Food Industries



Hospitals



Other Industry



Pharma



RANBAXY

POWER PLANTS



CONTACT US

VISIT US



www.indiansafetysolution.com

OFFICE ADDRESS



Hotel Amiras
Compound, Ahmedabad - Mehsana
Highway, Ta. Kalol, Dist. -
Gandhinagar - 382729, Gujarat

Work Shop :



9 Shivam Estate, Chhatral GIDC,
Chhatral, Ta. Kalol, Dist.
Gandhinagar, 382729



indiansafetysolution.com



+91 89 80 748 339