

# PC829 Series

\* TÜV (VDE0884) approved type is also available as an option.

## ■ Features

1. Symmetrical terminal configuration  
**PC829** : 2-channel type  
**PC849** : 4-channel type
2. High current transfer ratio  
(CTR : MIN. 50% at  $I_F = 5\text{mA}$ ,  $V_{CE} = 5\text{V}$ )
3. High isolation voltage between input and output ( $V_{iso}$  : 5 000V<sub>rms</sub>)
4. Recognized by UL, file No. E64380


## ■ Applications

1. Telephone exchangers
2. Computer terminals
3. System appliances, measuring instruments
4. Signal transmission between circuits of different potentials and impedances

## High Density Mounting Type Photocoupler

## ■ Outline Dimensions

(Unit : mm)

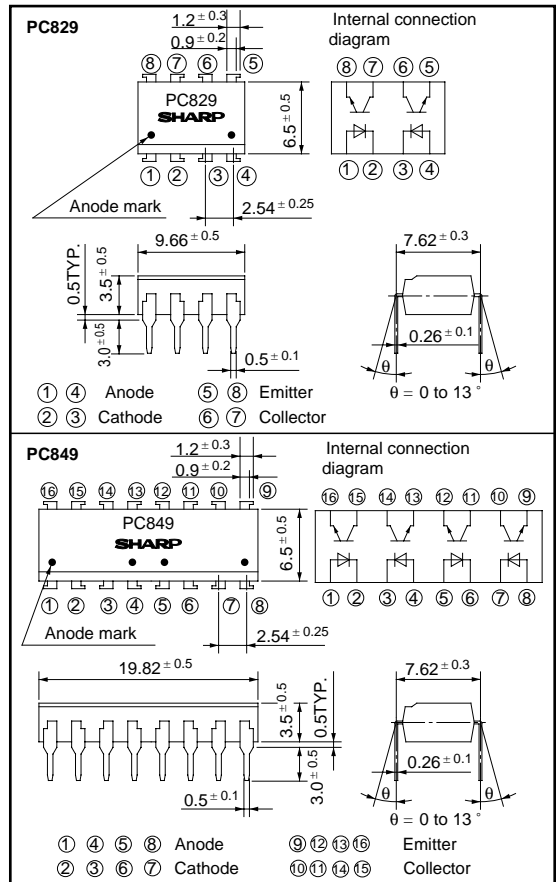

## ■ Absolute Maximum Ratings (Ta = 25°C)

	Parameter	Symbol	Rating	Unit
Input	Forward current	$I_F$	50	mA
	<sup>1)</sup> Peak forward current	$I_{FM}$	1	A
	Reverse voltage	$V_R$	6	V
Output	Power dissipation	P	70	mW
	Collector-emitter voltage	$V_{CEO}$	35	V
	Emitter-collector voltage	$V_{ECO}$	6	V
	Collector current	$I_C$	50	mA
	Collector power dissipation	$P_C$	150	mW
	Total power dissipation	$P_{tot}$	170	mW
	<sup>2)</sup> Isolation voltage	$V_{iso}$	5 000	V <sub>rms</sub>
	Operating temperature	$T_{opr}$	- 25 to + 100	°C
	Storage temperature	$T_{stg}$	- 40 to + 125	°C
	<sup>3)</sup> Soldering temperature	$T_{sol}$	260	°C

\*1 Pulse width ≤ 100μs, Duty ratio : 0.001

\*2 40 to 60% RH, AC for 1 minute

\*3 For 10 seconds

■ Electro-optical Characteristics

(Ta= 25°C)

Parameter			Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage		V <sub>F</sub>	I <sub>F</sub> = 20mA	-	1.2	1.4	V
	Peak forward voltage		V <sub>FM</sub>	I <sub>FM</sub> = 0.5A	-	-	3.0	V
	Reverse current		I <sub>R</sub>	V <sub>R</sub> = 4V	-	-	10	μ A
	Terminal capacitance		C <sub>t</sub>	V = 0, f= 1kHz	-	30	250	pF
Output	Collector dark current		I <sub>CEO</sub>	V <sub>CE</sub> = 20V, I <sub>F</sub> = 0	-	-	10 <sup>-7</sup>	A
Transfer charac- teristics	Current transfer ratio		CTR	I <sub>F</sub> = 5mA, V <sub>CE</sub> = 5V	50	-	400	%
	Collector-emitter saturation voltage		V <sub>CE(sat)</sub>	I <sub>F</sub> = 20mA, I <sub>C</sub> = 1mA	-	0.1	0.2	V
	Isolation resistance		R <sub>ISO</sub>	DC500V, 40 to 60% RH	5 x 10 <sup>10</sup>	10 <sup>11</sup>	-	Ω
	Floating capacitance		C <sub>f</sub>	V = 0, f= 1MHz	-	0.6	1.0	pF
	Cut-off frequency		f <sub>c</sub>	V <sub>CE</sub> = 5V, I <sub>C</sub> = 2mA, R <sub>L</sub> = 100Ω, - 3dB	-	80	-	kHz
	Response time	Rise time	t <sub>r</sub>	V <sub>CE</sub> = 2V, I <sub>C</sub> = 2mA, R <sub>L</sub> = 100Ω	-	4	-	μ s
		Fall time	t <sub>f</sub>		-	3	-	μ s

Fig. 1 Forward Current vs. Ambient Temperature

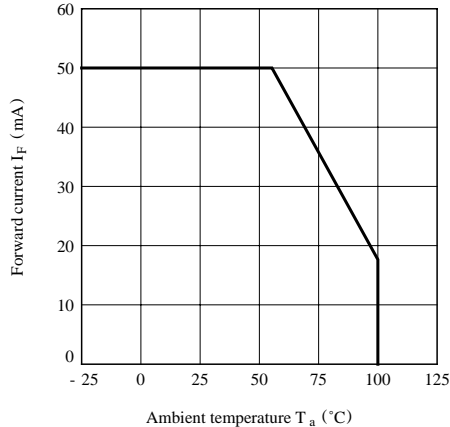


Fig. 2 Collector Power Dissipation vs. Ambient Temperature

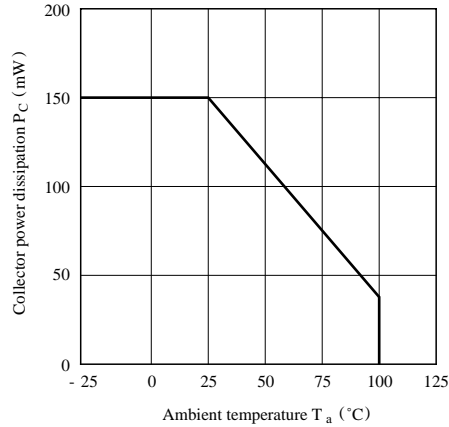


Fig. 3 Peak Forward Current vs. Duty Ratio



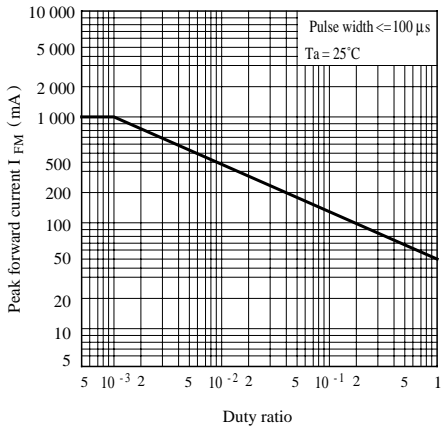



Fig. 4 Forward Current vs. Forward Voltage

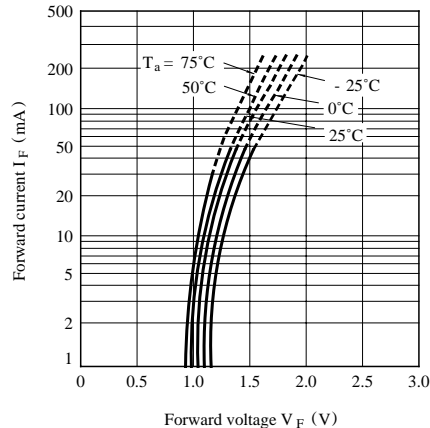


**Fig. 5 Current Transfer Ratio vs. Forward Current**

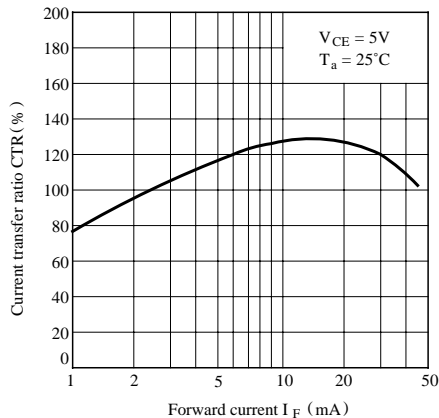


**Fig. 6 Collector Current vs. Collector-emitter Voltage**

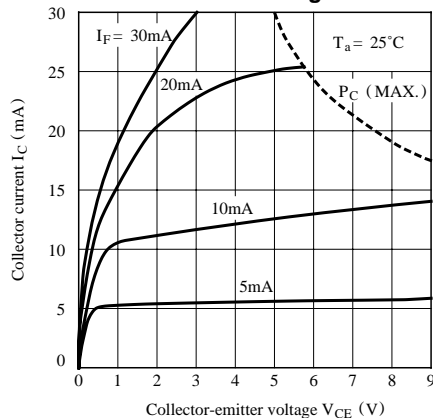


**Fig. 7 Relative Current Transfer Ratio vs. Ambient Temperature**

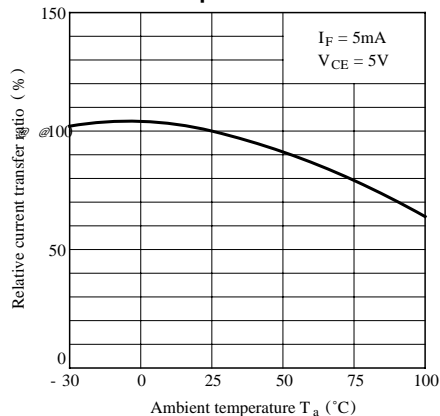

**Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature**

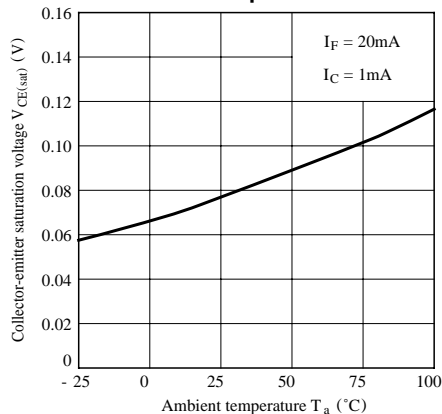

**Fig. 9 Collector Dark Current vs. Ambient Temperature**

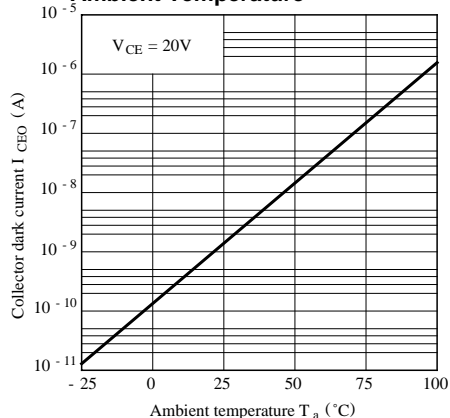

**Fig.10 Response Time vs. Load Resistance**


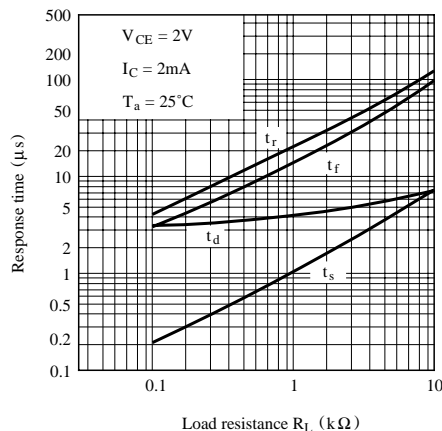


Fig.11 Frequency Response

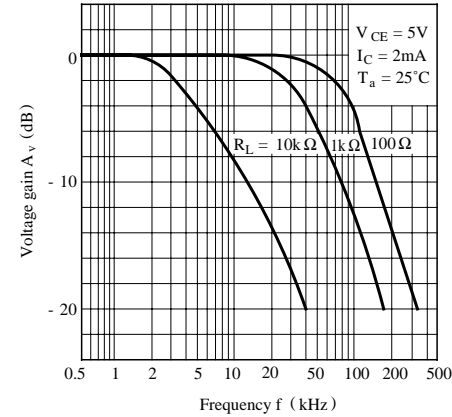

Test Circuit for Response Time



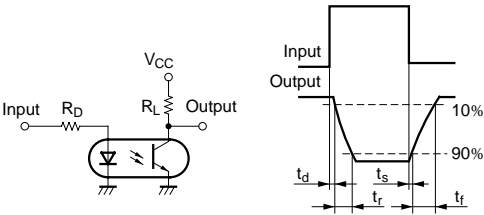


Fig.12 Collector-emitter Saturation Voltage vs. Forward Current

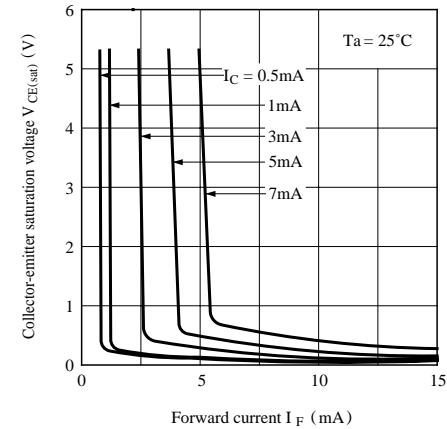

Test Circuit for Frequency Response



● Please refer to the chapter “Precautions for Use ”