

# STRENGTH OF MATERIALS - GATE

**Kulasekaran**

January 29, 2023

# Contents

<b>1</b>	<b>Properties of Materials</b>	<b>3</b>
1.1	Basics	3
1.2	Stress( $\sigma$ )	3
1.3	Strain( $\epsilon$ )	4
1.4	Stress-Strain curve	4
1.5	Properties of Materials	5
1.5.1	Ductility	5
1.5.2	Brittleness	5
1.5.3	Malleability	5
1.5.4	Hardness	5
1.5.5	Toughness	5
1.6	Creep	5
1.7	Stress relaxation	5
1.8	Elasticity	6
1.9	Resilience	6
1.10	Proof stress	6
1.11	Elasto-Plastic behaviour	6
1.12	Types of Material Behaviour	6
1.13	Fatigue	7
1.14	Failure of Materials in Tension and Compression	7
1.14.1	Ductile Metals in Tension	7
1.14.2	Brittle Metals in Tension	7
1.14.3	Ductile Metals in Compression	7
1.14.4	Brittle Metals in Compression	7
<b>2</b>	<b>Stress, Strain and Elastic Constants</b>	<b>8</b>
2.1	Normal Stress	8
2.1.1	Direct axial stress	8
2.1.2	Bending stress	8
2.2	Shear (or) Tangential stress( $\tau$ )	8
2.2.1	Direct shear stress	8
2.2.2	Torsional shear stress	8
2.3	Matrix representation of stress and strain	8
2.3.1	Strain Types	9
2.3.2	Differential form of Strains	9
2.4	Allowable stresses	10
2.5	Saint Venant's principle	10
2.6	Hooke's law	10
2.7	Elastic constants	10
2.7.1	Young's modulus(E)	10
2.7.2	Shear modulus (or) Rigidity modulus(G)	10
2.7.3	Bulk modulus(k)	10
2.7.4	Poisson's ratio( $\mu$ )	11
2.7.5	Relationship between elastic constants	11
2.8	Applications of Hooke's law	11
2.8.1	Effect of Uniaxial Loading	11
2.8.2	Effect of Triaxial Loading	11
2.9	Volumetric Strain( $\epsilon_v$ )	11
2.9.1	For Rectangular prismatic member	11
2.9.2	For Cylindrical rod	11
2.9.3	For Spherical body	11
2.10	Elongation in axially loaded members	12
2.10.1	Axially loaded prismatic bar	12
2.10.2	Axially loaded Circular Tapered bar	12
2.10.3	Axially loaded Rectangular Tapered bar	12
2.11	Principle of Superposition	12
2.12	Elongation in Composite members	13

2.12.1	Elongation in composite rectangular member . . . . .	13
2.13	Elongation due to Self-Weight . . . . .	13
2.13.1	Rectangular Prismatic bar . . . . .	13
2.13.2	Conical Bar . . . . .	13
2.13.3	Bar of Uniform strength . . . . .	13
2.14	Statically Indeterminate Axial Loaded structures . . . . .	14
2.15	Thermal stresses . . . . .	14
2.15.1	Thermal stresses in Composite bars . . . . .	14
2.16	Stresses in Nuts and Bolts . . . . .	14
2.17	Strain Energy(U) . . . . .	15
2.17.1	Strain energy in Prismatic bar . . . . .	15
2.17.2	Strain energy in Prismatic bar of varying cross section . . . . .	15
2.17.3	Strain energy due to shear force . . . . .	15
2.17.4	Strain energy in terms of principal stresses . . . . .	15
2.17.5	Strain energy due to Bending moment . . . . .	15
2.17.6	Strain energy due to Torque . . . . .	15
<b>3</b>	<b>Shear force and Bending Moment</b>	<b>16</b>
3.1	Types of Loading . . . . .	16
3.2	Types of supports . . . . .	16
3.2.1	Types of 2D Supports . . . . .	16
3.2.2	Types of 3D Supports . . . . .	16
3.3	Types of Beams . . . . .	16
3.4	Statically determinate structure . . . . .	17
3.5	Shear Force . . . . .	17
3.6	Bending Moment . . . . .	17
3.7	Important points about SFD and BMD . . . . .	17
3.8	Curve Tracing for SFD and BMD . . . . .	17
3.9	SFD and BMD by Integration . . . . .	18
3.10	Effect of Concentrated moment on SFD and BMD . . . . .	18
3.11	Loading diagram and BMD from SFD . . . . .	18
3.12	Loading diagram from BMD . . . . .	19

# Chapter 1

## Properties of Materials

### 1.1 Basics

- **Longitudinal Axis:** The Line passing through the center of all the planes along the longest dimension of the member is called as Longitudinal Axis.
  - **Cross Sectional Area (CS):** The plane normal to the longitudinal axis of the object
  - **Prismatic Bar:** A member with constant cross-sectional area along its whole length
- 

### 1.2 Stress( $\sigma$ )

- **Stress( $\sigma$ ):** The internal resisting force which resists deformation in object when a force is acting on it.  $\sigma = \frac{F}{A}$ 
    - Stress is developed only when the motion due to the force is restricted
    - Pressure and Stress are not the same. Pressure is external Normal force over a surface.
    - **Normal Stress( $\sigma$ ):** Stress acting perpendicular to CS area.
      - Sign Convention:**
        - \* Tensile stress ( $\leftarrow \boxed{\dots} \rightarrow$ ) = Positive (+ve)
        - \* Compressive stress ( $\rightarrow \boxed{\dots} \leftarrow$ ) = Negative (-ve)
    - **Shear Stress( $\tau$ ):** Stress acting tangential(parallel) to CS area.
- 

- **Engineering (or) Nominal Stress**

$$\rightarrow \boxed{\sigma_{Engg} = \frac{F}{A_0}}$$

$\rightarrow A_0$  = Original CS Area. Its called Original because, when an object is developing stress, there will be deformation to the object will change the cross sectional area. But, if we are using the initial cross sectional area to calculate stress, then its called Engineering stress (or) Nominal stress (or) **Average stress**

---

- **True stress (or) Actual stress**

$$\rightarrow \boxed{\sigma_{actual} = \frac{F}{A_a}}$$

$$\rightarrow A_a = A_0 + \Delta A$$

\*  $\Delta A$  = +ve for Compression, as Area( $\uparrow$ ) during compression

\*  $\Delta A$  = -ve for Tension, as Area( $\downarrow$ ) during Tension

$$\Rightarrow \text{In Tension } \boxed{\sigma_{True} > \sigma_{actual}} \qquad \Rightarrow \text{In Compression } \boxed{\sigma_{True} < \sigma_{actual}}$$


---

### 1.3 Strain( $\epsilon$ )

- $\epsilon = \frac{\text{Change in dimension}}{\text{Original dimension}} = \frac{\Delta L}{L} \Rightarrow \epsilon_{Engg} = \frac{\Delta L}{L_0} \Rightarrow \epsilon_{actual} = \frac{\Delta L}{L_a} \Leftarrow L_a = L_0 \pm \Delta L$
  - $L_a = L_0 + \Delta L$  for Tension       $L_a = L_0 - \Delta L$  for Compression
  - **Relationship between  $\sigma_{Engg}$  &  $\sigma_{actual}$  :**  $\sigma_{actual} = \sigma_{Engg}(1 \pm \epsilon_{Engg}) \Leftarrow +ve(\text{Tension}) \ \& \ -ve(\text{Compression})$
- 

### 1.4 Stress-Strain curve

- The Mechanical properties of materials used in engineering are determined using experiments performed on small specimens
  - **ATSM** - American Society for Testing and Materials
  - **UTM** - Universal Testing Machine (for Tension test)
  - **Specimen spec** - Must be a cylindrical rod with  $L/D = 4$
- **Stress-Strain curve for Tension**

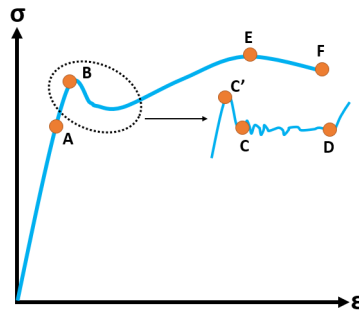

- A = PROPORTIONAL LIMIT
    - \* **Hooke's Law:** stress  $\propto$  strain
    - \* Hooke's law is valid upto this point i.e., Linear variation of stress and strain upto A
  - B = ELASTIC LIMIT
    - \* Maximum stress upto which material can retain its original dimension upon load removal
    - \* Material behaves perfectly elastic up until B
    - \* Only Elastic or Elastoplastic deformation (Elastoplastic = both plastic and elastic deformation)
  - C' = UPPER YIELD POINT
    - \* Depends on CS area, shape of specimen and type of the test equipment.
    - \* Has no practical significance
  - C = LOWER YIELD POINT
    - \* Also called as actual yield point and stress at C is the Yield stress( $\sigma_y$ )
    - \* The yielding begins from this point
  - CD = PERFECTLY PLASTIC REGION
    - \* Strain occurring without any increase in stress
  - DE = STRAIN HARDENING REGION
    - \* strain increases with faster rate in this region
    - \* material undergoes change in the crystalline structure
  - E = ULTIMATE YIELD POINT
    - \* Stress corresponding to this point is called Ultimate stress ( $\sigma_U$ )
  - F = FRACTURE POINT
    - \* Stress corresponding to this point is called Ultimate ( $\sigma_F$ )
    - \* Region between EF is called the **Necking region**, where the CS area is drastically reduced.
  - **Plastic Strain:** Strain before Yield point
  - **Elastic Strain:** Strain After Yield point
  - Fracture Strain( $\epsilon_F$ ) depends on Carbon content %. If carbon( $\uparrow$ ), fracture strain decreases
-

## 1.5 Properties of Materials

### 1.5.1 Ductility

- Large deformations are possible in ductile material before fracture
  - These materials have post-elastic strain greater than 5%
- 

### 1.5.2 Brittleness

- These materials have post-elastic strain less than 5%
  - Fracture takes place immediately after elastic limit
  - Fracture and ultimate points are the same
- 

### 1.5.3 Malleability

- The property that tells if a metal can be converted into thin sheet by pressing it.
  - This property is great use in operations like forging, hot rolling, stamping, etc.,
- 

### 1.5.4 Hardness

- Resistance to scratch or abrasion
  - Two methods of Hardness measurement:
    - Mohr's test
    - Indentation hardness - Brinell, Rockwell, Vickers, Knoop
- 

### 1.5.5 Toughness

- Property which enables material to absorb energy without fracture.
  - If a material is tough it has ability to store large amount of strain energy before fracture.
  - Ductile materials are tough and brittle materials are hard
  - **Modulus of Toughness:** Total strain energy per unit volume up until fracture
  - Modulus of Toughness =  $\frac{\sigma_y + \sigma_U}{2} * \epsilon_F$
- 

## 1.6 Creep

- Permanent deformation in a material under constant loading after a long period of time
  - Factors affecting creep: Load magnitude, type of loading, age of loading, Temperature
  - **Homologous temperature:** Half of melting point, creep becomes appreciable at this temperature
- 

## 1.7 Stress relaxation

- The reason why electric wires sag after a long period of time.
  - The stress gradually diminishes and reaches a constant value after a period of time.
-

## 1.8 Elasticity

- The property by which original dimensions can be recovered upon unloading is called elasticity
  - within elastic limit, the curve can be both linear and non-linear.
- 

## 1.9 Resilience

- The total strain energy which can be stored in the given volume of the metal and can be released after unloading is called resilience.
- Resilience = Area under stress-strain curve within elastic limit
- **Modulus of resilience**( $U_r$ ): Maximum elastic energy per unit volume. This occurs when elastic limit coincides with yield point.

- $$U_r = \frac{1}{2} * \sigma_y * \epsilon_y = \frac{\sigma_y^2}{2E} \iff \epsilon_y = \frac{\sigma_y}{E}$$

---


## 1.10 Proof stress

- Some materials do not show clear yield point on the stress-strain curve.
  - For such materials the yield point is calculated by offset method.
  - A line parallel to the curve until the elastic limit is drawn starting from 0.2% of the strain. This line meets the curve at a point and the corresponding stress at this point is called Proof stress.
- 

## 1.11 Elasto-Plastic behaviour

- during unloading if only part of the original dimension was recovered, then the remaining unrecoverable strain energy is called **Inelastic strain energy**
  - Beyond elastic limit, if a material undergoes continuous loading and unloading, then yield limit of material increases continuously
- 

## 1.12 Types of Material Behaviour

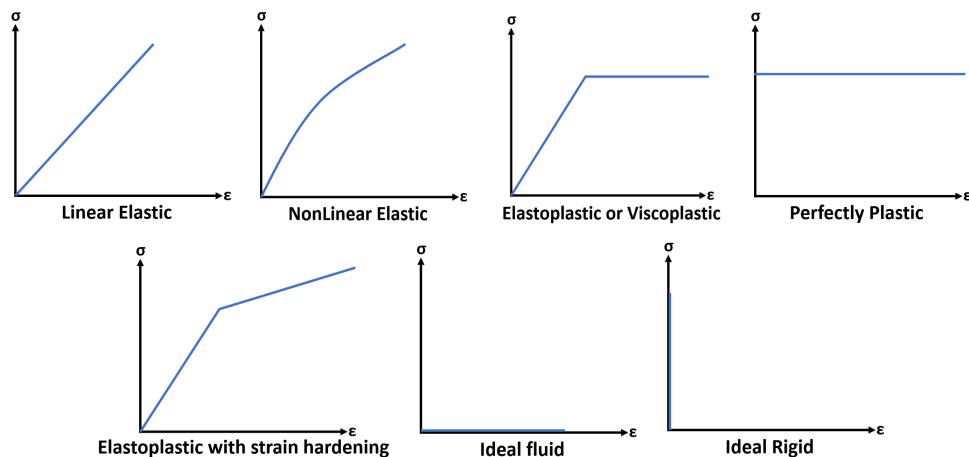

## 1.13 Fatigue

- Materials behave differently under static and dynamic loading
  - Factors affecting fatigue: Loading, Temperature, Loading frequency, Corrosion, Stress concentration
  - **Fatigue Initiation life:** The number of load cycles required to initiate a surface crack
  - **Fatigue Propagation life:** The number additional load cycle required to propagate surface crack
  - **Endurance limit:** The stress below which material has no probability of cracking even with infinite load cycles. Endurance limit exists between elastic limit and yield point.
- 

## 1.14 Failure of Materials in Tension and Compression

### 1.14.1 Ductile Metals in Tension

- Ductile materials are weak in shear
  - Cup and cone failure
  - failure plane angle is  $45^\circ$
- 

### 1.14.2 Brittle Metals in Tension

- Brittle materials are weak in tension
  - Failure plane angle is  $90^\circ$
- 

### 1.14.3 Ductile Metals in Compression

- Failure plane parallel to compressive load
- 

### 1.14.4 Brittle Metals in Compression

- Brittle materials fail in shear
  - Failure plane angle is  $45^\circ$
-



## Chapter 2

# Stress, Strain and Elastic Constants

### 2.1 Normal Stress

- Stress acting perpendicular to the CS area
- They are of two types: Direct axial stress, Bending stress

#### 2.1.1 Direct axial stress

- These stress are produced when axial force is acting at CG of cross section

#### 2.1.2 Bending stress

- Produced due to Bending moments. Bending stresses vary linearly from 0 at Neutral axis to Maximum at farthest fibre from Neutral Axis

---

### 2.2 Shear (or) Tangential stress( $\tau$ )

- Shear stress( $\tau$ ) =  $\boxed{\frac{ShearForce}{Area} = \frac{S}{A}}$
- They are of two types: Direct shear, Torsional shear

#### 2.2.1 Direct shear stress

- Due to direct shear force acting on the surface

#### 2.2.2 Torsional shear stress

- Produced when a member is subjected to torsional moment (Twisting)

---

### 2.3 Matrix representation of stress and strain

- Stress and strain are called **tensor** quantities as are they are defined with respect to an area. They are 2nd order Tensors
- In a 3D body, stress or strain at a point has 9 components (3 Normal and 6 shear)
- In a 3D, there are 3 mutually perpendicular planes(xy,yz,xz). Each plane has 1 normal component and 2 shear component.

$$stress = \begin{bmatrix} \sigma_{xx} & \tau_{xy} & \tau_{xz} \\ \tau_{yx} & \sigma_{yy} & \tau_{yz} \\ \tau_{zx} & \tau_{zy} & \sigma_{zz} \end{bmatrix}$$

$$strain = \begin{bmatrix} \epsilon_{xx} & \phi_{xy}/2 & \phi_{xz}/2 \\ \phi_{yx}/2 & \epsilon_{yy} & \phi_{yz}/2 \\ \phi_{zx}/2 & \phi_{zy}/2 & \epsilon_{zz} \end{bmatrix}$$

- Shear stresses in two mutually perpendicular directions are equal:  $\tau_{yx} = \tau_{xy}$   $\tau_{zx} = \tau_{xz}$   $\tau_{yz} = \tau_{zy}$
- Total shear strain in x-y plane:  $\frac{\phi_{xy}}{2} + \frac{\phi_{yx}}{2} = \phi_{xy}$
- Total shear strain in y-z plane:  $\frac{\phi_{zy}}{2} + \frac{\phi_{yz}}{2} = \phi_{yz}$
- Total shear strain in x-z plane:  $\frac{\phi_{xz}}{2} + \frac{\phi_{zx}}{2} = \phi_{xz}$
- $\epsilon_{xx}, \epsilon_{yy}, \epsilon_{zz}$  are linear strains in x, y, z directions respectively
- Under pure normal stress = Volume changes, shape remains same
- Under pure shear stress = Volume remains same, shape changes.

### 2.3.1 Strain Types

#### Axial Strain( $\epsilon$ )


- Strain the direction of the applied force. Also called as **Linear strain**

$$\epsilon = \frac{\text{Change in dimension}}{\text{original dimension}} = \frac{\Delta L}{L}$$

#### Lateral Strain( $\epsilon_L$ )

- Strain in the direction perpendicular to the applied force.
- Eg. When an object is stretched, its length increases, but its width and height decreases. This decrease in width and height is called Lateral strain. The increase in length is called Linear strain

#### Shear strain( $\phi$ )

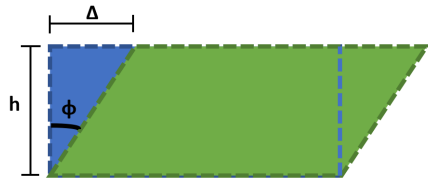

- Angular deformation caused by shearing force,  $\phi = \frac{\Delta}{h}$

### 2.3.2 Differential form of Strains

- Consider a point P(x,y,z). A force acting on P, shifts its position to (u,v,w)
- Then linear strains and shear strains are given by:

$$\Rightarrow \quad \epsilon_{xx} = \frac{\delta u}{\delta x} \quad \epsilon_{yy} = \frac{\delta v}{\delta y} \quad \epsilon_{zz} = \frac{\delta w}{\delta z} \quad (\phi_{xy} = \phi_{yx}) = \frac{\delta u}{\delta y} + \frac{\delta v}{\delta x} \quad (\phi_{xz} = \phi_{zx}) = \frac{\delta w}{\delta x} + \frac{\delta u}{\delta z} \quad (\phi_{yz} = \phi_{zy}) = \frac{\delta w}{\delta y} + \frac{\delta v}{\delta z}$$

## 2.4 Allowable stresses

- **Strength:** The ability of a structure to resist loading is called strength. For safety reasons, materials should have higher strength than what is required due to loading.
  - **Factor of Safety** =  $\frac{\text{Actual strength}}{\text{Strength required}}$
  - **Allowable Stress** ( $\sigma_A$ ) =  $\boxed{\sigma_{A(ductile)} \frac{\text{Yield stress}}{FOS}} = \boxed{\sigma_{A(brittle)} \frac{\text{Ultimate stress}}{FOS}}$
- 

## 2.5 Saint Venant's principle

- This principle states that the stress distribution in a prismatic bar is uniform except in the region of extreme ends.
  - $b$  = width of the prismatic bar
  - Section(1-1):  $\frac{b}{2}$  distance from the extreme ends
  - Section(2-2):  $\frac{b}{2} + \frac{b}{2}$  distance from the extreme ends
  - $\boxed{\sigma_{1-1} = 1.387\sigma_{avg}}$   $\boxed{\sigma_{2-2} = 1.027\sigma_{avg}}$   $\boxed{\sigma_{3-3} = \sigma_{avg}}$
- 

## 2.6 Hooke's law

- Assumptions: Homogeneous (made of same material), Isotropic (properties are same in all directions), elastic
  - Stress  $\propto$  Strain  $\implies \boxed{\frac{\sigma}{\epsilon} = E} \iff$  (Valid upto Proportional limit)
  - $E$  = Modulus of elasticity = slope of stress strain curve under proportional limit
- 

## 2.7 Elastic constants

### 2.7.1 Young's modulus( $E$ )

- $E = \frac{\text{Direct stress}}{\text{Direct strain}} = \frac{\sigma}{\epsilon}$

### 2.7.2 Shear modulus (or) Rigidity modulus( $G$ )

- $G = \frac{\text{Shear Stress}}{\text{Shear strain}} = \frac{\tau}{\phi}$

### 2.7.3 Bulk modulus( $k$ )

- $k = \frac{\text{Volumetric stress}}{\text{Volumetric strain}} = \frac{\sigma_{vol}}{\epsilon_V}$   $\boxed{\epsilon_V = \frac{\Delta \text{Volume}}{\text{Volume}}}$
-

### 2.7.4 Poisson's ratio( $\mu$ )

- $\mu = \frac{-\text{Lateral strain}}{\text{Linear strain}} \Leftarrow$  (defined in elastic region)
  - $\mu = 0.05 - 1$  (glass),  $0.1 - 0.2$  (concrete),  $0.25 - 0.42$  (metals),  $0.5$  (pure rubber, perfectly plastic)
  - For non-elastic region, it is called **Contraction ratio**
- 

### 2.7.5 Relationship between elastic constants

- $E = 3K(1 - 2\mu)$     $E = 2G(1 + \mu)$     $E = \frac{9KG}{3K + G}$     $\mu = \frac{3K - 2G}{6K + 2G}$
  - **Orthotropic material** = 9 elastic constants, **Anisotropic material** = 21 elastic constants
- 

## 2.8 Applications of Hooke's law

### 2.8.1 Effect of Uniaxial Loading

- Consider a rectangular prismatic bar with tensile force acting along x-axis

$$\boxed{\epsilon_{xx} = \frac{\sigma_x}{E}} \Rightarrow \boxed{\epsilon_{yy} = -\mu \frac{\sigma_x}{E}} \quad \boxed{\epsilon_{zz} = -\mu \frac{\sigma_x}{E}} \Leftarrow \epsilon_{yy} \ \& \ \epsilon_{zz} \text{ are Lateral strains}$$

### 2.8.2 Effect of Triaxial Loading

- Consider:  $\sigma_x$  acting along x-direction,  $\sigma_y$  acting along x-direction,  $\sigma_z$  acting along x-direction. (All are Tensile)

- $\boxed{\epsilon_{xx} = \frac{\sigma_x}{E} - \mu \frac{\sigma_y}{E} - \mu \frac{\sigma_z}{E}}$     $\boxed{\epsilon_{yy} = \frac{\sigma_y}{E} - \mu \frac{\sigma_x}{E} - \mu \frac{\sigma_z}{E}}$     $\boxed{\epsilon_{zz} = \frac{\sigma_z}{E} - \mu \frac{\sigma_x}{E} - \mu \frac{\sigma_y}{E}}$

---

## 2.9 Volumetric Strain( $\epsilon_V$ )

- How to derive?
- compute the volume of the member. take that as V.
- Now find  $\Delta V$ , that is differentiate V wrt to each factor.
- Then use:  $\boxed{\epsilon_V = \epsilon_x + \epsilon_y + \epsilon_z}$

### 2.9.1 For Rectangular prismatic member

- $\boxed{\frac{\sigma_x + \sigma_y + \sigma_z}{E} * (1 - 2\mu)}$

### 2.9.2 For Cylindrical rod

- $\boxed{\epsilon_V = \epsilon_L + 2\epsilon_d} \Leftarrow (\epsilon_d = \text{Diametrical strain})$

### 2.9.3 For Spherical body

- $\boxed{\epsilon_V = 3\epsilon_d}$

---

## 2.10 Elongation in axially loaded members

- How to derive?
- consider an element and find its elongation using  $\frac{PL}{AE}$ , Then integrate that  $\delta L$  for the whole length

### 2.10.1 Axially loaded prismatic bar

- In this case Elemental elongation is  $\frac{P_x d_x}{A_x E_x} \Leftarrow d_x = \text{Length of the element.}$
- $\Delta = \frac{PL}{AE}$  ( $AE = \text{Axial rigidity}$ ) and ( $\frac{AE}{L} = \text{Axial stiffness}$ )

### 2.10.2 Axially loaded Circular Tapered bar


- Here Diameter of the element  $= D_x = D_1 + \frac{D_2 - D_1}{L}x$
- $\Delta = \frac{4PL}{\pi E D_1 D_2} \Leftarrow D_1 = \text{smaller diameter and } D_2 = \text{Larger diameter}$

### 2.10.3 Axially loaded Rectangular Tapered bar

- The thickness of the bar is uniform
- $\Delta = \frac{PL \log_e \left( \frac{B_2}{B_1} \right)}{(B_2 - B_1)tE} \Leftarrow (B_1 = \text{Smaller height and } B_2 = \text{Larger height})$

## 2.11 Principle of Superposition

- If a member is subjected to various loadings then the resultant deformation will be equal to the algebraic sum of the deformation caused by the individual forces acting on the member.
- Consider the following example:

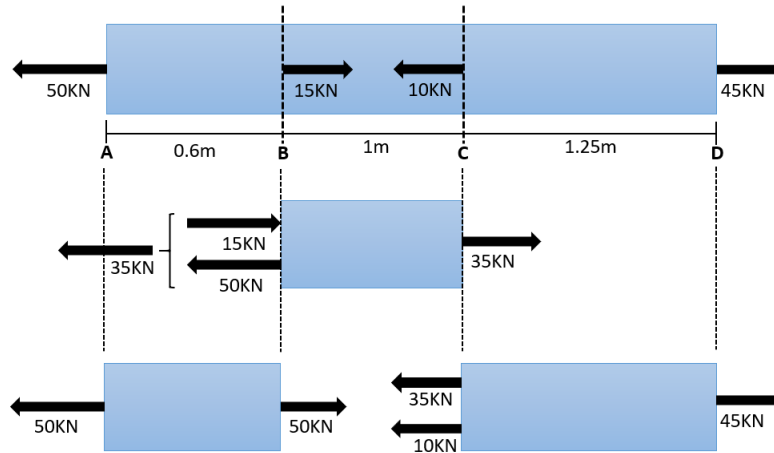


- Total elongation of the element( $\Delta$ )  $= \Delta_{AB} + \Delta_{BC} + \Delta_{CD}$

## 2.12 Elongation in Composite members

- Composite structures are those that are made of more than one material

### 2.12.1 Elongation in composite rectangular member

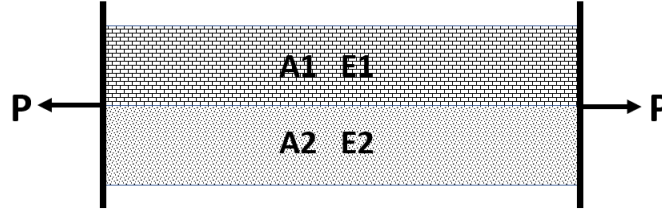

- Condition of Equilibrium:  $P = P_1 + P_2$
- As two materials are joined firmly:  $\Delta_1 = \Delta_2 \Rightarrow \frac{P_1 L_1}{A_1 E_1} = \frac{P_2 L_2}{A_2 E_2}$
- $\Delta = \frac{PL}{A_1 E_1 + A_2 E_2}$  and  $E_{eq} = \frac{A_1 E_1 + A_2 E_2}{A_1 + A_2} \Rightarrow \Delta = \frac{PL}{(A_1 + A_2) E_{eq}}$

## 2.13 Elongation due to Self-Weight

- How to derive?
- Find the elemental deflection due to the self weight and then Integrate for the whole length.

### 2.13.1 Rectangular Prismatic bar

- $\gamma = \text{Unit weight} = \frac{\text{Weight}}{\text{unit volume}}$
- $W_x = \gamma(A * x) \Leftarrow W_x = \text{Self weight acting at an element } x \text{ distance away from the bottom of the bar}$
- $\Delta = \frac{\gamma L^2}{2E} \Rightarrow \frac{WL}{2AE}$

### 2.13.2 Conical Bar

- $W_x = \gamma * \left(\frac{1}{3}\right) \pi \left(\frac{D_x}{2}\right)^2 x$   $\Delta = \frac{\gamma L^2}{6E}$

### 2.13.3 Bar of Uniform strength

- It is possible to maintain uniform stress at all the sections by increasing the area from the lower level to Higher level.

- $A_1 = A_2 e^{\left(\frac{\rho g L}{\sigma}\right)}$

## 2.14 Statically Indeterminate Axial Loaded structures

- Those structures which cannot be solved using static equilibrium equations alone are called Statically Indeterminate structures
  - They can be solved using flexibility approach or stiffness approach
  - Flexibility approach involves equations using the relations in Slope, deflection and rotation and are called **compatibility equation**
- 

## 2.15 Thermal stresses

- **NOTE:** Thermal stresses do not depend on the area of cross section
  - Thermal Strain  $\epsilon_{Th} = \alpha T$   $\Leftarrow$  ( $\alpha$  = Coefficient of thermal expansion)
  - Consider a rectangular prismatic bar of length L between fixed supports. If the temperature of the bar is raised, then  $\Delta = 0$  (As the bar is fixed)
  - But due to rise in temperature of  $T^\circ\text{C}$ , the bar will try to expand and so will be under compression
  - $\Delta = 0 = L\alpha T - \frac{\sigma_{Th}L}{E} \Rightarrow \sigma_{Th} = E\alpha T \Leftarrow$  (Thermal stresses are independent of member dimensions)
- 

### 2.15.1 Thermal stresses in Composite bars

- Mostly we use three sets of relations
- $P_1 = P_2$  (under no other external load)  $\Rightarrow \sigma_1 A_1 = \sigma_2 A_2$
- $\Delta_1 = \Delta_2$
- The material with larger  $\alpha$  value, will tend to deform more under thermal load
- Consider a composite cantilever bar made of copper and steel and both the materials are rigidly fixed to each other. Copper has higher coefficient of thermal expansion and so upon temperature rise will tend to expand more than steel.
- As a result, copper part will be under compression as steel is not letting it to expand and steel part will be under tension as copper is pulling it.
- As they are affixed to each other rigidly, both their end deformation value will be the same. Using that relation we can write: Copper free expansion + contraction = steel free expansion + tension  $\Rightarrow$

$$L\alpha_c T - \frac{\sigma_c L}{E_c} = L\alpha_s T + \frac{\sigma_s L}{E_s}$$

---

## 2.16 Stresses in Nuts and Bolts

- **Effect of Tightening of Nut**
  - P = pitch of screw on the bolt,  $D_b$  = Bolt diameter
  - $A_s$  = Area of steel bolt =  $\frac{\pi D_b^2}{4}$
  - $D_i$  = Inner diameter of copper tube,  $D_o$  = Outer diameter of copper tube
  - $\theta$  = Nut is rotated by  $\theta^\circ$ , n = Number of turns =  $\frac{\theta}{360}$
  - np = Axial movement of nut
  - Total tensile force in bolt = total compressive force in copper tube  $\Rightarrow \sigma_s A_s = \sigma_c A_c$
  - $np = \left( \frac{\sigma_s L}{E_s} \right) + \left( \frac{\sigma_c L}{E_c} \right) \Leftarrow$  Using the above relation, solve for  $\sigma_s$  and  $\sigma_c$
-

## 2.17 Strain Energy(U)

- The strain energy is equal to the work done by the load provided no energy is added or subtracted in the form of heat.
- **NOTE:** Strain energy of an elastic body due to more than one load cannot be found by simply adding the strain energy obtained from individual loads. In other words, The principle of superposition is not applicable on strain energy. This is because, Unlike deformation which is linear function, strain energy is a quadratic function.

- $$U = \frac{1}{2} P \Delta \iff \Delta = \text{Axial deflection}$$

---

### 2.17.1 Strain energy in Prismatic bar

- $$U = \frac{PL^2}{2AE}$$

---

### 2.17.2 Strain energy in Prismatic bar of varying cross section

- $$U = \frac{P^2}{2E} \left[ \frac{L_1}{A_1} + \frac{L_2}{A_2} + \dots \right]$$

---

### 2.17.3 Strain energy due to shear force

- $$U = \int \frac{S_x^2 dx}{2A_r G} \implies (A_r = \text{Reduced area})$$

---

### 2.17.4 Strain energy in terms of principal stresses

- $$U = \frac{1}{2E} (\sigma_1^2 + \sigma_2^2 - 2\mu\sigma_1\sigma_2) \iff (2D) \quad U = \frac{1}{2E} [\sigma_1^2 + \sigma_2^2 + \sigma_3^2 - 2\mu(\sigma_1\sigma_2 + \sigma_2\sigma_3 + \sigma_3\sigma_1)] \iff (3D)$$

---

### 2.17.5 Strain energy due to Bending moment

- $$U = \int \frac{M_x^2 ds}{2EI} \iff (I = \text{MOI about NA})$$

---

### 2.17.6 Strain energy due to Torque

- $$U = \int \frac{T_x^2 ds}{2GI_P} \iff (I_P = \text{Polar MOI})$$

---



# Chapter 3

## Shear force and Bending Moment

### 3.1 Types of Loading

- Point load
  - Uniformly Distributed Load
  - Uniformly Varying Load
  - Couple - Concentrated moment at any point is called couple
- 

### 3.2 Types of supports

#### 3.2.1 Types of 2D Supports

- Fixed support -  $R_x, R_y, M_z$
- Hinged Support -  $R_x, R_y$
- Roller support -  $R_y$
- Double roller support -  $R_y, M_z$

#### 3.2.2 Types of 3D Supports

- Fixed support -  $R_x, R_y, R_z, M_x, M_y, M_z$
  - Hinged support -  $R_x, R_y, R_z$
  - Roller support -  $R$
- 

### 3.3 Types of Beams

- Simply supported beam
  - Cantilever beam
  - Propped cantilever beam
  - Fixed beam
  - Continuous beam
  - Overhanging beam
  - **NOTE: If an internal hinge is present in a beam, then Bending moment at hinge is Zero. Hinges carry only Axial load.**
-

### 3.4 Statically determinate structure

- A structure is said to be statically determinate if all the reaction forces can be found using the static equilibrium equations (2D):  $\sum F_x = 0 \quad \sum F_y = 0 \quad \sum M_z = 0$
- If R denotes the number of reactions and E denotes the number of equilibrium equations available, then if (R = E) the structure is determinate, if (R > E) then the structure is indeterminate

### 3.5 Shear Force

- Clockwise shear = +ve and Anticlockwise shear = -ve


### 3.6 Bending Moment

- Sagging Bending moment = +ve and Hogging Bending moment = -ve

### 3.7 Important points about SFD and BMD

- SFD is one degree higher than Loading diagram and BMD is one degree higher than SFD
- If a point load is present, then the SFD will change by that load's magnitude
- If a concentrated moment is present, then the BMD will change by that moment's magnitude
- Bending will be maximum/minimum at the point where Shear force is zero, but the inverse is not true
- Point of Contraflexure** - The point where Bending moment changes sign
- Focal length** - The distance between two adjacent points of contraflexure
- Shear span** - the portion of beam where shear force is constant.
- Relation between Loading rate and Shear force:  $\frac{dS}{dx} = -W$
- Relation between Shear force and bending moment:  $\frac{dM}{dx} = S_x \implies$  Slope of bending moment = shear force.
- Relation between Bending moment and Loading rate:  $\frac{d^2M}{dx^2} = -w$

### 3.8 Curve Tracing for SFD and BMD

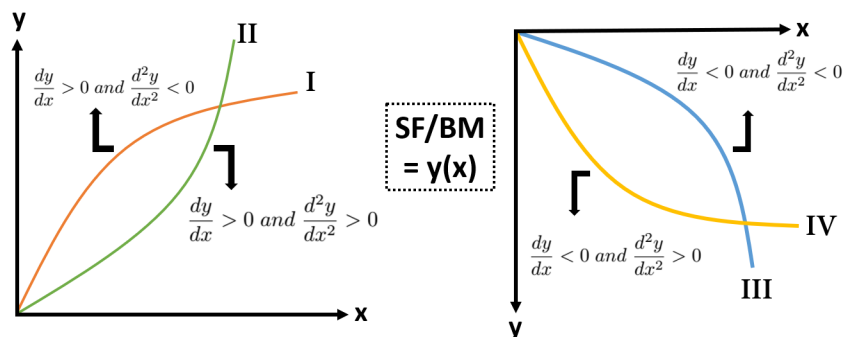

---

### 3.9 SFD and BMD by Integration

- Use the relations between Loading rate, shear force and Bending moment:

$$\Rightarrow \boxed{\frac{d^2 M}{dx^2} = -w} \quad \dots(i) \quad \boxed{\frac{dM}{dx} = S_x = -Wx + C_1} \quad \dots(ii) \quad \boxed{M_x = \frac{-Wx^2}{2} + C_1x + C_2} \quad \dots(iii)$$


– **NOTE:** Eqn(i)'s RHS will change according the loading. For eg. in case of Uniformly varying load,

$$\boxed{\frac{d^2 M}{dx^2} = -W_x = \frac{-Wx}{L}}$$

- The constants  $C_1$  and  $C_2$  can be found by boundary conditions
  - From (ii) SFD can be plotted, from (iii) BMD can be plotted
- 

### 3.10 Effect of Concentrated moment on SFD and BMD

- At the point of concentrated moment, discontinuity occurs in BMD. The BMD ordinate changes by the magnitude of the moment. For SFD, concentrated moment induces support reactions only.

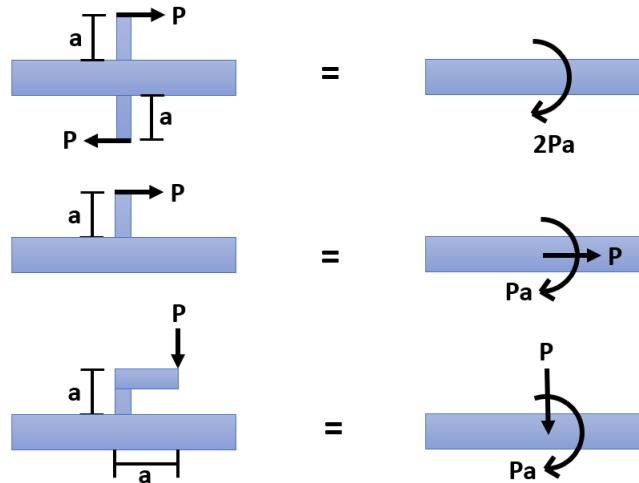

### 3.11 Loading diagram and BMD from SFD

- In SFD, the portion where SF is constant, it means no load is acting in that portion
  - In SFD, Vertical lines represent loads (Generally upward loads denote reactions)
  - Inclined line in SFD denotes Uniformly distributed load. Intensity of UDL = slope of line in SFD
  - Parabolic curve in SFD denotes Uniformly varying load.
  - If  $\sum M$  at supports is zero, then the support is hinged or roller. If its not zero, then it is a fixed support.
-

### 3.12 Loading diagram from BMD

- In BMD, the portion where there is an inclined line, that means no load is acting in that region
  - Parabolic curve in BMD denotes Uniformly distributed load.
  - Cubic curve in BMD denotes Uniformly varying load.
  - The point where BMD changes its ordinate suddenly, a concentrated moment is acting at that point.
  - BMD is one degree higher than SFD and two degree higher than Loading diagram
-

## Chapter 4

# Centroid and Moment of Inertia