Do Alternate Wetting and Drying Irrigation Technology and Nitrogen Rates Affect Rice Sheath Blight?

Adam H. Sparks[1†], *Nancy P. Castilla* [1], *Bjorn Ole Sander* [1]

[1]*International Rice Research Institute, Crop and Environmental Sciences Division, Los Baños, Laguna, Philippines, 4031*

[†] *Current Address: University of Southern Queensland, Centre for Crop Health, West Street, Tooowoomba, Queensland, Australia, 4350*

Abstract

Water and nitrogen management play vital roles in rice production. However, the mismanagement of these two management practices may trigger sheath blight of rice, caused by *Rhizoctonia solani*, which is favored by wet conditions, high relative humidity, and high nitrogen fertilizer levels. To understand how different combinations of water and nitrogen management affect sheath blight epidemics, we conducted two separate split-plot experiments with a water saving (alternate wetting and drying) regime and traditional flood irrigation regime combined with differing nitrogen treatments in the dry seasons of 2015 and 2016. Disease was scored in the same way in both experiments using a sheath blight assessment scale for field evaluation developed at the International Rice Research Institute to assess the severity on infected sheaths and leaves while sheath blight incidence on tillers were counted per hill. We were unable to detect any differences in disease in either experiment due to irrigation regime, N rates or the interaction of the two treatments in either season. This suggests that farmers can adopt water saving technologies without risking increased sheath blight incidence. We suggest that further cross-cutting research in this area is warranted.

1 Introduction

Alternate wetting and drying (AWD) is an irrigation technique for irrigated rice developed by the International Rice Research Institute (IRRI) and its partners that saves about 15-40% of irrigation water (B. Bouman and Tuong 2001; L. Feng et al. 2007). In AWD rice fields are exposed to several dry phases during the growth period without exposing the plants to water stress. In order to avoid yield decline under AWD "safe"

*Corresponding author: Adam.Sparks@usq.edu.au

threshold have been developed. Under safe AWD irrigation water is applied when the field water level reaches 15cm below the soil surface (Richards and Sander 2014). Fields are furthermore kept flooded during the flowering period. Besides saving water AWD also reduces greenhouse gas (GHG) emissions of rice fields, which is a substantial factor in the GHG budget of rice producing countries, by around 50% (Yan et al. 2005; Sander, Wassmann, and Siopongco 2016).

The AWD technology has been identified as promising climate smart practice for different rice growing regions that can stabilize rice production in water scarce areas as well as help reduce the carbon footprint of rice production. Various countries, *e.g.*, Bangladesh, Vietnam, Thailand and the Philippines, plan to widely apply AWD to local rice production (Environment and Government of the People's Republic of Bangladesh –). However, a change in water regime in rice fields on large scale might encompass different other effects, for example related to plant health.

We therefore established field experiments in order to...

2 Materials and Methods

2.1 Experimental Design

Two experiments were conducted at the International Rice Research Institute's (IRRI) Ziegler Experiment Station in Los Baños, Calabarzon, Philippines (latitude 14° 11' N, , longitude 121° 15' E) in the 2015 and 2016 dry seasons. For the 2016 season changes were made to optimize the experiment based on findings from the 2015 season. Both seasons consisted of split plot design with four replicates where irrigation was the main plot and nitrogen (N) rate was the split plot treatment. The changes between seasons and experiments are detailed following.

2.1.1 2015 Dry Season

The main plot size was 12m x 12m (144 sq m), with a sub-plot size of 5m x 5m (25 sq m). Replication size was 12m x 24m (288 sq m) with a buffer of 1m per sub plot for a whole experiment size of 1,152 sq m. The main plot treatments were alternate wetting and drying (AWD) and) and continuously flooded (CF) or farmers' practice.

Irrigation in AWD plots was determined by the water level in plots, *i.e.*, when the water level reached 15cm below the soil surface irrigation water was applied to a level of 5cm. In CF plots a standing water layer of

54 3-5cm was maintained throughout the growing season.

55 The subplot treatments were different rates of nitrogen, 0 kg/ha (control), 100 kg/ha in three splits, and 120
56 kg/ha in three splits.

57 The plots were inoculated 20 days after transplanting using 151g of inoculum per plot (4m x 11m).

2.1.2   2016 Dry Season

59 In 2016 dry season the plot size was increased and due to these changes, the sizes of the replicates are not
60 equal as necessitated by the use of a larger area for the experiment. The main plot sizes were: Block 1 (B1)
61 21m x 20.5m (412.5 sq m) and Block 2 (B2) 20.25m x 21.6m (437.4 sq m). The sub plot sizes were B1 21m x
62 10.25m (215.25 sq m), B2 20.25m x 10.8m (218.7 sq m). The replication sizes were B1 - 42m x 20.5m (861 sq
63 m) and B2 - 40.5m x 21.6m (874.8 sq m). A buffer 0.5m per sub plot was used and the overall experiment
64 size was 3471.6 sq m.

65 Subplot N rates differed from the 2015 rates. The control was applied as 60 kg/ha split into two applications
66 and a second treatment of 180 kg/ha in three splits was applied.

67 Based on the 2015 results, the inoculation methods were modified in 2016 to increase the amount of inoculum
68 applied to a smaller area. Plots were inoculated 41 days after transplanting using ten bottles per one sampling
69 area (1m x 1m) per plot, where one bottle contained 151g inoculum. A total amount of 1,510g of inoculum
70 was applied to a 1m x 1m area.

2.2   Data Collection and Analysis

72 Disease scoring was the same in both experiments using a sheath blight assessment scale for field evaluation
73 developed at IRRI 1. Two sample areas per plot (1m x 1m) were assessed. for 9 hills per sample, the number
74 of tillers per hill and number of tillers with sheath blight (incidence) were measured. Tiller sheath blight
75 severity was measured for four tillers per hill and six leaves tiller. Five and four disease assessments were
76 made in 2015 and 2016, respectively.

77   [Figure 1 about here.]

78 Disease severity was converted to area under the disease progress stairs (AUDPS) (Simko and Piepho 2012).
79 As most of the data did not meet assumptions for normality, the analysis was carried out using multivariate
80 generalised linear mixed models implemented in the MCMCglmm package (Hadfield 2010) in R (R Core

Team 2017).

3 Results

4 Discussion

5 Acknowledgments

References

Supporting information captions (if applicable)

Bouman, B.A.M, and T.P. Tuong. 2001. "Field Water Management to Save Water and Increase Its Productivity in Irrigated Lowland Rice." *Agricultural Water Management* 49 (1): 11–30. doi:10.1016/S0378-3774(00)00128-1.

Environment, Ministry of, and Forests (MOEF) Government of the People's Republic of Bangladesh. –. "Intended Nationally Determined Contributions (Indc)."

Feng, Liping, B.A.M. Bouman, T.P. Tuong, R.J. Cabangon, Yalong Li, Guoan Lu, and Yuehua Feng. 2007. "Exploring Options to Grow Rice Using Less Water in Northern China Using a Modelling Approach: I. Field Experiments and Model Evaluation." *Agricultural Water Management* 88 (1 - 3): 1–13. doi:10.1016/j.agwat.2006.10.006.

Hadfield, Jarrod D. 2010. "MCMC Methods for Multi-Response Generalized Linear Mixed Models: The MCMCglmm R Package." *Journal of Statistical Software* 33 (2): 1–22. http://www.jstatsoft.org/v33/i02/.

R Core Team. 2017. *R: A Language and Environment for Statistical Computing.* Vienna, Austria: R Foundation for Statistical Computing. https://www.R-project.org/.

Richards, Meryl, and Bjoern Ole Sander. 2014. "Alternate Wetting and Drying in Irrigated Rice." CSA Practice Brief. Copenhagen, Denmark: CGIAR Research Program on Climate Change, Agriculture; Food Security (CCAFS).

Sander, Bjoern Ole, Reiner Wassmann, and J. D. L. C. Siopongco. 2016. "Mitigating Greenhouse Gas Emissions from Rice Production Through Water-Saving Techniques: Potential, Adoption and Empirical

105 Evidence." In, edited by C. T. Hoanh, R. Johnston, and V. Smakhtin, 193. Centre for Agriculture; Biosciences
106 International.

107 Simko, Ivan, and Hans-Peter Piepho. 2012. "The Area Under the Disease Progress Stairs: Calculation,
108 Advantage, and Application." *Phytopathology* 102 (4). Am Phytopath Society: 381–89.

109 Yan, Xiaoyuan, Kazuyuki Yagi, Hiroko Akiyama, and Hajime Akimoto. 2005. "Statistical Analysis of the
110 Major Variables Controlling Methane Emission from Rice Fields." *Global Change Biology* 11 (7). Blackwell
111 Science Ltd: 1131–41. doi:10.1111/j.1365-2486.2005.00976.x.
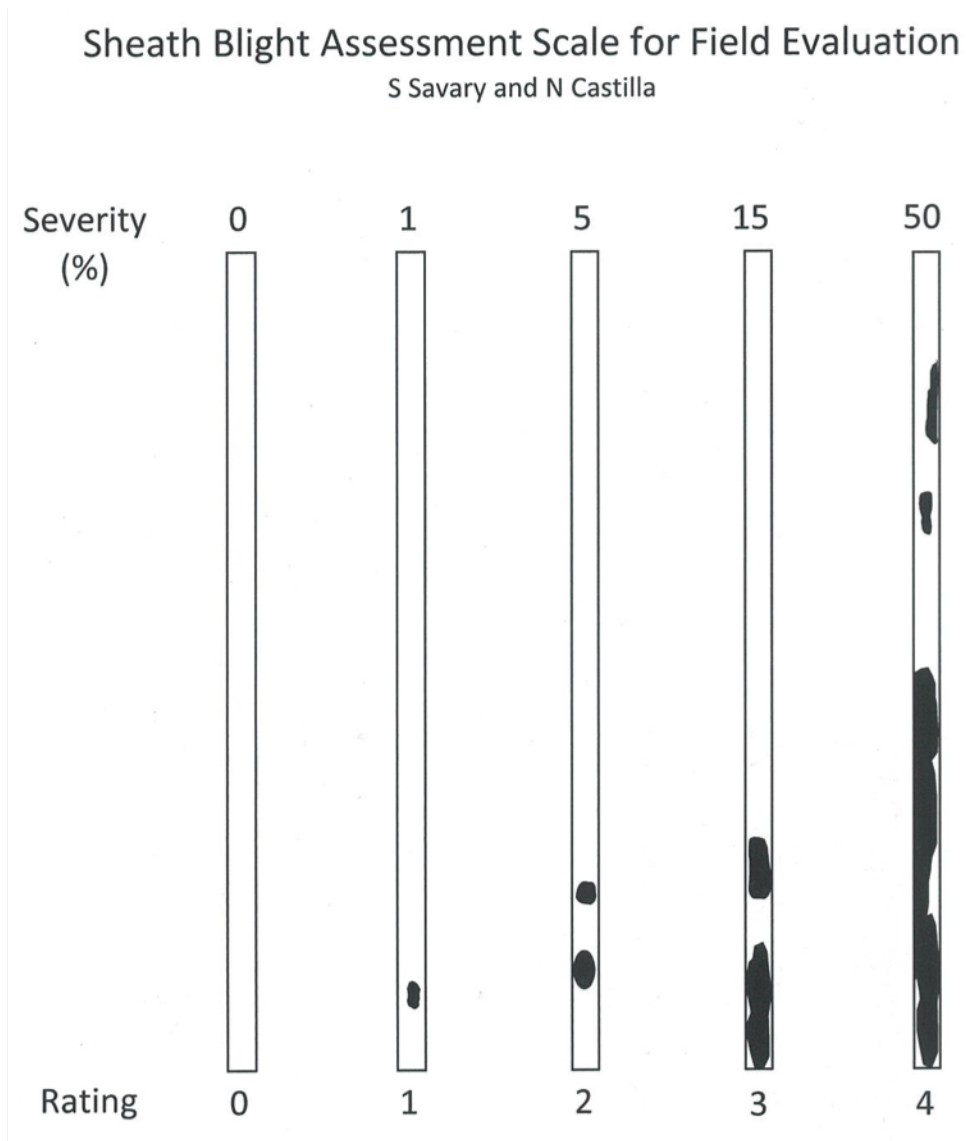
List of Figures

Figure 1: IRRI sheath blight field severity rating scale where, 0 - 0%, 1 - 1%, 2 - 5%, 3 - 15%, 4 - 50%, 5 - >50%.