

Optical SEM Local Nadaraya–Watson Smoother Comparison

The optical SEM line fields are fitted with local Nadaraya–Watson smoothers on the doubled-angle embedding. Hyperparameters are selected by spatially blocked held-out axial RSS.

Model	Mean RSS	Median RSS	Mean MAE	Median h	Median κ
RBF-von-Mises NW smoother	0.1746	0.17	16.72	10.54	32
RBF NW smoother	0.2206	0.227	19.7	5.74	
Uniform NW smoother	0.2312	0.2379	20.52	14.28	

Table 1: Selected local NW smoother performance across optical SEM datasets.

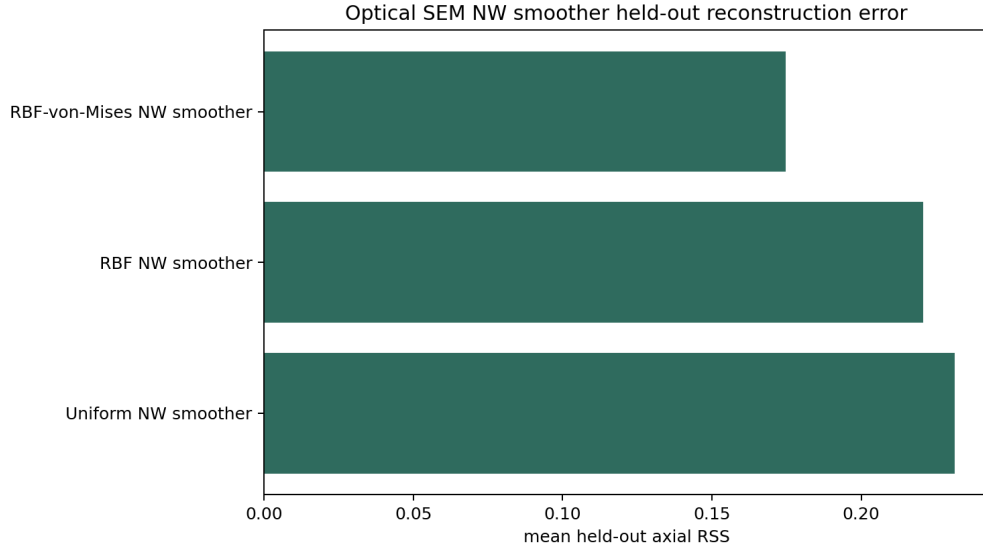


Figure 1: Mean held-out axial RSS for optical SEM local NW smoothers.

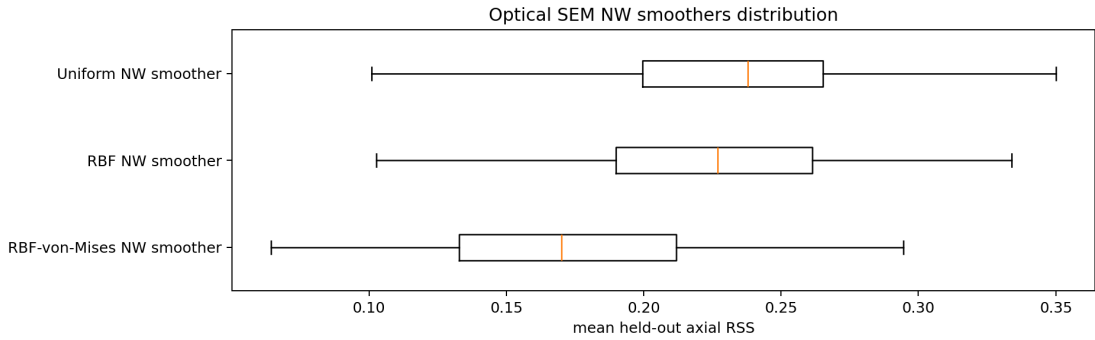


Figure 2: Held-out axial RSS distribution for the selected local NW smoothers.