

Air Leak Tester that is Sophisticated yet Easy-to-Use



AIR LEAK TESTER LS-R701X

Features



Easy-to navigate and intuitive interface with simple menu configuration



Waveform Display of Test pressure and Differential pressure




Mastering feature provides highly accurate test results




User selectable multi-language capability: English, Japanese and Chinese




USB Port for easy test data management

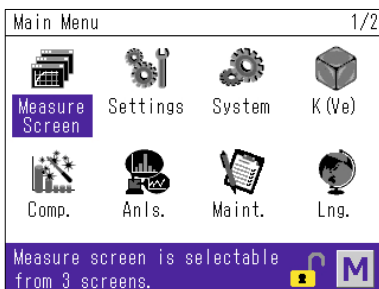

Intuitive operation makes test parameter programming easy.

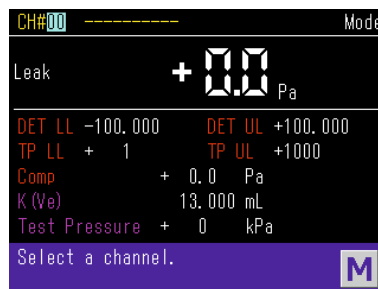


Measurement screens are selectable among 3 depending on the situation.

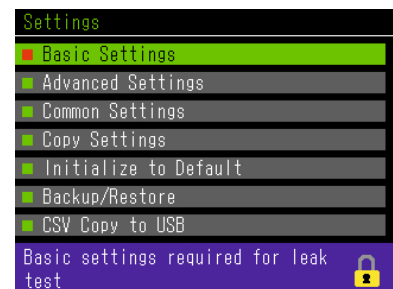

Settings Menu is easy-to-follow. The Guidance Bar at the bottom gives you a simple explanation what the item is.

Pneumatic Circuit

A1:(M:Medium Pressure / L: Low Pressure)

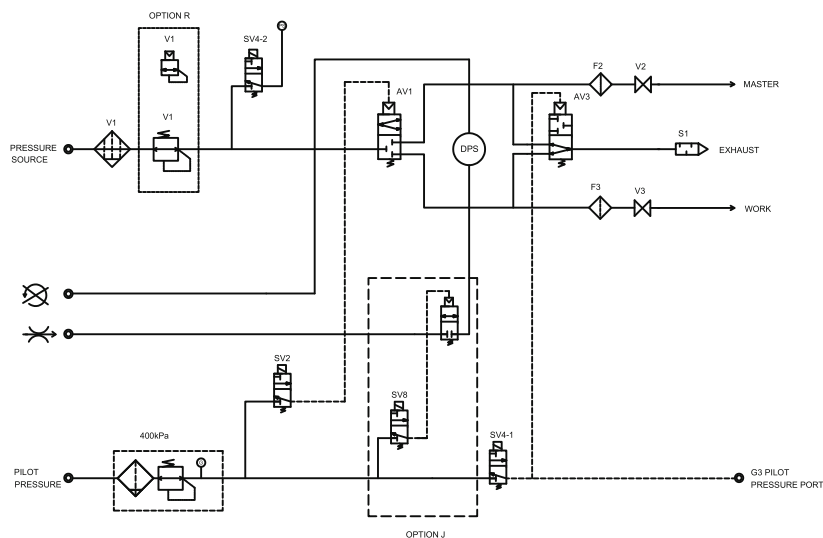


■ Specifications

Differential Pressure Sensor (Standard)	Resolution: Display Range: Accuracy Guaranteed Range: Sensor Range: Sensor Proof Pressure: Reading Accuracy:	0.1 Pa ±999 Pa ±1000 Pa ±2000 Pa 5 MPa ±2.5% of rdg ±1Pa, 50Pa or lower: ±2Pa
Test Pressure Sensor	Reading Accuracy: Temperature Characteristics:	±1% of F.S. ±1 digit (Linearity, Hysteresis and Repeatability) ±0.1 % of F.S. / °C
Display Unit *1	Test Pressure	kPa, MPa (PSI, kg/cm ² , bar, mbar, mmHg, cmHg, inHg)
	Leak *2	Pa, kPa, mL/s, mL/min, L/min, Pa·m ³ /s, E-3 Pa·m ³ /s, Pa/s, Pa/min, *Pa/s, *Pa/min (mmH ₂ O, inH ₂ O, mmHg, in ³ /min, in ³ /d, ft ³ /h)
Leak Display	4 digits, Sampling Rate: 10 times/s	
Leak Limit Range (Standard)	Up to ±999.9 Pa	
Number of Channels	32 channels (#0 to #31)	
Timers	Up to 999.9 s (Resolution: 0.1 s)	
Power Source	100 to 240 VAC ±10% at 50/60 Hz, 70 VA max Fuse: T2.5A 250V Dielectric strength voltage and resistance: 1400 VAC 10 sec, 500 VDC 50 MΩ Internal Solenoid Power Source: 24 VDC	
Test Pressure source	Pressure media: Clean air [The source pressure must be sufficiently higher than the test pressure] Compressed Air Quality Class JIS B 8392-1 (2012) / ISO 8573-1 (2010) [1.4.1] * Excluding high pressure testers.	
Pilot Pressure	Clean air regulated between 400 and 700 kPa	
Port Size	Rc 1/4: Test pressure, WORK and MASTER ports 6 mm quick disconnect fitting: Pilot Pressure	
LCD/TP	3.5 inch color LCD 320 x 240 dot (QVGA)	
Ambient Temperature	Operation Temperature: 5 to 45°C Storage Temperature: -20 to 60°C	
Humidity	80 %RH or less / no dew condensation	
Weight	Approx. 10 kg (Standard model)	
RS232C Serial Communication (D-sub 9 pins)	Input Signal: Start, Stop, etc. Output Signal: Pass, UL Fail, LL Fail, etc.	
	I/F fixed length ID/F fixed length	Test parameters as well as test results are transmitted.
	T/F fixed length	Only test results are transmitted.
	Others	Special formats
USB Port	Test Data	Judgment, Leak, Test pressure, Channel#, Timers, etc.
	Exporting test parameters	csv file
	Test Parameter Backup/Restore, System Backup/Restore, Firmware upgrade	
Calibration / Maintenance Ports	M10 x 1.5 (O ring seal)	
E/P Regulator	Repeatability: ±0.5% of F.S. or less Temperature Characteristics: ±0.16% of F.S. / °C	
Standard Accessories	USB connector cover, AC adapter, Inspection Record of the product, Calibration Certificate of the standard, Operation Manual CD	
Environmental Conditions (IEC 61010-1)	Over voltage category II Pollution degree 2 Altitude 2000 m or lower	Protection class I Place to use: Indoor

■ LS-R701X (ABC.D)

A	Pneumatic Circuit	Intelligent 1 Pneumatic Circuit		A1	Large flow circuit with great sensor protection features
B	Test Pressure Range	Precision Regulator Model	Medium	M	Test pressure range: 50 to 800 kPa (PS 1 MPa, Regulator: 0.8 MPa)
			Low	L	Test pressure range: 10 to 100 kPa (PS 100 kPa, Regulator: 200 kPa)
			Micro Low	L02	Test pressure range: 5 to 20 kPa (PS 20 kPa, Regulator: 200 kPa)
			Vacuum	V	Test pressure range: -5 to -100 kPa (PS -100 kPa, Regulator: -100 kPa)
		EP Regulator Model	Medium	MR	Test pressure range: 50 to 800 kPa (PS 1 MPa, Regulator: 0.9 MPa)
			Low	LR	Test pressure range: 10 to 95 kPa (PS 100 kPa, Regulator: 100 kPa)
			Micro Low	L02R	Test pressure range: 5 to 20 kPa (PS 20 kPa, Regulator: 150 kPa)
			Vacuum	VR	Test pressure range: -5 to -75 kPa (PS -100 kPa, Regulator: -80 kPa)
C	Options	Blow Orifice $\Phi 1.2$		F1	Required when the test pressure is -10 kPa to -4 kPa.
		E/P Regulator Ready (With EP Connector)		R1	Can be selected for a tester with Precision Regulator.
		With High-Precision Sensor		S	Sensor accuracy: 1% of rdg ± 1 Pa (50 Pa or less: ± 2 Pa)
D	Units and Others		UX2	All units (For overseas only)	

■ External Appearance

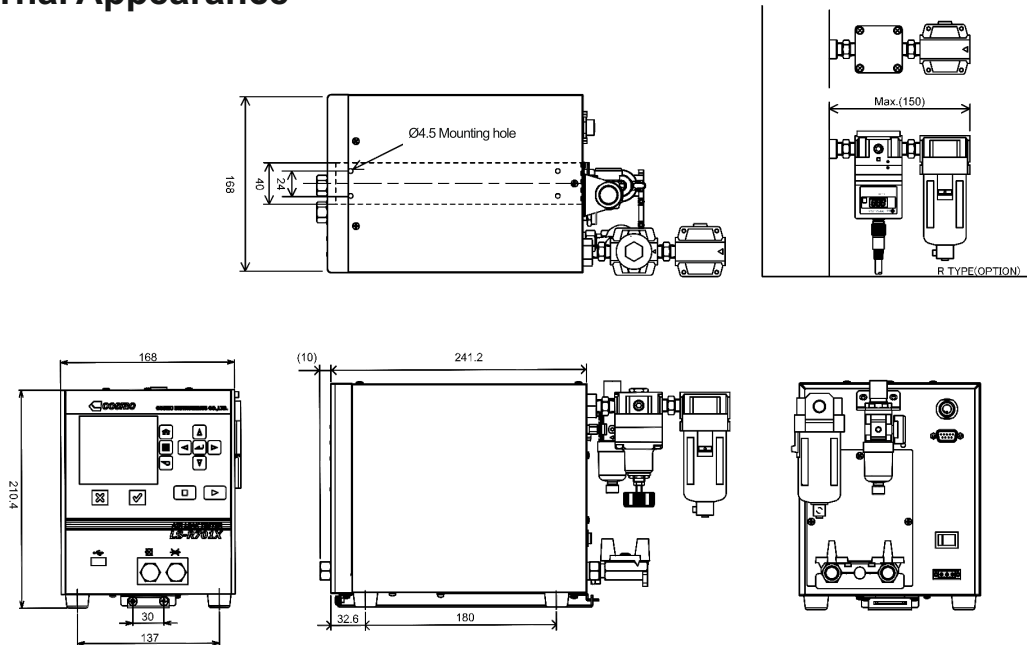

* Information in this document is correct as of May 2025. The specifications are subject to change without prior notice.

Cosmo Instruments Co., Ltd.

<http://www.cosmo-k.co.jp/>

Head Office:

2974-23 Ishikawa, Hachioji, Tokyo 192-0032

Phone: +81-(0)42-642-1357 Fax: +81-(0)42-646-2439

Overseas Contact:

China, USA, Korea, Taiwan, Malaysia, Thailand, Indonesia

Vietnam, India, Brazil, Germany, Australia, Mexico