

PRODUCT INFORMATION

QUICK LEAK TESTER

New

Economic

Quick Leak Tester that is Economic yet uncompromised in Accuracy



QUICK LEAK TESTER

DP-340BA-PT-110FC

Proof Tested at
less than

1s

■ Features

- Big Bright User-friendly Display
- Traceability certification-Inspection report
- Quick leak tester ideal for acquiring ISO9001 and other Standards

■ Specifications

TYPE		DP-330BA-PT-110-FC
Display Digits		4.5 digit function 0000 ~ ± 19999
Measurement Fluid		Air or Non corrosive fluid
Pressure Type		Differential Pressure Gauge Pressure
Material of the area to receive pressure		Diaphragm SUS-400
Measurement Range		0 ~ 1kPa
Optional Range		0 ~ ±1kPa, 0 ~ 2kPa
Proof Pressure		5 Mpa
Accuracy Linearity Hysteresis Repeatability		±0.15% of F.S.
Temperature Characteristics	Zero	±0.03% of F.S./°C
	Span	±0.03% of F.S./°C
Allowable		1MPa Option 5MPa
99% Step Speed of Response		350ms Max
Power Supply Voltage Consumption Current		±15VDC 25mA
Weight		1.3 kg
Pressure Measurement Port		Rc-1/8
Temperature Range		5 ~ 40°C

■ Application

Specially designed
for quick leak Testing


Suitable for small
components

Increased
Productivity rate

Features Set: Front Panel

● Upper/lower limit setting feature

This feature allows four limits to be set: HH, HI, LO and LL. Detailed judgment criteria are supported. Each limit corresponds to its own external output signal.

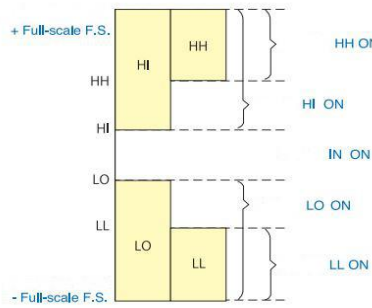

● LED display brightness control feature


The brightness of the display can be adjusted in seven steps. Use this function to adjust for the conditions of the operating environment.

● 3.5/4.5-digit display switchover feature

The display can be switched from 3.5 digits (1999) to 4.5 digits (1999.9) to extend the resolution by one decimal place. This function is useful for observing small changes and trends in detail.

● Digital filter feature

With the moving average-based digital filter, the user can suppress reading fluctuations. This filter can be adjusted in three steps.

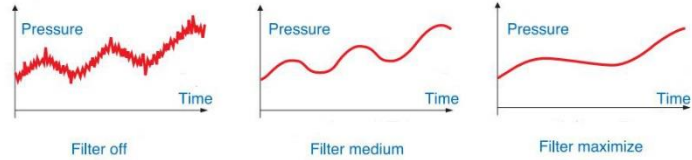

● Zero point adjustment feature


The user can simply press the button once to make a zero point adjustment. Naturally, this function can also be controlled externally.

● Channel feature

This function provides 10 channels, thereby enabling the user to apply different settings by simply switching from one channel to another.


● Auto-zero feature

With this function, the user can define the current measured value to be zero in order to measure relative changes. This function is useful for observing changes in rates.

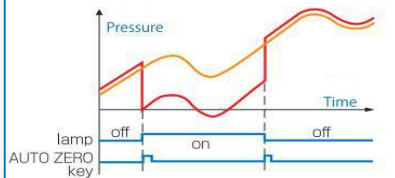


● Various hold feature

The user can select one function to use from the reading hold, peak hold, and bottom hold functions. With these functions, the user need never miss any crucial values during measurement.

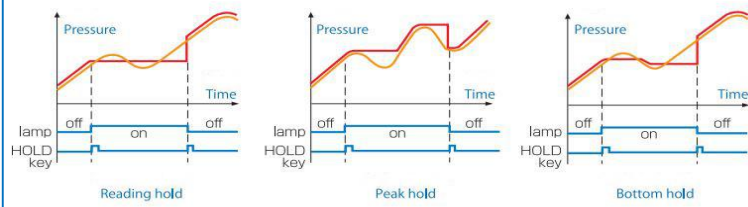

Features Set: Front Panel

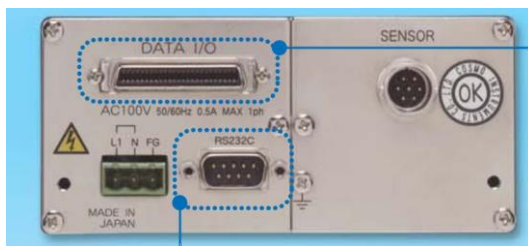

● External I/O signal

Various I/O signals for connecting gauges to sequencers or PLCs.

● BCD output signal

Parallel BCD output is also available by default.

● RS-232C output

Serial communication is available through the RS-232C port, thereby enabling various commands to be sent from PLC.

Cosmo Instruments (I) Pvt. Ltd.

Pune Office:

Plot No. 38 & 39, Phase-III, Chakan Industrial Area
Post: Nihoje, Taluka: Khed, Dis: Pune – 410501
Ph: 2069332345

<http://www.cosmo-k.co.jp>

Head Office:

Plot No.261, Sector 8,
HSIIDC, IMT Manesar
Gurgaon- 122-050 (Haryana)

For Enquiry Contact:

Gurgaon Office: +91-9910337661

Bangalore Office: +91-9731232178

Pune Office: +91-9923805058

Chennai Office: +91-9994636915

Coimbatore Office: +91-9972315164

Pithampur Office: +91-8959591357