Assignemnt-4

Q.1 Create a pool on the DHCP Server router, named “xyz” and follow all the requirements.

1. Client should use the DNS server with the IP address: 1.2.3.4

2. Client should use the network 192.168.10.0/24

3. Client should renew their IP address a er every 3 hours

4. Make sure, Router does not respond to any BOOTP

5. Configure the Client so that it will obtain IP from DHCP server.

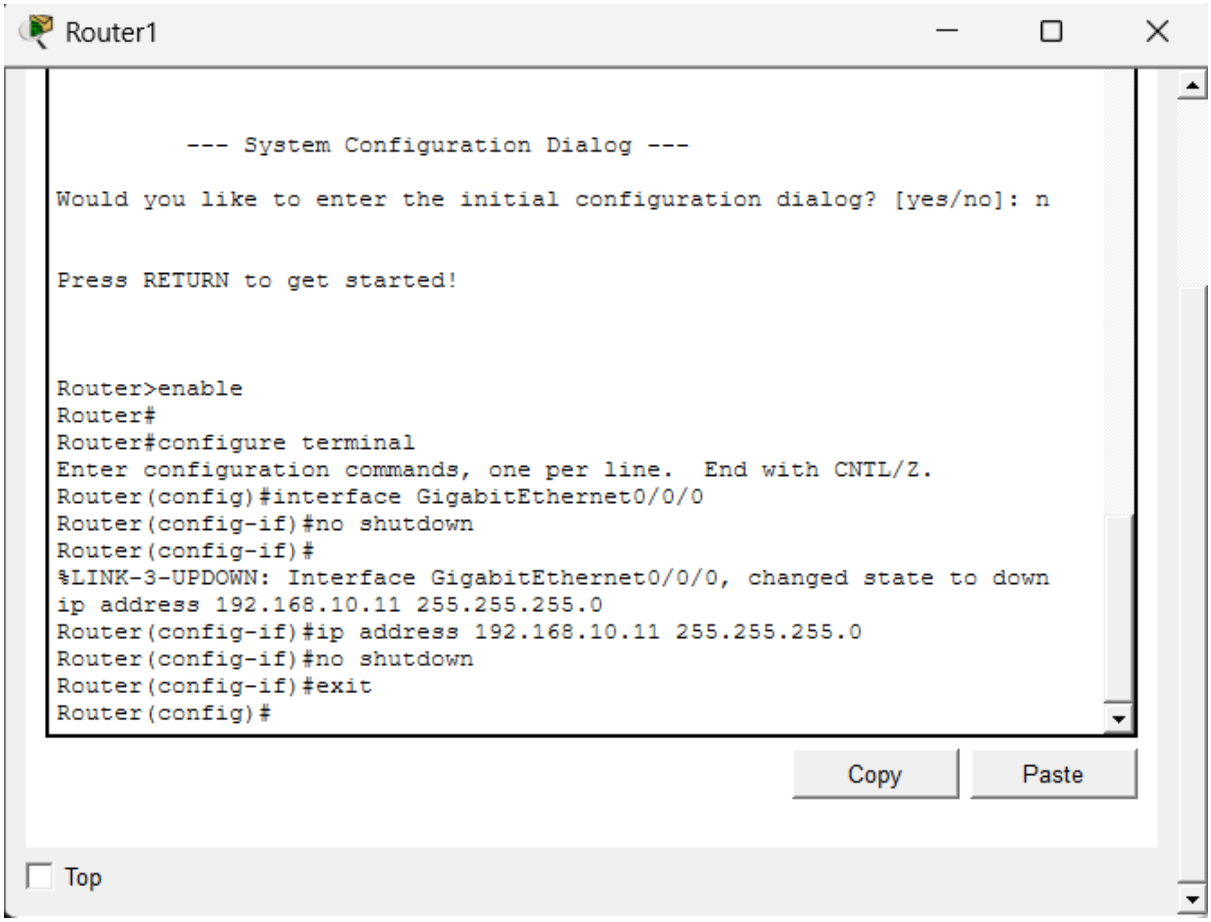

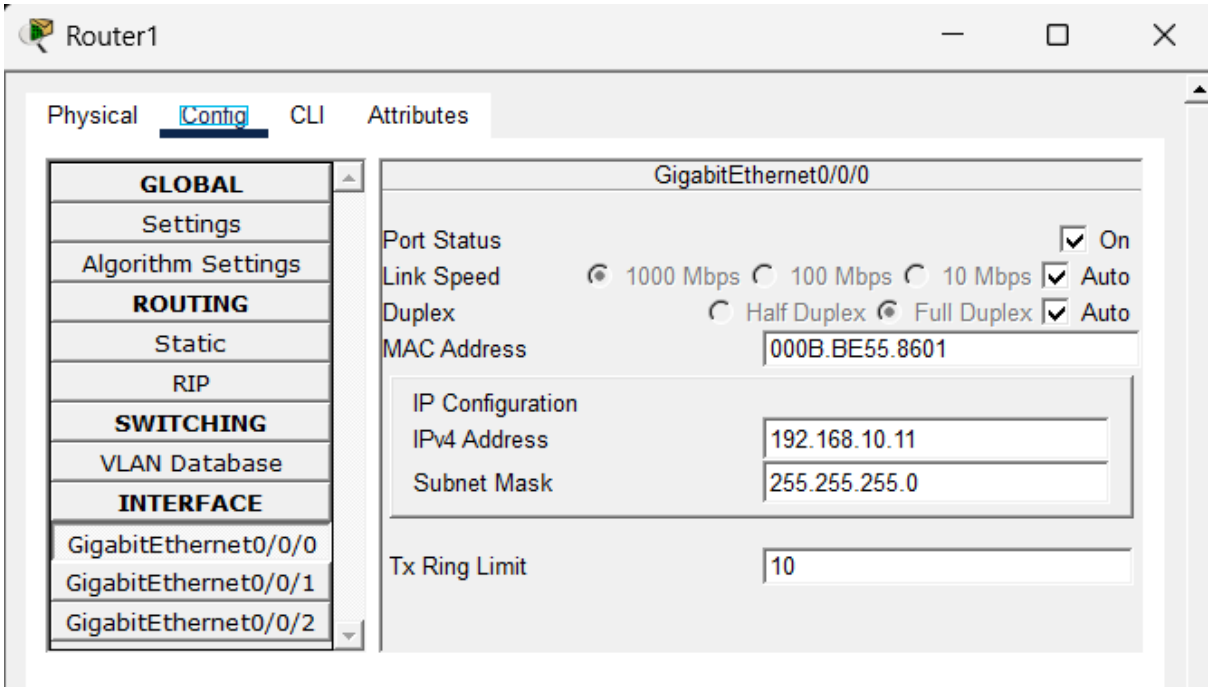
Router1
Physical
Config
CLI
Attributes
GLOBAL
Settings
Algorithm Settings
ROUTING
Static
RIP
SWITCHING
VLAN Database
INTERFACE
GigabitEthernet0/0/0
GigabitEthernet0/0/1
GigabitEthernet0/0/2
GigabitEthernet0/0/0
Port Status
On
Link Speed
1000 Mbps
100 Mbps
10 Mbps
Auto
Duplex
Half Duplex
Full Duplex
Auto
MAC Address
000B.BE55.8601
IP Configuration
IPv4 Address
192.168.10.11
Subnet Mask
255.255.255.0
Tx Ring Limit
10

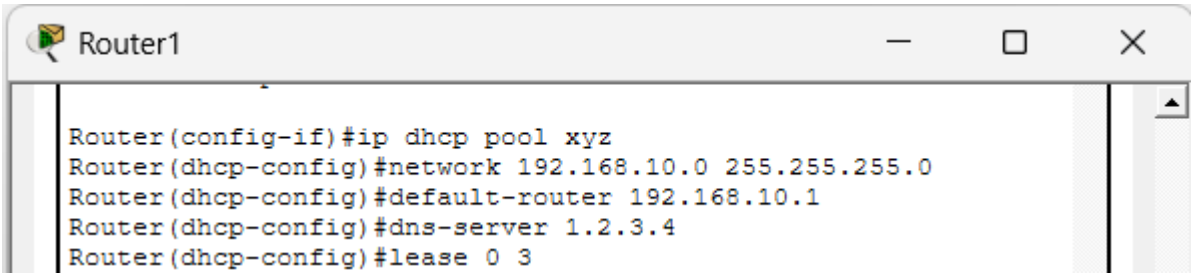
Router1
Router(config-if)#ip dhcp pool xyz
Router(dhcp-config)#network 192.168.10.0 255.255.255.0
Router(dhcp-config)#default-router 192.168.10.1
Router(dhcp-config)#dns-server 1.2.3.4
Router(dhcp-config)#lease 0 3

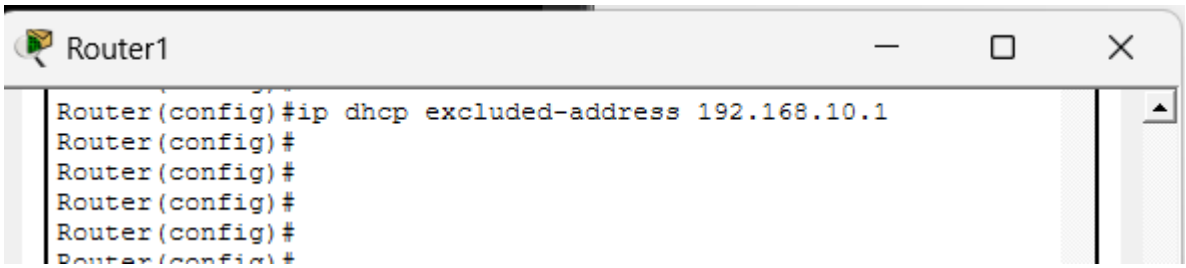
Router1
Router(config)#ip dhcp excluded-address 192.168.10.1
Router(config)#
Router(config)#
Router(config)#
Router(config)#

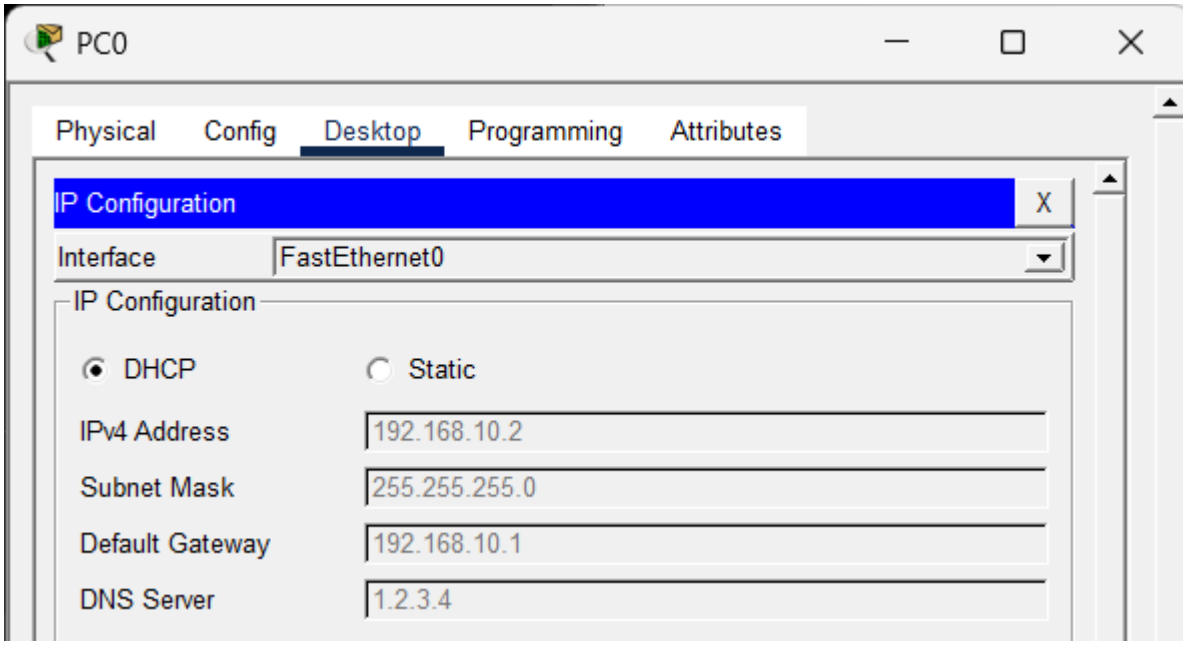
PC0
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.10.2
Subnet Mask
255.255.255.0
Default Gateway
192.168.10.1
DNS Server
1.2.3.4

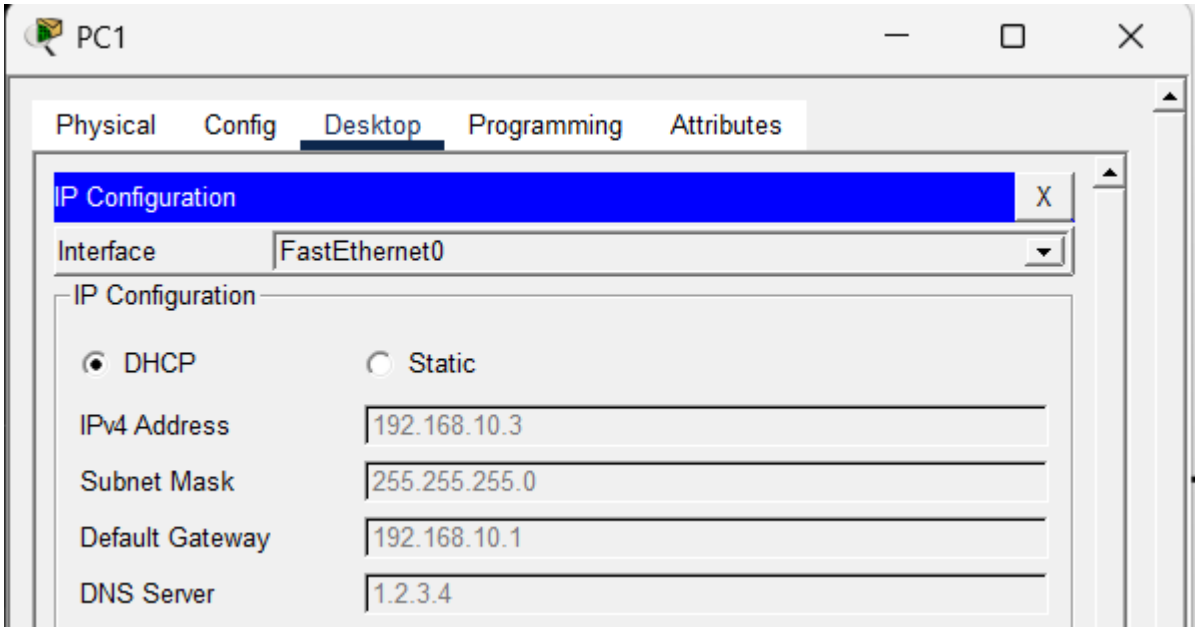
PC1
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.10.3
Subnet Mask
255.255.255.0
Default Gateway
192.168.10.1
DNS Server
1.2.3.4

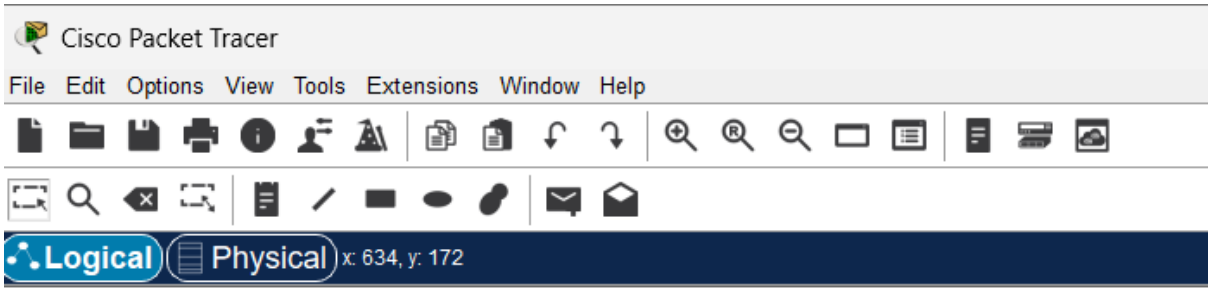
Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 634, y: 172

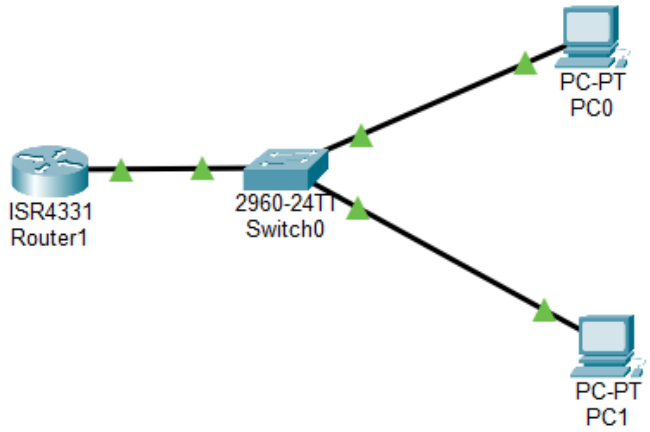
PC-PT
PC0
ISR4331
Router1
2960-24TT
Switch0
PC-PT
PC1

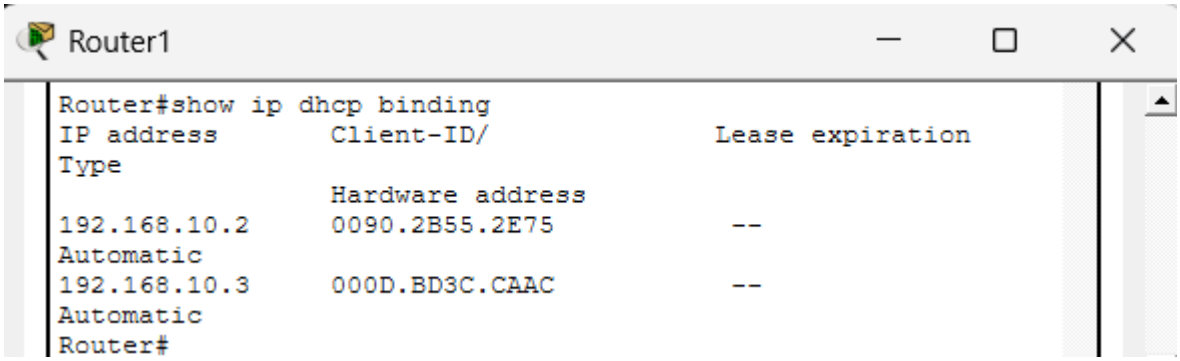
Router1
Router#show ip dhcp binding
IP address Client-ID/ Lease expiration
Type
Hardware address
192.168.10.2 0090.2B55.2E75 --
Automatic
192.168.10.3 000D.BD3C.CAAC --
Automatic
Router#

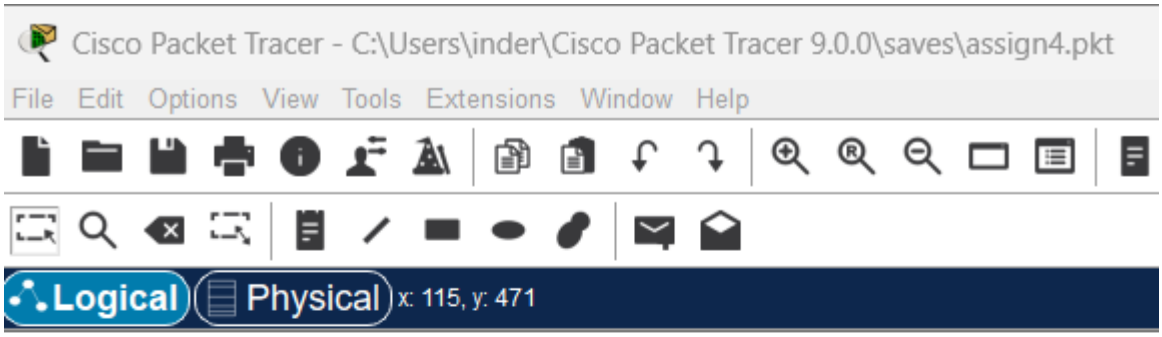
Cisco Packet Tracer - C:\Users\inder\Cisco Packet Tracer 9.0.0\saves\assign4.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 115, y: 471

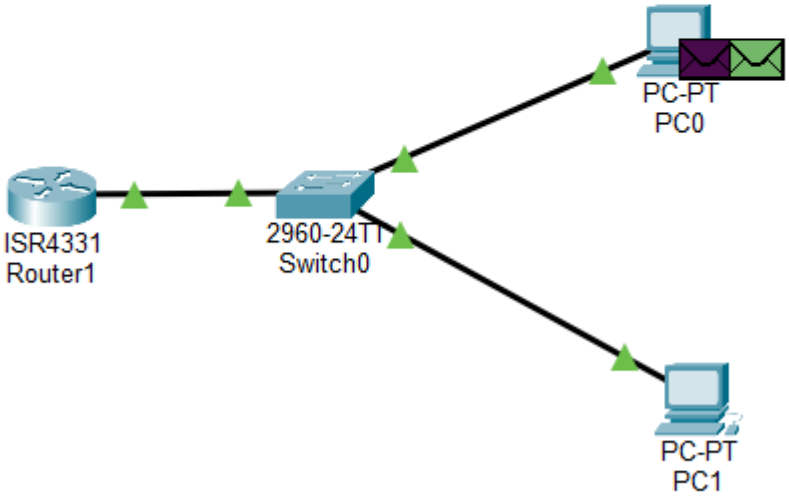
PC-PT
PC0
ISR4331
Router1
2960-24TT
Switch0
PC-PT
PC1

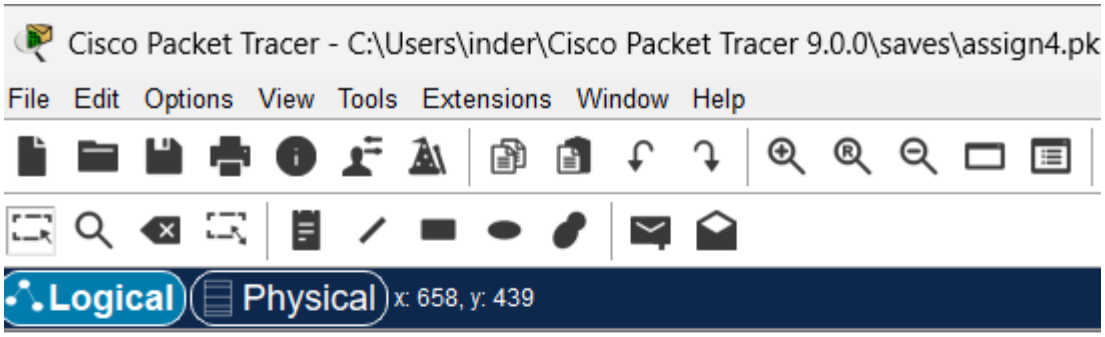
Cisco Packet Tracer - C:\Users\inder\Cisco Packet Tracer 9.0.0\saves\assign4.pk
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 658, y: 439

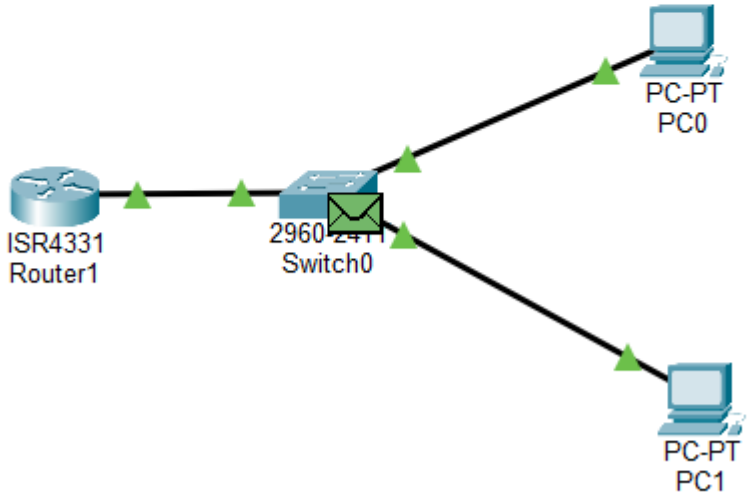
PC-PT
PC0
ISR4331
Router1
2960-24TT
Switch0
PC-PT
PC1

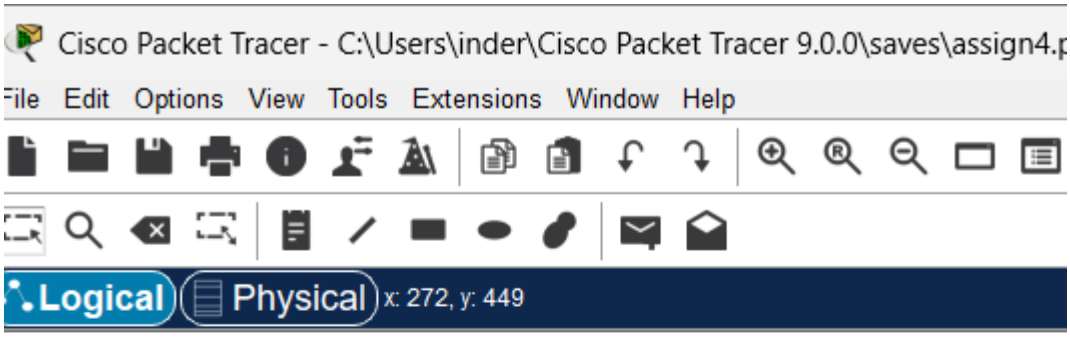
Cisco Packet Tracer - C:\Users\inder\Cisco Packet Tracer 9.0.0\saves\assign4.p
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 272, y: 449

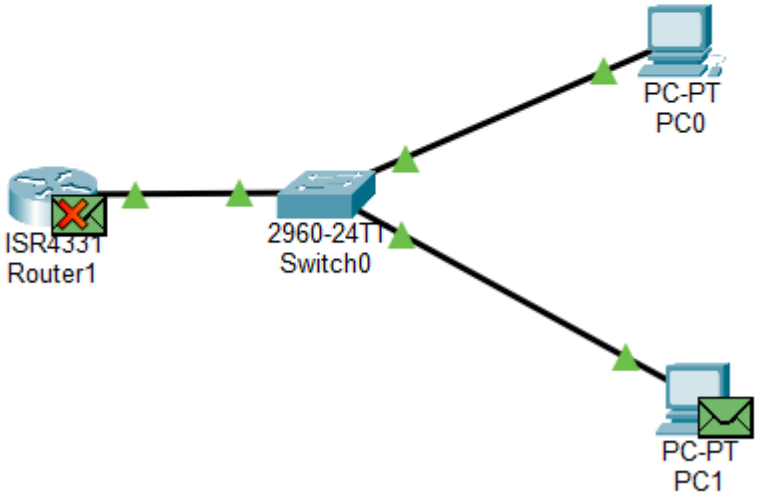
PC-PT
PC0
ISR4331
Router1
2960-24TT
Switch0
PC-PT
PC1

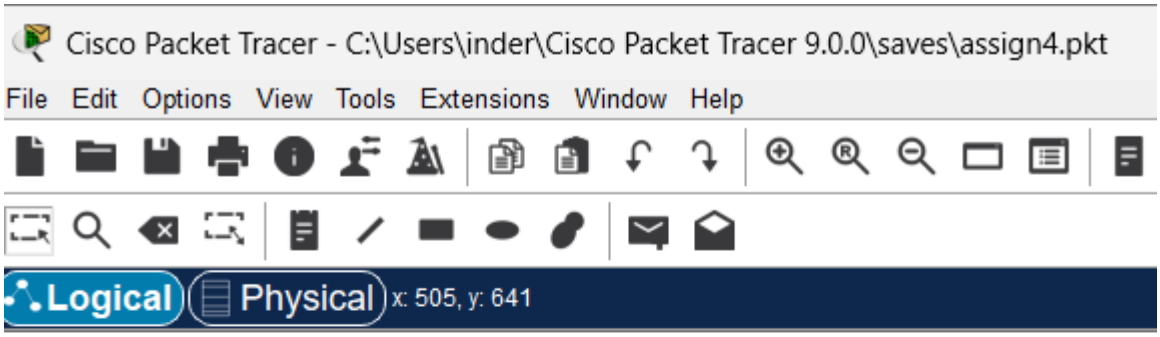
Cisco Packet Tracer - C:\Users\inder\Cisco Packet Tracer 9.0.0\saves\assign4.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 505, y: 641

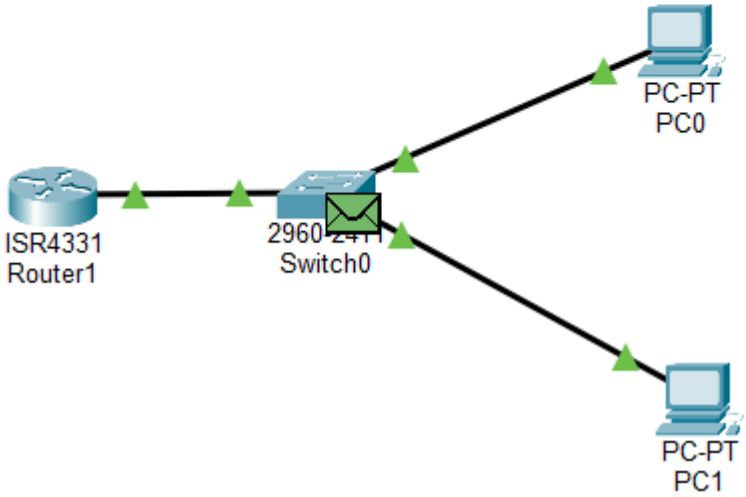
PC-PT
PC0
ISR4331
Router1
2960-2411
Switch0
PC-PT
PC1

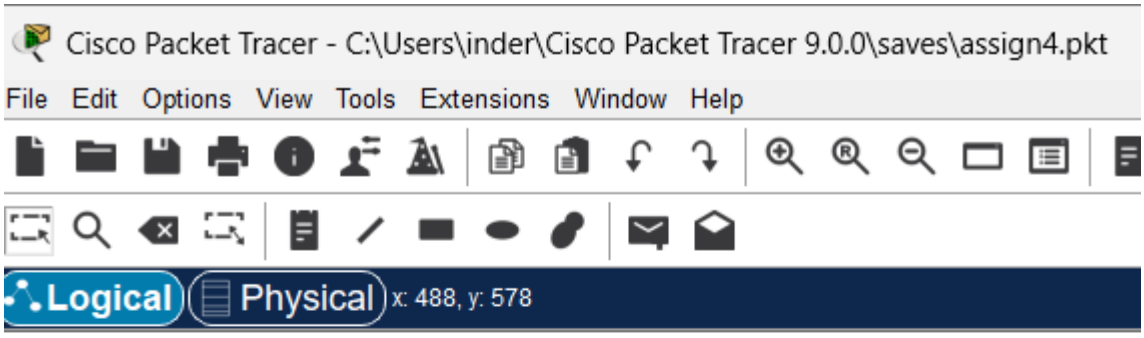
Cisco Packet Tracer - C:\Users\inder\Cisco Packet Tracer 9.0.0\saves\assign4.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 488, y: 578

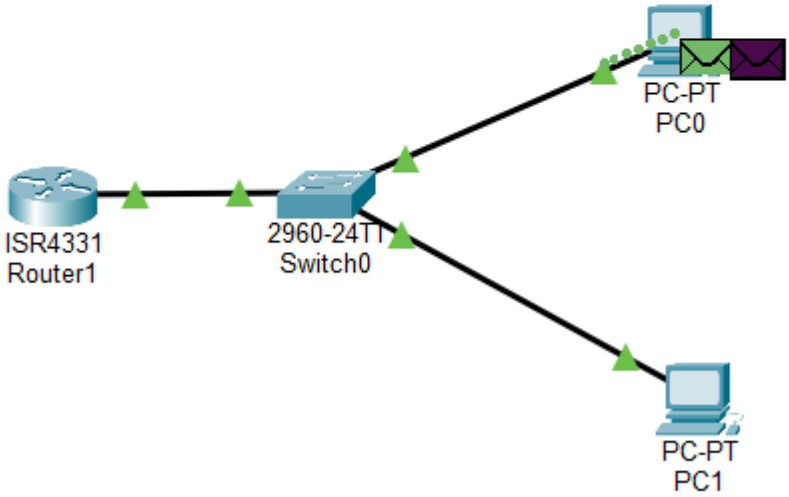
PC-PT
PC0
ISR4331
Router1
2960-24TT
Switch0
PC-PT
PC1

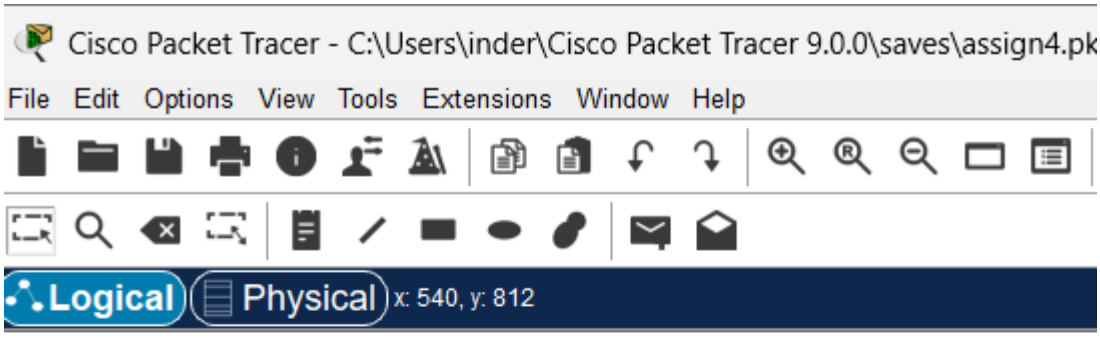
Cisco Packet Tracer - C:\Users\inder\Cisco Packet Tracer 9.0.0\saves\assign4.pk
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 540, y: 812

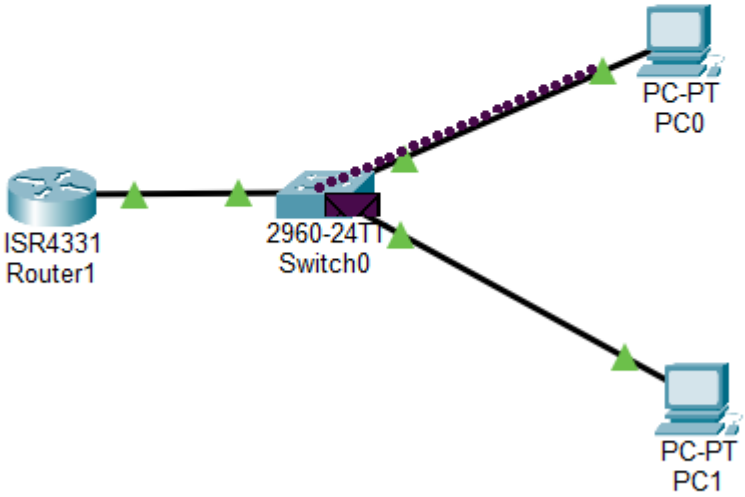
PC-PT
PC0
ISR4331
Router1
2960-24TT
Switch0
PC-PT
PC1

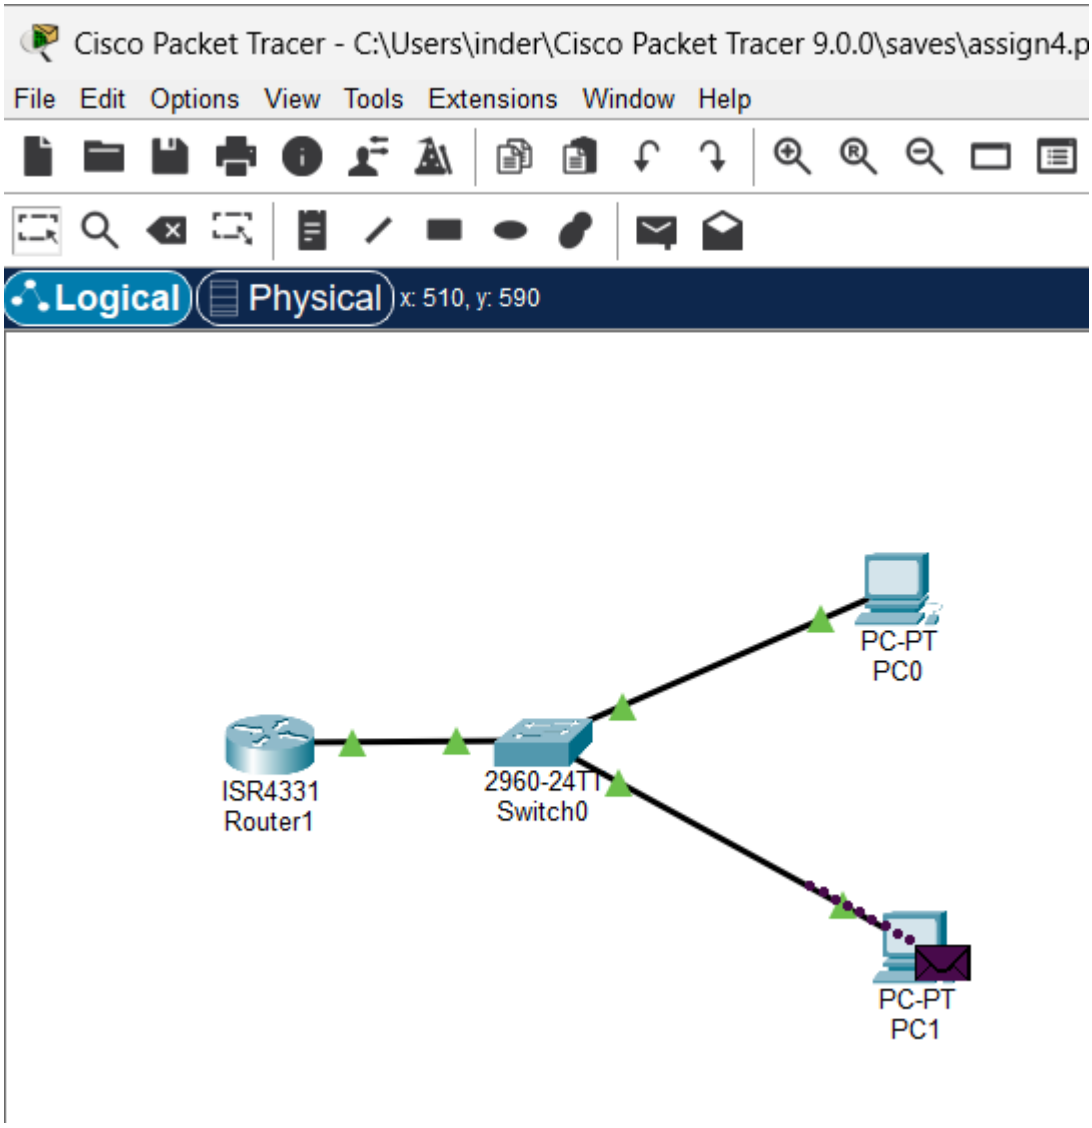
Cisco Packet Tracer - C:\Users\inder\Cisco Packet Tracer 9.0.0\saves\assign4.p
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 510, y: 590
PC-PT
PC0
ISR4331
Router1
2960-24TT
Switch0
PC-PT
PC1

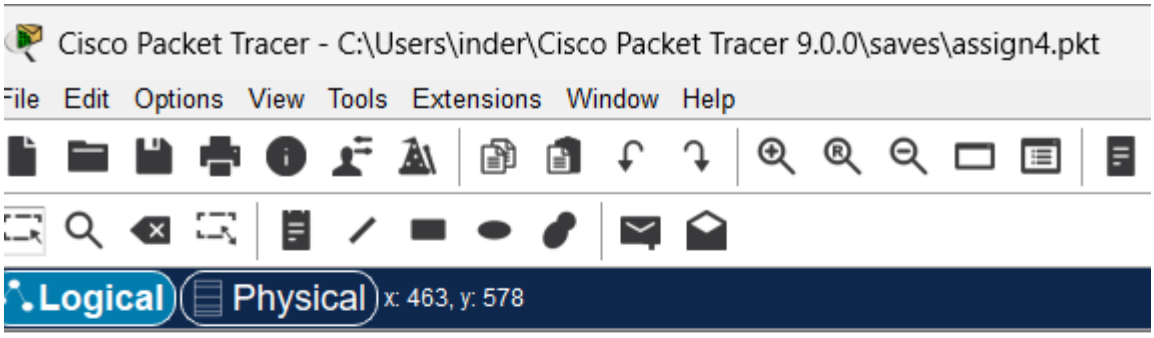
Cisco Packet Tracer - C:\Users\inder\Cisco Packet Tracer 9.0.0\saves\assign4.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 463, y: 578

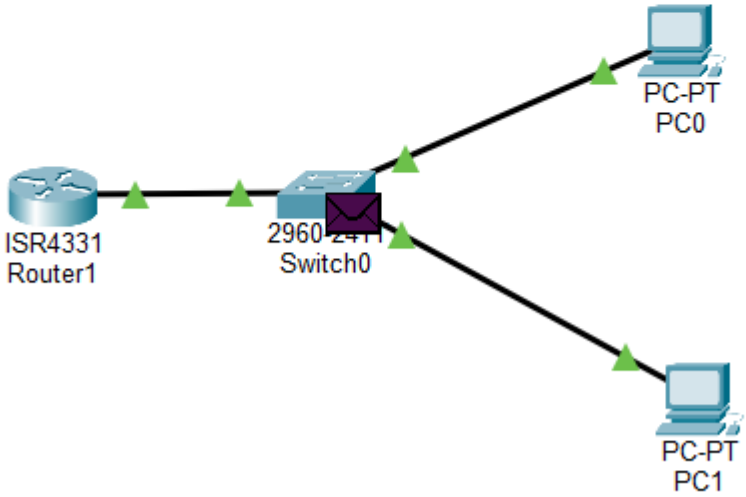
PC-PT
PC0
ISR4331
Router1
2960-24TT
Switch0
PC-PT
PC1

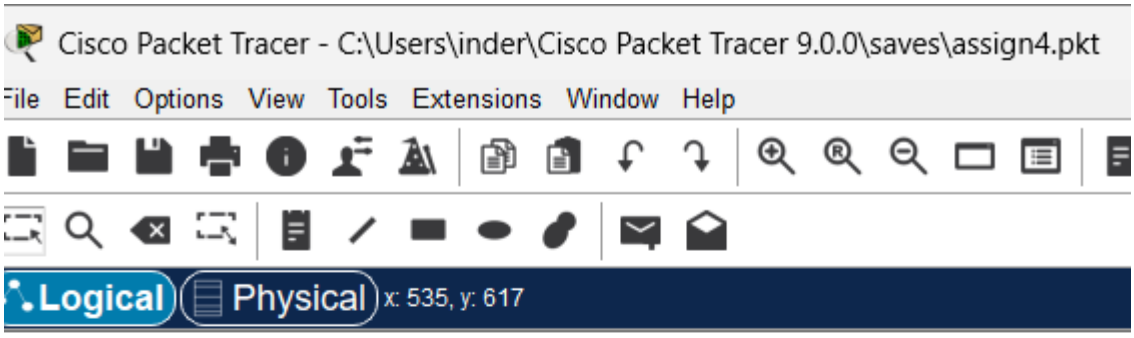
Cisco Packet Tracer - C:\Users\inder\Cisco Packet Tracer 9.0.0\saves\assign4.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 535, y: 617

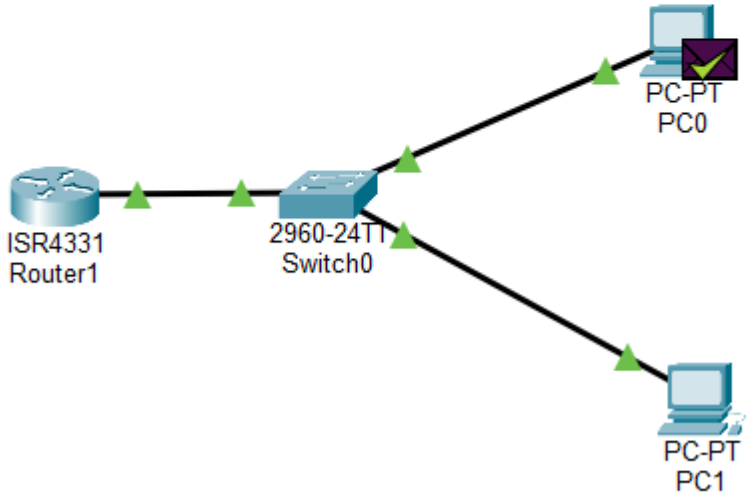
PC-PT
PC0
ISR4331
Router1
2960-24TT
Switch0
PC-PT
PC1

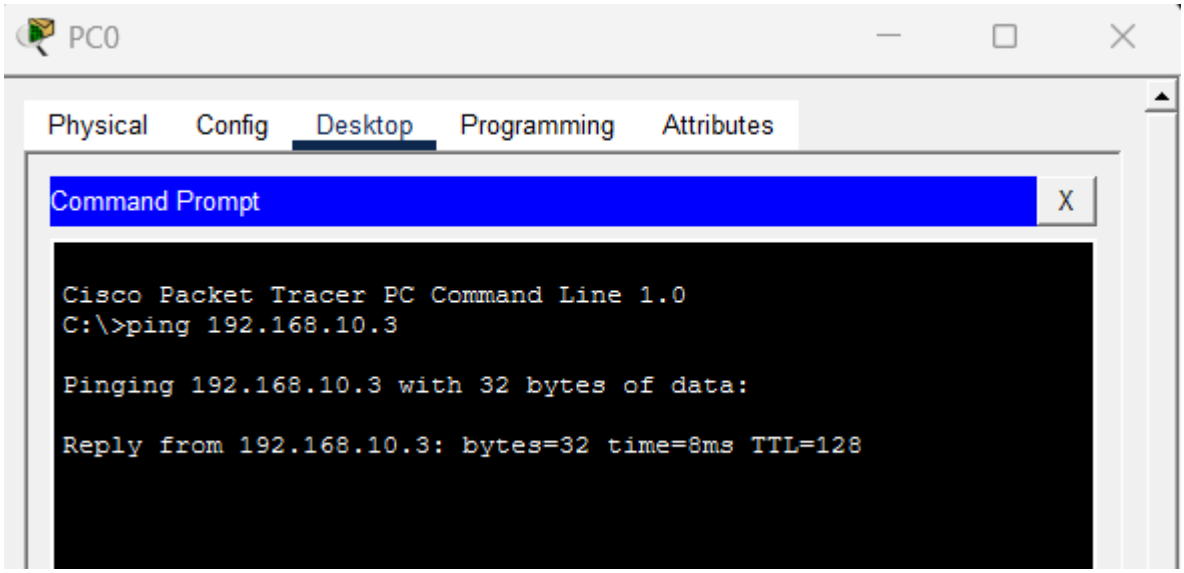
PC0
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.3
Pinging 192.168.10.3 with 32 bytes of data:
Reply from 192.168.10.3: bytes=32 time=8ms TTL=128