

FINETUNE UniMax UM-325AX

Tri-band 2x2 MIMO WiFi-6 Cloud & Controller Managed Access Point
Datasheet



Features

High Data Rate, up to 5400Mbps

UM-325AX supports total aggregated link speed of 4800Mbps. It offers 1148 Mbps in 802.11n 40MHz channel in 2.4GHz band and 2400 Mbps in 802.11ax 160MHz channel in 5GHz band. High link speed translates into very high throughput which results into great internet browsing experience for users.

Multi-user Multiple Input and Multiple Output (MU-MIMO)

UM-325AX AP supports MU-MIMO, allowing efficient utilization of available RF spectrum for data download. It also helps in providing a very high number of concurrent users connected with enough upload and download bandwidth.

Self-configuration, plug and play

All Indio series APs are self-configurable and pure plug-and-play device. As soon as Indio AP is powered on and connected to the network, it downloads configuration from cloud or controller appliance and becomes operational within minutes.

Enterprise level security and Hotspot mode

All Indio series APs come with support for enterprise level wireless security along with support for hotspot mode or guest access. Different level of security and VLAN isolation helps in delivering secured and seamless connectivity services.

The UM-325AX is a WiFi-6, tri-band, cloud & controller managed full 2x2 MU-MIMO 802.11ax/ac Wave 2 access point. Designed for high density deployments in indoor locations like airports, conference centers, convention halls, etc the access point offers performance, enterprise-grade security, and simple management.

Indio UM-325AX delivers a maximum 3.9Gbps* aggregate frame rate with concurrent 2.4GHz, 5GHz, 6GHz radios. It delivers the high throughput, reliability, and flexibility required by the most demanding business applications like voice and high-definition streaming video in very dense environments.

Key Points:

High-Performance Wireless Connectivity

- Delivers an **aggregate data rate up to 3.9 Gbps**, enabling high-density, high-capacity deployments.
- **Dual-band concurrent radios (2.4 GHz & 5 GHz)** ensure optimized traffic distribution and improved client performance.
- Supports **IEEE 802.11a/b/g/n/ac/ax (Wi-Fi 6)** standards for enhanced efficiency and throughput.
- Up to **574 Mbps** wireless speed using **2x2 SU-MIMO (2SS HE40) 802.11ax** clients.
- **Tx beamforming** boosts signal strength, coverage, and reliability.

Advanced 6 GHz / Wi-Fi 6E Readiness

- Supports **seven 160 MHz channels in the 6 GHz band**, ensuring extremely low latency for high-demand applications.
- Ideal for **HD video streaming, AR/VR**, and real-time interactive workloads.

Intelligent Mesh & RF Optimization

- **Self-configuring, self-healing mesh** allows seamless expansion without additional cabling.
- Autonomous RF algorithms continuously optimize **channel, power, and coverage** for the best client experience.

Location Awareness & Indoor Mapping

- Built-in **GPS receiver** and intelligent algorithms enable autonomous location detection.
- Provides precise **indoor mapping reference data**, improving network planning and asset tracking.

Flexible Deployment & Design

- Supports **ceiling-mount, wall-mount, and desktop** installation for versatile indoor use.
- Integrated **5 dBi omnidirectional antennas** ensure uniform coverage across diverse environments.

Comprehensive Management Options

- Manage via **cloud-based platform** or **on-premise hardware controller**, offering flexibility for all architectures.
- Remote management supported through **HTTP, HTTPS, Secure SSH, Telnet, and SSL**.
- Provides detailed insights such as **AP status, client/station status, system logs, and event notifications**.

Robust Configuration & Backup Tools

- Supports **backup and restore** of configuration files over **TFTP, FTP, or HTML interface**, ensuring quick recovery.
- Simplifies large-scale deployments with streamlined provisioning workflows.

Enterprise-Grade Security & Protocol Support

- Dual-stack **IPv4 / IPv6** ensures compatibility with modern network infrastructures.
- Fully compliant with enterprise wireless and security standards.

AP Characteristics

AP throughput and Concurrent Users	3600Mbps; 256 users
Radios (built-in)	2.4GHz:802.11b/g/n/ax; 5GHz: 802.11a/n/ac/ax; 6GHz: 802.11a/n/ac/ax
Radio Operations modes	WiFi Access Point, Mesh
AP Managed	Cloud Controller Appliance managed & Stand-alone mode
Antenna	Inbuilt 5dBi omnidirectional antennas
Interface	a/b/g/n/ac WiFi certified
PoE	48V PoE+
Power Consumption	24W max
Power Source	Power-over-Ethernet: 802.3af/at or Proprietary 48V IEEE 802.11e Compliant Source Active Ethernet (PoE)
2.4GHz Output Power	24dBm
5.8GHz Output Power	26dBm
6 GHz Output Power	28dBm
Ports	WAN- 1x10/100/1000/2500Mbps LAN- 1x10/100/1000/2500Mbps Micro B USB Kensington security slot
Chipset	Qualcomm® 1Ghz Quad-Core CPU with dedicated NSS
Memory	512MB
Flash	32MB
Interfaces	1xLAN, 1xWAN
Reset Button	1
DC	12V – 2A DC

Wireless

WiFi Standards	IEEE 802.11 a/b/g/n/ac/ax; HE20/40/80/160; A-MPDU, A-MSDU;
Supported Rates	TWT(Target Wait Time) 2.4GHz: Max 1200Mbps 5GHz: Max 2400Mbps 6GHz: Max
Modulation but	BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM, 1024 QAM
MIMO	2.4GHz: 2x2; 5GHz: 2x2 ;6GHz:2x2
Spatial Streams	2
Security	WPA/WPA2
Frequency Radio	2.4GHz: 2400 MHz ~ 2482 MHz 5GHz: 5150 MHz ~ 5250 MHz, 5250 MHz ~ 5350 MHz, 5470 MHz ~ 5725 MHz, 5725MHz ~ 5850MHz
Other Features	WMM, Power Save, 802.11r/k/v Hotspot Service Captive Portal WISPr
Environmental & Physical Data	
Operating Temperature	-20°C~60°C
Humidity	5~95%
Mounting	Ceiling/Wall mount

Supported Frequency Bands

- 2.400 to 2.4835 GHz ISM
- 5.150 to 5.250 GHz U-NII-1
- 5.250 to 5.350 GHz U-NII-2
- 5.470 to 5.725 GHz U-NII-2E
- 5.725 to 5.850 GHz U-NII-3/ISM
- 5.850 to 5.895 GHz U-NII-4
- 5.925 to 6.425 GHz U-NII-5
- 6.425 to 6.525 GHz U-NII-6
- 6.525 to 6.875 GHz U-NII-7
- 6.875 to 7.125 GHz U-NII

Ordering Information

Part No.	UM-325AX
-----------------	----------

Certifications

EN 60950-1	Safety
WPC	Yes
OpenWiFi	Compliant
Passpoint	Compliant

Networking

Management Platform	Indio Cloud On-premise Controller
IP	IPv4 / IPv6
VLAN	802.1Q (static and dynamic using Radius) Port based
802.1x	Authentication and Supplicant
Tunnels	VPN GRE

Performance Capacity

Peak Data Rates	2.4GHz- 1148 Mbps 5GHz- 2402 Mbps
Client Capacity	512+ Concurrent devices
SSID	16

Controller Software

Installation	Cloud or On-premise managed
Network Management	WLAN Controller Appliance, WLAN Cloud Controller Firmware Management
Authentication	RADIUS authentication, 802.1x, PSK, SAE
Rate Limiting	Per Client, Per SSID, Dynamic Rate Limiting MAC Authentication MAC Filtering Firewall
Guest Portals	Indio Cloud portals Click- through, Data Capture, SMS/OTP, Payment Gateway, Social-Media, Voucher
Troubleshooting	syslog, ping, traceroute, speed-test
SNMP	No
Time Sync	NTP
Data Offload	Yes
Client Presence / Location API	Yes

Certifications

- UL2043 plenum rating
- Wi-Fi Alliance (WFA)*:
 - Wi-Fi CERTIFIED a, b, g, n, ac
 - Wi-Fi CERTIFIED 6E (ax, 6GHz)
 - WPA, WPA2 and WPA3 - Enterprise with CNSA option,
 - Personal (SAE), Enhanced Open (OWE)
 - WMM, WMM-PS, Wi-Fi Vantage, W-R Agile Multiband
 - Wi-Fi Location
 - Passpoint (release 2)

Accessories

UM-PoE-30W	30W PoE Injector (On- demand)
UM-DC-12V	12V, 2A DC Power Supply (On-demand)

2.4GHz Table

Operating Band	Operating Mode	Data Rate	TX Power	RX Sensitivity
2.4 GHz	802.11b	1 Mb/s	27 dBm	-96 dBm
		2 Mb/s	27 dBm	-93 dBm
		5.5 Mb/s	27 dBm	-91 dBm
		11 Mb/s	27 dBm	-89 dBm
		6 Mb/s	27 dBm	-91 dBm
		9 Mb/s	27 dBm	-90 dBm
2.4 GHz	802.11g	12 Mb/s	27 dBm	-88 dBm
		18 Mb/s	26 dBm	-87 dBm
		24 Mb/s	26 dBm	-84 dBm
		36 Mb/s	26 dBm	-81 dBm
		48 Mb/s	25 dBm	-76 dBm
		54 Mb/s	25 dBm	-75 dBm
		MCS0/8	27/27 dBm	-91/91 dBm
		MCS1/9	27/27 dBm	-88/88 dBm
2.4 GHz	802.11n (HT20)	MCS2/10	26/26 dBm	-85/85 dBm
		MCS3/11	26/26 dBm	-82/82 dBm
		MCS4/12	25/25 dBm	-79/79 dBm
		MCS5/13	25/25 dBm	-75/75 dBm
		MCS6/14	25/25 dBm	-73/73 dBm
		MCS7/15	24/24 dBm	-70/70 dBm
		MCS0/8	27/27 dBm	-89/89 dBm
		MCS1/9	27/27 dBm	-86/86 dBm
2.4 GHz	802.11n (HT40)	MCS2/10	26/26 dBm	-83/83 dBm
		MCS3/11	26/26 dBm	-80/80 dBm
		MCS4/12	25/25 dBm	-77/77 dBm
		MCS5/13	25/25 dBm	-73/73 dBm
		MCS6/14	25/25 dBm	-72/72 dBm
		MCS7/15	24/24 dBm	-70/70 dBm

5GHz Table

Operating Band	Operating Mode	Data Rate	TX Power	RX Sensitivity
5 GHz	802.11a	6 Mb/s	26 dBm	-90dBm
		9 Mb/s	26 dBm	-87dBm
		12 Mb/s	26 dBm	-86dBm
		18 Mb/s	26 dBm	-85dBm
		24 Mb/s	25 dBm	-84dBm
		36 Mb/s	25 dBm	-79dBm
		48 Mb/s	25 dBm	-74dBm
		54 Mb/s	26 dBm	-71dBm
5 GHz	802.11n (HT20)	MC50/8	26/26 dBm	-88/-88dBm
		MCS1/9	26/26 dBm	-85/-85dBm
		MCS2/10	25/25 dBm	-83/-83dBm
		MCS3/11	25/25 dBm	-79/-79dBm
		MCS4/12	24/24 dBm	-76/-76dBm
		MCS5/13	24/24 dBm	-72/-72dBm
		MCS6/14	23/23 dBm	-71/-71dBm
		MCS7/15	23/23 dBm	-69/-69dBm
5 GHz	802.11n(VHT20)	MCS0/0	26/26 dBm	-88/-88dBm
		MCS1/1	26/26 dBm	-86/-86 dBm
		MCS2/2	25/25 dBm	-83/-83dBm
		MCS3/3	25/25 dBm	-79/-79dBm
		MCS4/4	24/24 dBm	-77/-77dBm
		MCS5/5	24/24 dBm	-75/-75dBm
		MCS6/6	23/23 dBm	-72/-72dBm
		MCS7/7	23/23 dBm	-70/-70dBm
		MCS8/8	22/22 dBm	-67/-67dBm

5GHz Table

Operating Band	Operating Mode	Data Rate	TX Power	RX Sensitivity
5 GHz	802.11n (HT40)	MCS0/8	26/26dBm	-85/-85dBm
		MCS1/9	26/26dBm	-84/-84dBm
		MCS2/10	25/25dBm	-84/-84dBm
		MCS3/11	25/25dBm	-79/-79dBm
		MCS4/12	24/24dBm	-77/-77dBm
		MCS5/13	24/24dBm	-72/-72dBm
		MCS6/14	23/23dBm	-70/-70dBm
		MCS7/15	23/23dBm	-68/-68dBm
5 GHz	802.11n (VHT40)	MCS0/0	26/26dBm	-85/-85dBm
		MCS1/1	26/26dBm	-82/-82dBm
		MCS2/2	25/25dBm	-79/-79dBm
		MCS3/3	25/25dBm	-77/-77dBm
		MCS4/4	24/24dBm	-74/-74dBm
		MCS5/5	24/24dBm	-70/-70dBm
		MCS6/6	23/23dBm	-68/-68dBm
		MCS7/7	23/23dBm	-67/-67dBm
		MCS8/8	22/22dBm	-64/-64dBm
5GHz	802.11ac (VHT80)	MCS0/0	26/26dBm	-83/-83dBm
		MCS1/1	26/26dBm	-81/-81dBm
		MCS2/2	25/25dBm	-79/-79dBm
		MCS3/3	25/25dBm	-76/-76dBm
		MCS4/4	24/24dBm	-73/-73dBm
		MCS5/5	24/24dBm	-70/-70dBm
		MCS6/6	23/23dBm	-67/-67 dBm
		MCS7/7	23/23dBm	-66/-66dBm
		MCS8/8	22/22dBm	-62/-62dbm
		MCS9/9	22/22dBm	-60/-60dBm

Access Point Deployment

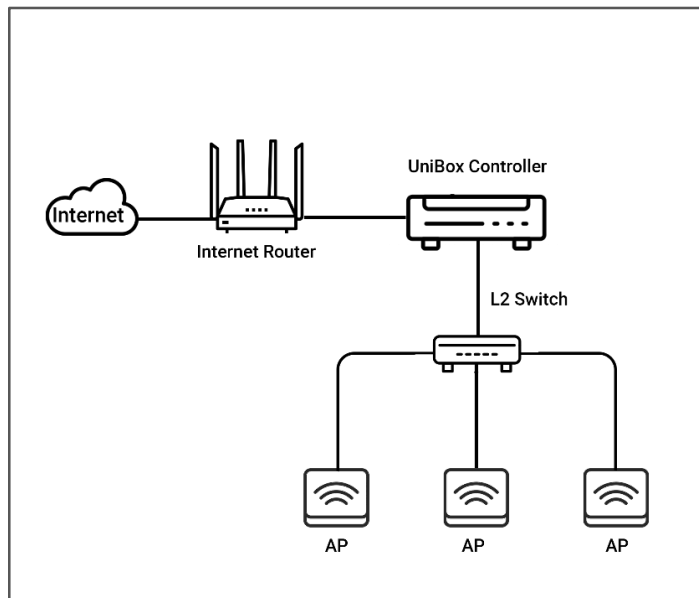


Figure 1. Indio access point with Indio's UniBox on-premise controller. (Enterprise/Venue deployment)

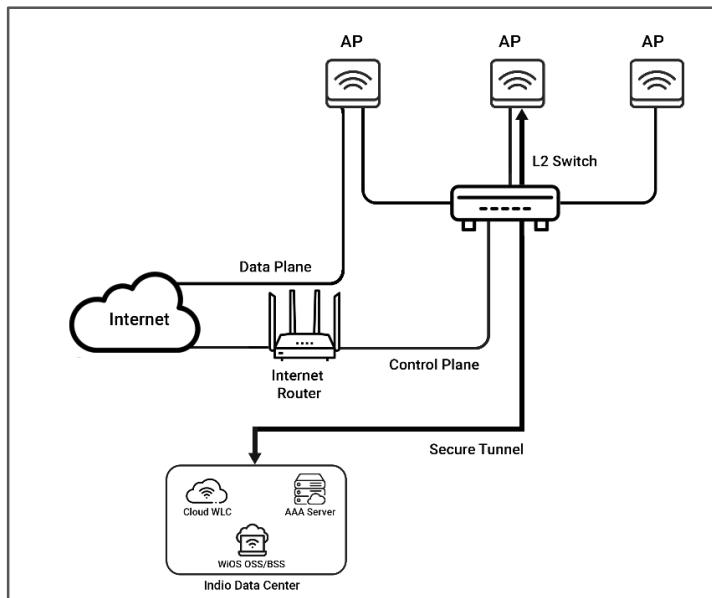


Figure 2. Indio access point with Indio's WiOS cloud controller.


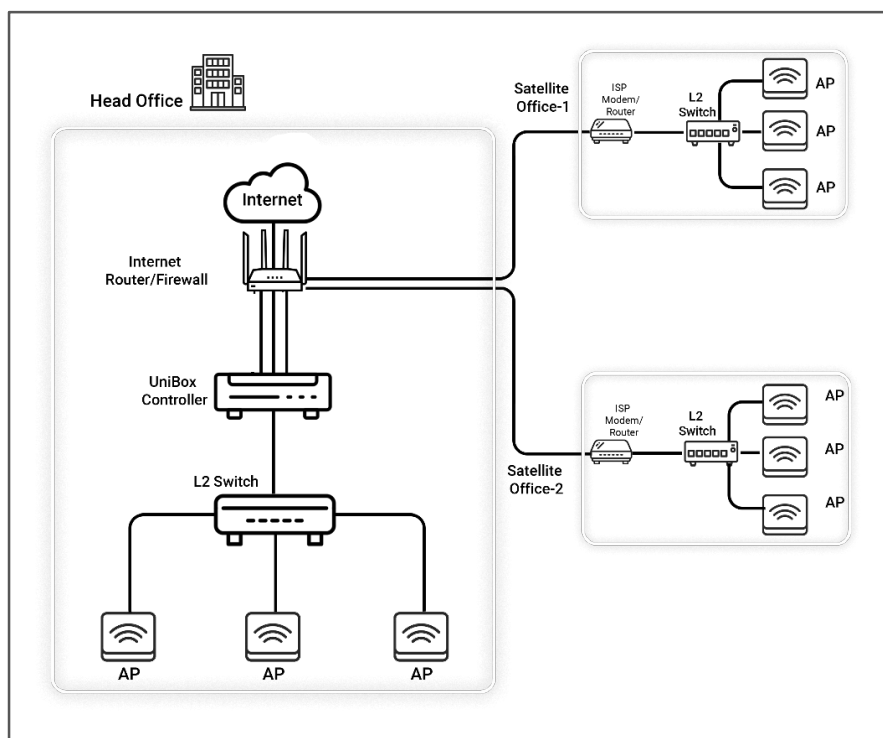


Figure 3. Indio access point with central controller. (Distributed deployment)



UniMax UM-345AX

Dual-band 4x4 MIMO WiFi-6 Access Point

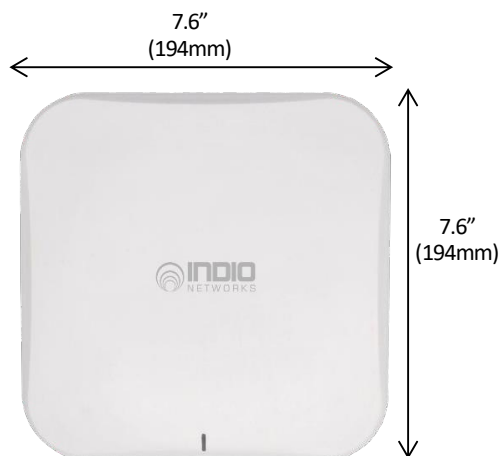

1211g
(2.66lbs)

Wall mounting
keyholes

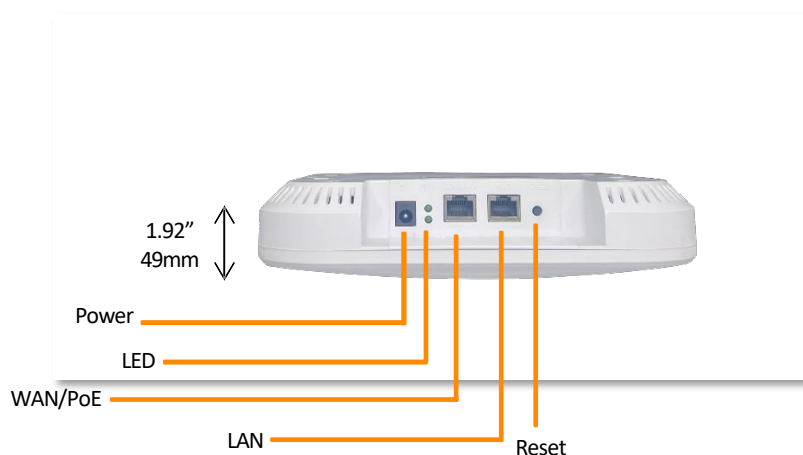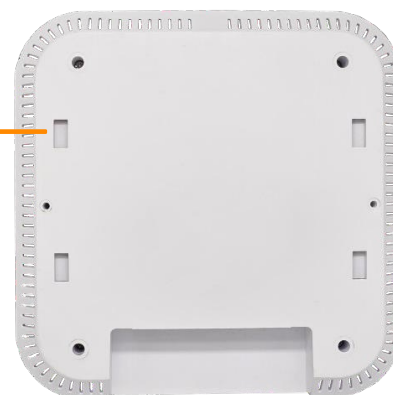

With over two decades of experience, we have worked closely in the wireless space essentially serving over 25+ million users till date. At Indio, we have seen disruptions in the tech sphere and worked alongside them. We solve problems where we see them, we evolve, innovate and adapt. That's why, we constantly craft newer products and solutions to make your life easier. 'Simplifying connectivity' is a principle we hold dear, and we plan on bringing it to everyone, everywhere. With a strong presence in over three important geographies, being Asia, the Middle East and America, we are always available for quick and responsive customer support.

For more information visit- www.indionetworks.com

Indio Networks India, Head
Office
C-410, Teerth Technospace
Baner,
Pune - 411045, India

Africa 5th Floor
Centage Plaza, 14
Allen Ave. Ikeja,

USA 815-A Brazos St,
Suite 326 Austin,
Texas - 78701 U.S.A.



sales@indionetworks.com



91 (20) 6715 7377
+1 888-280-4112



www.indionetworks.com

Copyright © Indio Networks Pvt. Ltd. 2025. (f.k.a. WiFi-Soft Solutions) All rights reserved. DO NOT COPY without prior permission. THIS DOCUMENT IS FOR INFORMATION PURPOSES ONLY, AND DOES NOT CONSTITUTE ANY KIND OF WARRANTIES. All specifications in this document are subject to change without notice.