



Network Access & Bandwidth Controller (NAV-100)

Intelligent hotspot gateway for complete network control.

The NAV-100 is an intelligent hotspot gateway that provides complete control over both wired and wireless networks. It is built on a reliable Linux platform to ensure high performance for medium-sized venues.




Universal Controller

Centrally manage your network with a built-in captive portal engine, bandwidth controller, and policy manager. Capable of handling 100 concurrent user sessions.



Hotspot Billing & Access

Monetize your Wi-Fi with tiered billing plans, vouchers, and credit card integration. Supports Social Media login and Two-Factor (SMS/OTP) authentication.



Compliance & Security

Ensures network safety with MAC blacklisting, user isolation, and URL filtering. Fully compliant with TRAI/DoT regulations with automated web logging.

Gigabit Connectivity

1 Gbps

WAN & LAN Port Speed

Operating Temp

50°C

Max Heat Tolerance

With over years of experience, we have worked closely in the wireless space to solve problems where we see them. We evolve, innovate, and adapt to craft newer products that make your life easier. Simplifying connectivity is a principle we hold, and we plan on bringing it to everyone, everywhere.

Network Access & Bandwidth Controller (NAV-100)



Product Overview

“Simple, Smart Wi-Fi Control.”

The UniBox **NAV-100** is a smart gateway that gives you total control over your wireless network. It enables network administrators to manage both wired and wireless connections from a single, centralized location, ensuring that only authorized users can access the network while tracking activity in real-time.

Who is it for?

The NAV-100 is designed for small venues that need reliable guest Wi-Fi, such as:

- Cafes and Restaurants
- Small Hotels and Inns
- Training Institutes and Small Offices
- Public Wi-Fi Hotspots

Key Capabilities

- **Capacity:** Handles up to 100 users at the same time.
- **Performance:** Built on a stable Linux platform for reliable speed and uptime.
- **Cloud Ready:** Works seamlessly with the WiOS Cloud manager, allowing you to control remote NAV-100 units from anywhere.

Key Features

Centralized Network Control

- **Unified Management:** Manage wired and wireless networks from a single interface with Multi-WAN support.
- **Routing Capabilities:** Includes static/dynamic routing, port forwarding, and load balancing for optimized traffic flow.

Intelligent Bandwidth Management

- **Traffic Shaping:** Enforce strict upload/download speed limits and time/data quotas per user.
- **Fair Usage:** Dynamic bandwidth allocation ensures stable connectivity for up to 100 concurrent users.

Guest Access & Monetization

- **Captive Portals:** Create custom login pages with voucher, credit card, and Social Media login options.
- **Billing Integration:** Seamlessly integrates with Hotel PMS and payment gateways for automated revenue generation.

Advanced Security

- **Access Control:** Features MAC blacklisting, user isolation, and Two-Factor (SMS/OTP) authentication.
- **Content Filtering:** Blocks malicious websites with group-based URL filtering to ensure a safe browsing environment.


Compliance & Reporting

- **Regulatory Compliance:** Automated web logging and archiving ensure full TRAI/DoT compliance.
- **Detailed Analytics:** Generate real-time reports on user activity, revenue, and network health, sent automatically via email.

A compact, all-in-one hotspot gateway designed for cafes, small hotels, and offices. The NAV-100 combines enterprise-grade security, robust billing engines, and cloud-ready management on a reliable Linux platform to handle medium-sized networks effortlessly.

Technical Specification

Feature	Description
Interfaces	1 x WAN Port (RJ-45) - 10/100/1000 base T/Tx 1 x LAN Port (RJ-45) - 10/100/1000 base T/Tx 1 x Service Port (RJ-45) 2 x USB Ports
Networking	Static & Dynamic routing DNS & DHCP server support Layer 2 isolation and SNMP v2c support NTP (Time Protocol) support
Power	Input: 12VDC, 2A Consumption: 5W Heat Dissipation: 300 BTU
Physical	Dimensions: 176 x 174 x 30 mm (6.92" x 6.85" x 1.18") Weight: 500g (1.1 lbs) Form Factor: Standalone box
Environment	Operating Temp: 5°C to 50°C Humidity: 8% - 90% (Non-condensing) Design: Fanless (Quiet operation)
Compliance	CE Emission, FCC Class A, ROHS

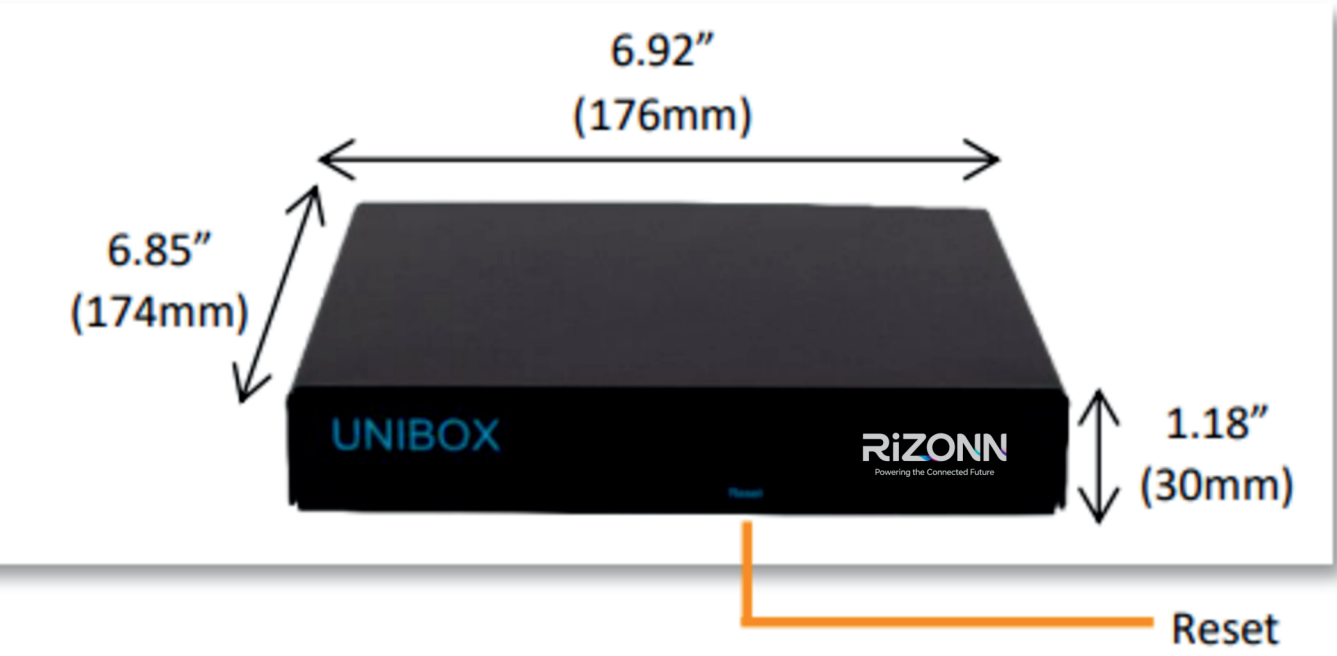

Captive Portal

