

High Performance, Access Point (NAV-219-VA)



WiFi 6 In-Wall Access Point

Experience the next generation of wireless connectivity. The NAV-219-VA delivers optimal link speeds and enterprise-grade security in a sleek, in-wall design tailored for modern spaces.




High-Speed WiFi 6

Supports a total link speed of 1800Mbps, offering 600Mbps on 2.4GHz and 1200Mbps on 5GHz for superior performance.



Smart MU-MIMO Tech

Advanced 2x2 MU-MIMO ensures efficient data transmission, handling multiple devices simultaneously without lag.

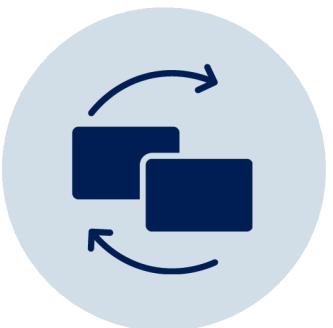

Plug & Play Setup

Fully self-configurable. Once connected, it downloads configurations from the cloud or controller, operational in minutes.

Combined Speed

1800Mbps

High-Performance WiFi 6

Client Capacity

120+

Concurrent Devices

Designed for high-density environments like campuses and venues, the NAV-219-VA supports Wave 2.0 and Seamless Roaming. It features Gigabit WAN & LAN ports and versatile management options including Cloud, Controller, or Stand-alone modes to suit any network requirement.

High Performance, Access Point (NAV-219-VA)



Product Overview

The **NAV-219-VA** is a high-performance wireless access point designed to be mounted directly into the wall. It uses the latest WiFi 6 (802.11ax) technology to provide fast and reliable internet.

This device delivers a combined speed of 1800Mbps (600Mbps on the 2.4GHz band and 1200Mbps on the 5GHz band). It features Gigabit Ethernet ports for fast wired connections and supports advanced technologies like MU-MIMO to handle multiple devices at once efficiently.

It is ideal for high-density environments such as universities, concert venues, and gyms. The sleek, pure white design blends easily into corners and indoor settings.

Key Points

- 802.11ax, Wave 2, 100+ users.
- Advanced WiFi Features, e.g., 2x2 MIMO.
- 1024QAM, long OFDM, DL/UL MIMO.
- Pure white, sleek, corner blended for the best aesthetic in indoor environments.
- Designed for in-wall mounting.
- Managed by cloud, controller appliance, or stand-alone mode.
- PoE (802.3af) powered.

Key Features

Optimized WiFi 6 Performance

- Offers a total link speed of 1800Mbps (600Mbps on 2.4GHz & 1200Mbps on 5GHz).
- Employs 2x2 MU-MIMO technology for lag-free performance with multiple devices.
- Incorporates 1024-QAM and OFDMA modulation for enhanced data stability and efficiency.

Discreet In-Wall Design

- Sleek, pure white design fits well in corners and indoor spaces.
- Standard wall-mount installation suits hotels, campuses, and offices.
- Compact size (87mm x 87mm) ensures an unobtrusive presence in any room.

Enterprise-Grade Security

- Supports WPA/WPA2 encryption, VLAN isolation, and MAC filtering for robust data protection.
- Features secure guest access with captive portals, SMS login, and voucher systems.
- Includes built-in Firewall and DoS Protection to prevent unauthorized network attacks.


Flexible Connectivity

- Offers Gigabit WAN & LAN ports for fast wired connections.
- Supports 802.3af/at PoE for data and power over one cable.
- Includes 1 WAN and 4 LAN ports for connecting wired devices like IP phones or laptops.

Easy Management

- Plug-and-play deployment with self-configuration via Cloud or On-premise Controllers.
- Built-in troubleshooting tools including Ping, Traceroute, and Speed-test.
- Supports remote monitoring protocols like SNMP and Syslog for real-time network status updates.

The NAV-219-VA is a high-performance IEEE 802.11ax access point designed for high-density environments. With Wave 2.0 technology, OFDMA, and seamless roaming, it ensures stable, high-speed coverage for over 100 concurrent users.

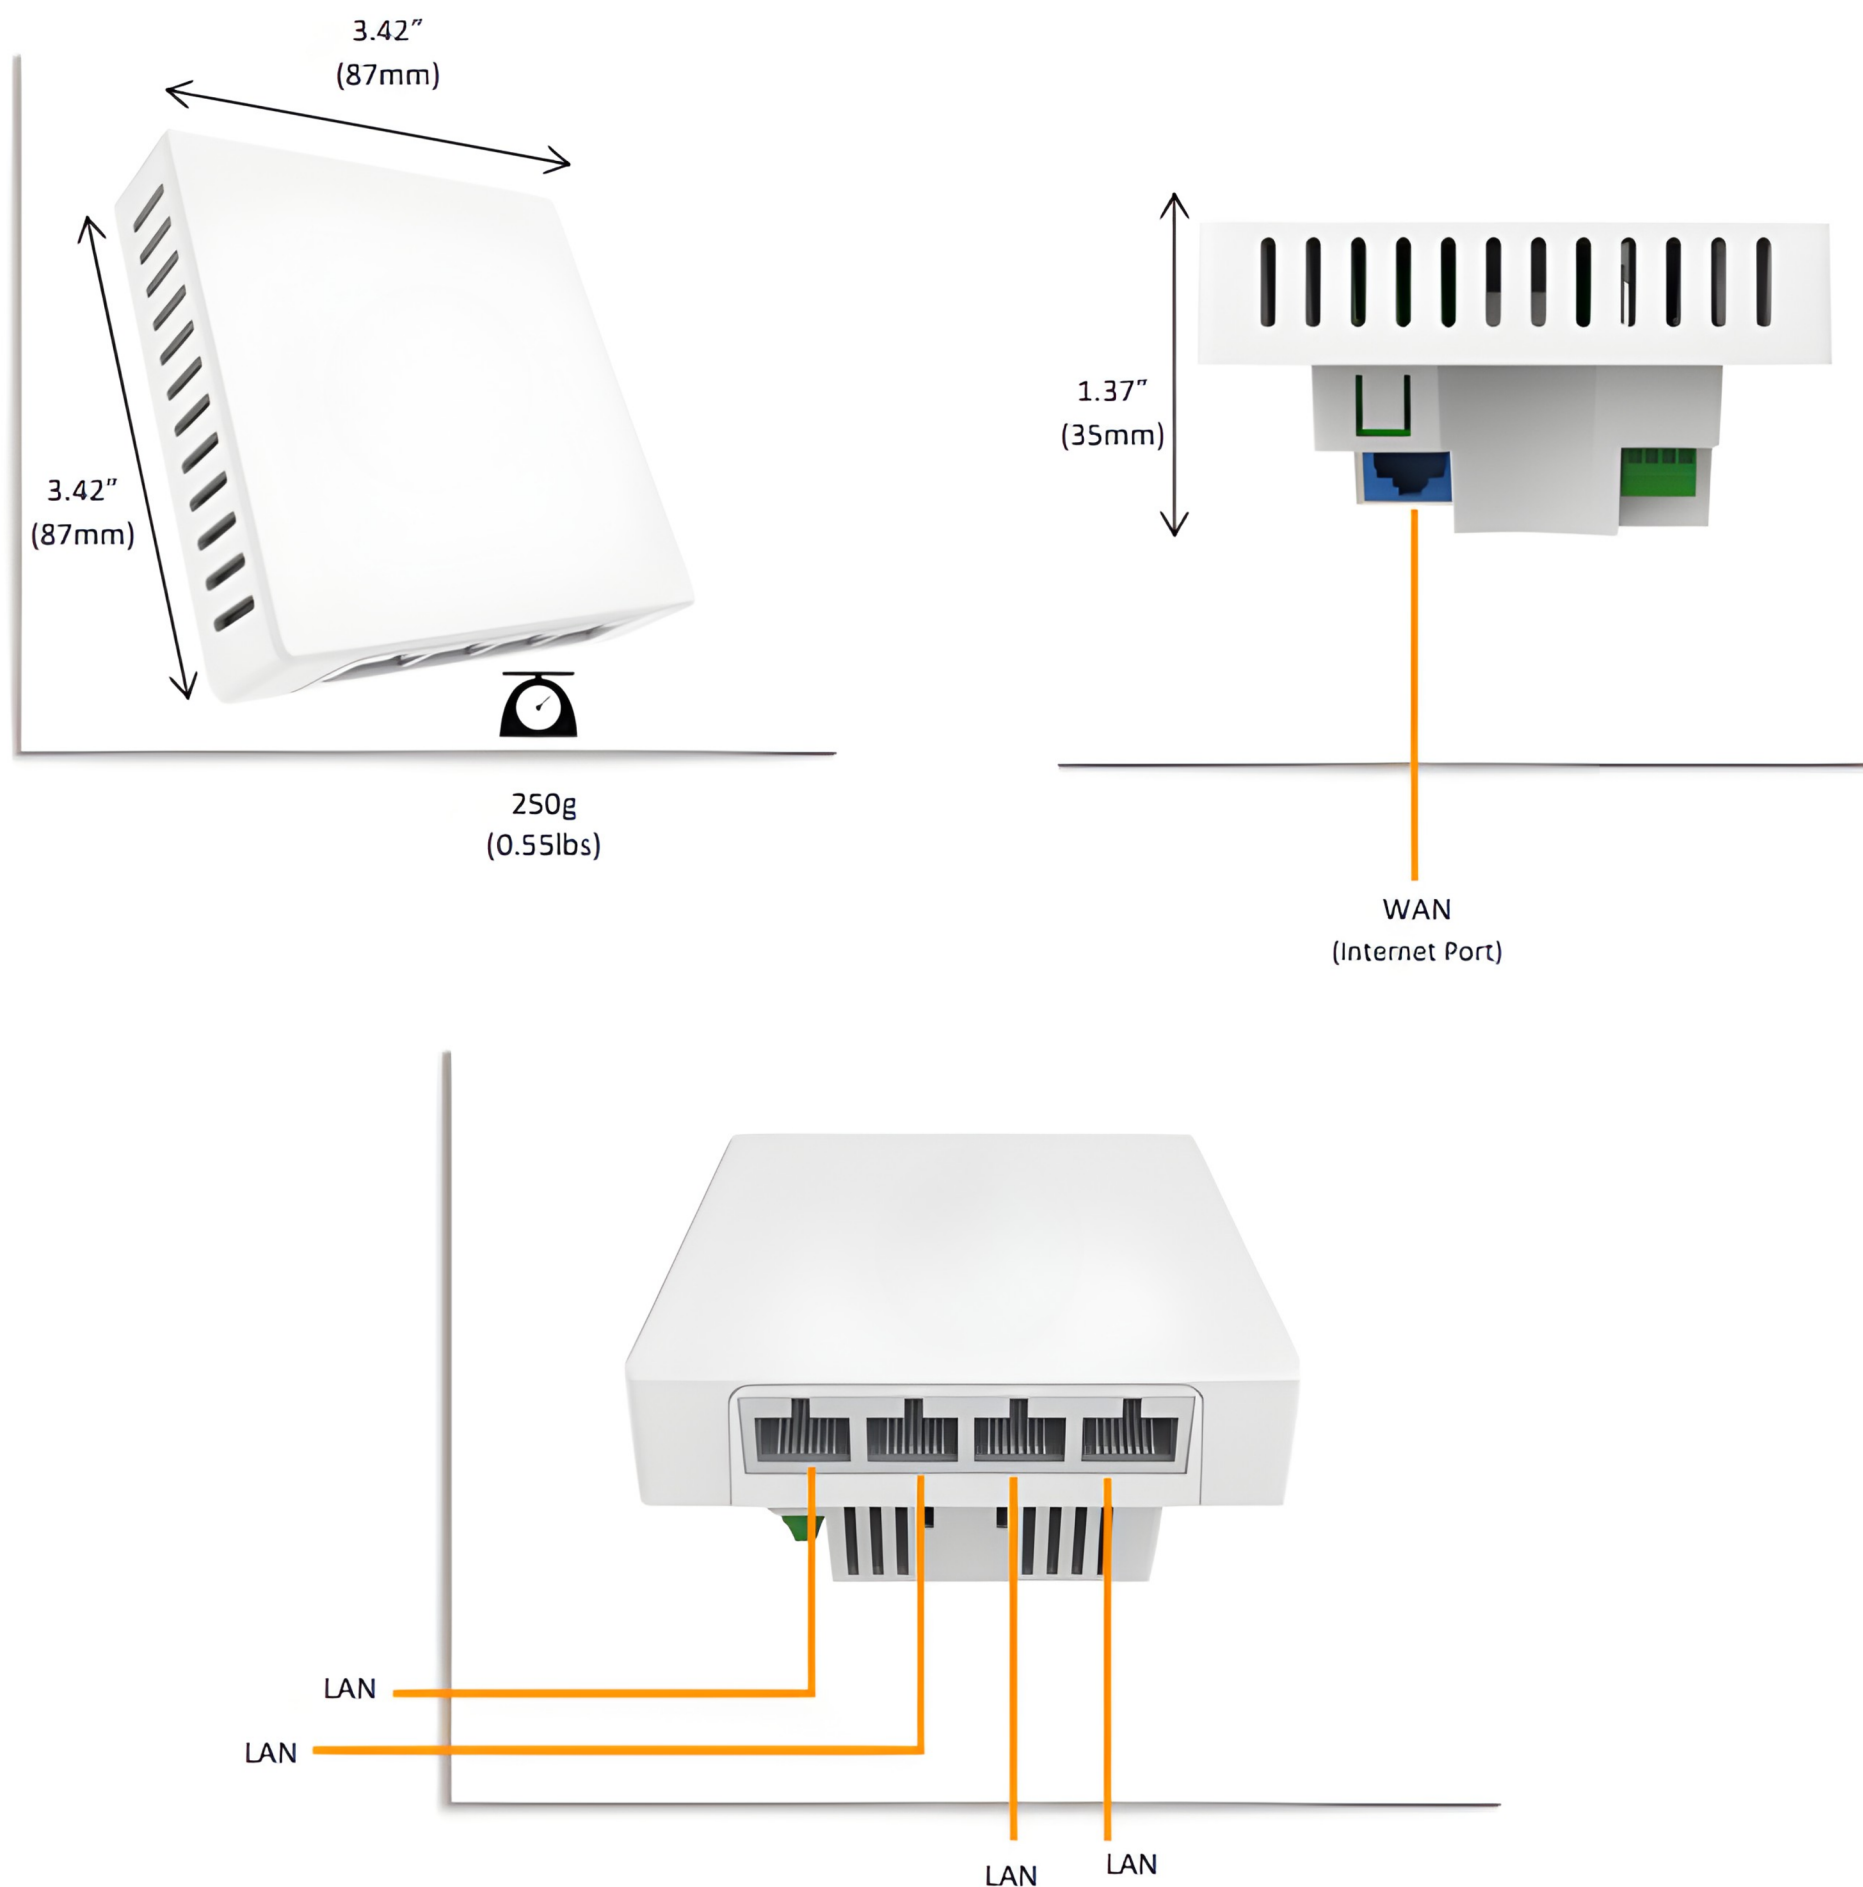

Access Point Deployment

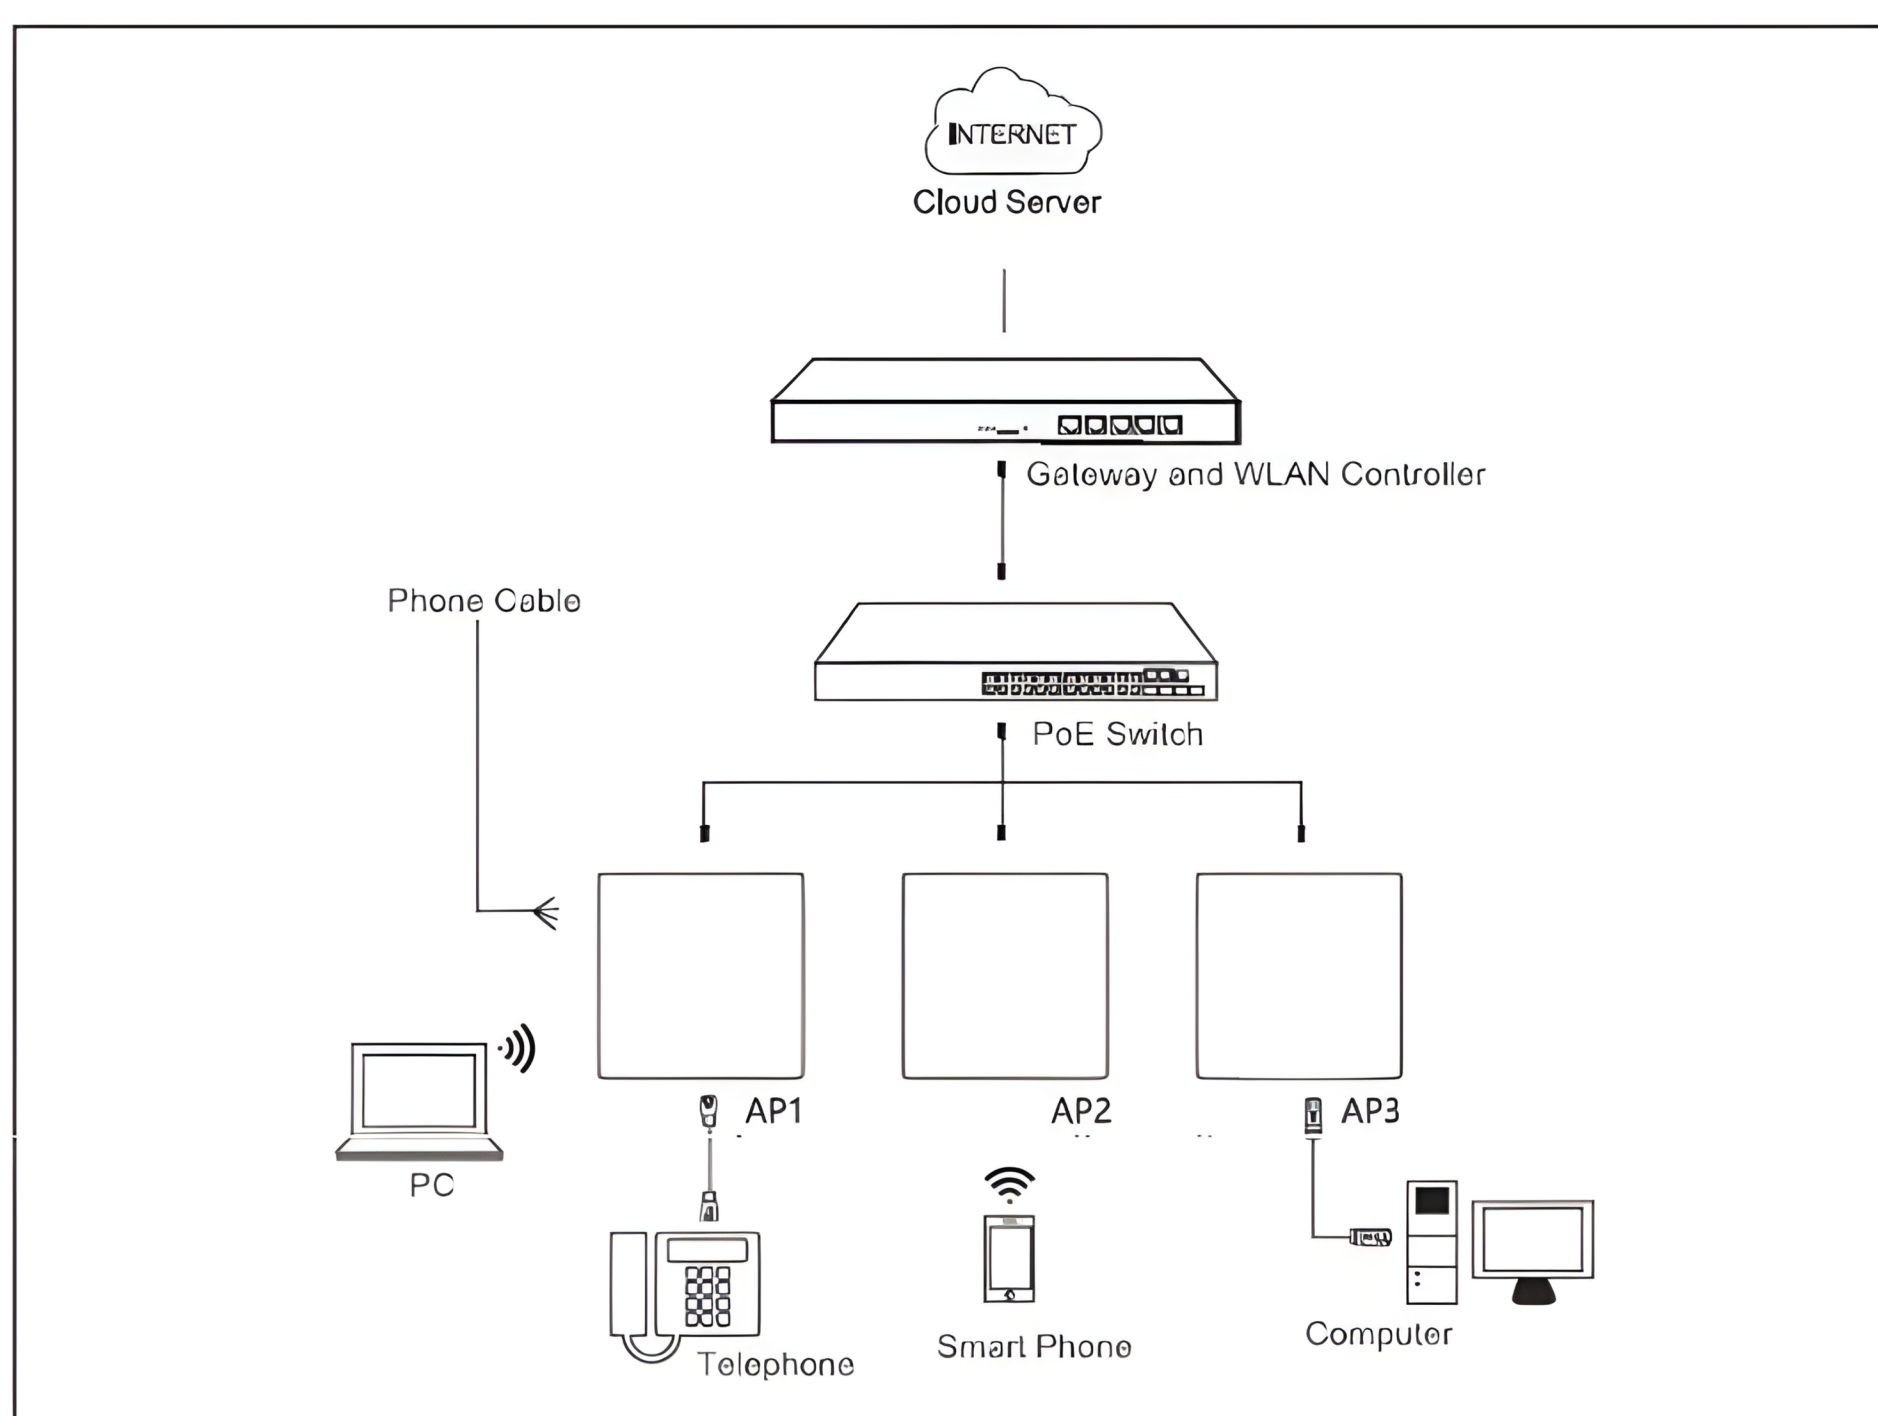


Figure 1. Rizonn access points with on-premise controller.

Technical Specifications

Category	Feature	Specification / Description
Product Information	Model Name	NAV-219-VA
	Product Type	WiFi 6 In-Wall Access Point
Hardware	Chipset	MT7621DAT + MT7905DN + MT7975DN
	Memory	128MB
	Flash	SPI NOR 16MB
	Interfaces (Ports)	1x 10/100/1000 RJ45 WAN Port 4x 10/100/1000 RJ45 LAN Ports (Optional: 3x LAN + 1x RJ11)
	Power Method	PoE (IEEE 802.3af/at) 48V
	Power Consumption	14W
	Reset Button	1 Reset button (press 10 seconds to revert to default)
Wireless & RF	WiFi Standards	2.4GHz: 802.11b/g/n/ac/ax 5GHz: 802.11a/n/ac/ax
	Link Speed (Aggregate)	1800Mbps Total (600Mbps @ 2.4GHz + 1200Mbps @ 5GHz)
	MIMO / Spatial Streams	2x2:2 for 2.4GHz 2x2:2 for 5GHz
	Modulation	1024-QAM, MU-MIMO, DL/UL-OFDMA
	Frequency Bands	2.4GHz: 2.4GHz - 2.484GHz 5GHz: 5.15GHz - 5.85GHz
	Supported Channels	Americas: 2.4G (1-11), 5G (36-64, 100-144, 149-165) EU: 2.4G (1-13), 5G (36-64, 100-144) Japan: 2.4G (1-14), 5G (36-64, 100-144) Others: See regional domains
	Antenna Type	Internal Antennas
	Antenna Gain	2.4GHz: 2dBi 5GHz: 4dBi
	Max Transmit Power	20dBm (100mW)
	Receiver Sensitivity	-94dBm (2.4GHz) -90dBm (5GHz)
	Wireless Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK encryption
Software & Network	Management Modes	Cloud, Controller Appliance, Stand-alone mode
	Operation Modes	Wireless AP, Gateway, Router, Meshing
	SSID Capacity	8 Total (4 per radio: 2.4GHz & 5GHz)
	Client Capacity	120 Concurrent devices (100+ users)
	VLAN Support	802.1q (Static, Dynamic via Radius, Port-based)
	Authentication	802.1x, RADIUS (Auth, Accounting, Load balancing), MAC Auth
	Guest Access	Captive Portal, SMS/OTP, Voucher, Social Media Login, Payment Gateway

	Security Features	DoS Protection, Firewall, IP/MAC/Domain Filter, IP-MAC Binding
	Networking Features	IPv4, NTP (Time Sync), GRE/L2TP Tunnels, ACL, QoS (Per SSID/Device), Band Steering, Airtime Fairness
	Troubleshooting	Syslog, Ping, Traceroute, Speed-test
Environmental	Operating Temperature	-20°C ~ 55°C
	Storage Temperature	-40°C ~ 70°C (-40°F ~ 158°F)
	Operating Humidity	10% ~ 90% non-condensing
	Storage Humidity	5% ~ 90% non-condensing
Physical	Mounting	Wall Mount
	Dimensions	87mm x 87mm x 35mm (3.42" x 3.42" x 1.37")
	Weight	250g (0.55 lbs)
Certifications	Compliance	CE, FCC, WPC, RoHS (implied via compliant text)
	Safety Standard	EN 60950-1

