



Network Access & Bandwidth Controller (NAV-50)

Intelligent hotspot gateway for complete network control.

The **NAV-50** is an intelligent access controller designed to provide complete control over your wireless network. It allows administrators to centrally manage wired and wireless networks, prevent unauthorized access, and track real-time activity, making it ideal for small venues like cafes, hotels, and offices.




Centralized Management

Manage remote units and track users centrally. Built on a reliable Linux platform, it handles up to 50 concurrent user sessions with high availability.



Bandwidth Control

Complete bandwidth management with rate limiting, dynamic allocation, and group-based policies to ensure fair usage across the network.



Monetization & Billing

Integrated hotspot billing, voucher management, and Payment Gateway support. Seamlessly integrates with multiple PMS vendors for hospitality.

Connectivity

3x

Gigabit LAN/WAN Ports

Eco-Friendly

5W

Low Power Consumption

With over years of experience, we have worked closely in the wireless space to solve problems where we see them. We evolve, innovate, and adapt to craft newer products that make your life easier. Simplifying connectivity is a principle we hold, and we plan on bringing it to everyone, everywhere.

Network Access & Bandwidth Controller (NAV-50)



Product Overview

The **UniBox NAV-50** is an intelligent access controller and hotspot gateway designed to provide comprehensive control over your wireless network. It empowers network administrators to centrally manage both wired and wireless networks, preventing unauthorized access while tracking real-time network activity.

Engineered for seamless integration, the NAV-50 features a built-in captive portal engine, bandwidth controller, policy manager, URL tracker, and reporting system. It is fully compatible with the WiOS Cloud Hotspot Manager, allowing administrators to centrally control and monitor remote NAV-50 units for complete network oversight.

Ideal Applications

The **UniBox NAV-50** belongs to a family of controllers specifically optimized for managing network access in small to mid-sized venues. It is the ideal solution for:

- **Hospitality:** Small Hotels, Resorts, Inns, Restaurants, and Cafes
- **Education & Corporate:** Universities, Training Institutes, and Small Offices
- **Public Sectors:** Healthcare facilities, Airports, Transport hubs, and Public Wi-Fi Hotspots

Key Features

Networking & Connectivity

- Universal Controller with Gigabit LAN & WAN Ports
- Multi-WAN support with Load Balancing
- Group-based Routing and Port Forwarding
- Comprehensive Network Monitoring

Bandwidth & Policy Management

- Rate limiting and dynamic bandwidth allocation.
- Enforce Fair Usage Policies, Date/Time policies, and Group-based policies.
- Set limits based on time and data usage.

Captive Portal & User Access

- **Customization:** Template-based captive portals with on-board server support.
- **Login Methods:** Multiple authentication options, including Social Media login, Two-Factor (SMS/OTP) authentication, and Access Codes/Vouchers.
- **Security:** User isolation, MAC Blacklisting, and TRAI/DOT Compliance.

Reporting & Administration

- **Analytics:** Detailed reports on online users, usage, revenue, social media profiling, and PMS/Voucher activity.
- **Compliance:** Web logging, archiving, and group-based URL filtering.
- **Maintenance:** Automatic updates, remote syslogs, role-based administration, and diagnostic tools.


Billing & Monetization

- **Hotspot Billing:** Configurable billing plans and tiered billing options.
- **Payments:** Integrated payment gateway support.
- **PMS Integration:** Compatible with multiple Property Management Systems (PMS) vendors for hospitality integration.
- **Advertising:** Ad integration support for revenue generation.

This intelligent access controller and hotspot gateway is designed for small venues, supporting 50 concurrent users. Built on a reliable Linux platform with Gigabit connectivity, it offers enterprise-grade bandwidth management, captive portals, and robust security for full control of your wireless network.

Technical Specification

Feature	Specification
Interface	1 x LAN Port (RJ-45): 10/100/1000 base T/Tx 1 x WAN Port (RJ-45): 10/100/1000 base T/Tx 1 x Service Port (RJ-45): 10/100/1000 base T/Tx 2 x USB Ports
Networking	Static & Dynamic routing DNS & DHCP server Layer 2 isolation SNMP v2c support NTP (RFC 1305) support
Power Rating	Input Voltage: 12VDC, 2A Power Consumption: 5W Heat Dissipation: 300 BTU
Physical Dimensions	Form Factor: Standalone Dimensions: 176x174x30 mm (6.92"x6.85"x1.18") Net Weight: 500gms (1.1 lbs)
Environmental	Operating Temperature: 5°C to 50°C Non-condensing Humidity: 8% - 90% Cooling: Fanless Design
Compliance	CE Emission, FCC Class A, RoHS

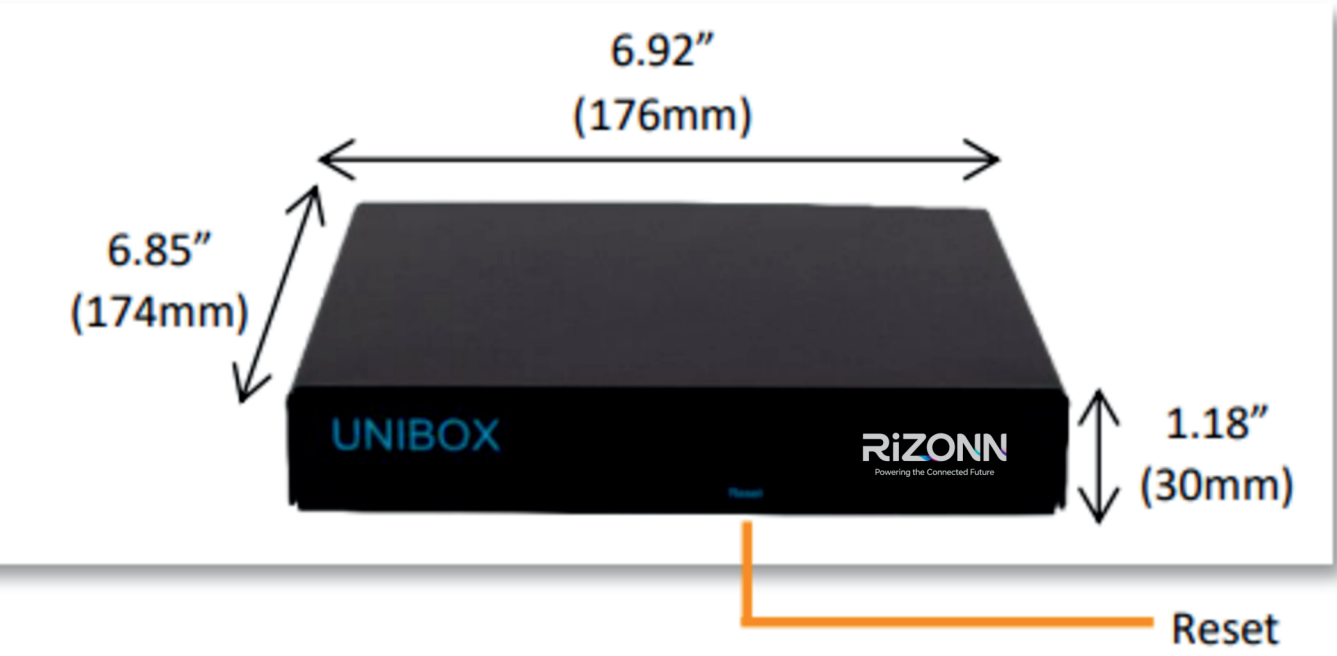

Captive Portal

