

Outdoor Wi-Fi 6 Cloud Managed Access Point (NAV-519-VA)



Dual-band Wi-Fi 6 Cloud Managed Outdoor Access Point

It is a high-performance outdoor access point designed for harsh environments. It uses the latest Wi-Fi 6 technology to provide fast and reliable internet coverage. Managed entirely through the cloud, it is easy to set up and perfect for demanding business applications like video streaming and voice calls.




Super Fast Speeds

Delivers a combined speed of up to 3000Mbps. It provides 600Mbps on the 2.4GHz band and 2400Mbps on the 5GHz band, ensuring a great browsing experience.



Connect More Devices

Uses MU-MIMO technology to communicate with multiple devices at the same time. This keeps the connection fast and stable, even when many users are online.



Built for Outdoors

Housed in a rugged, IP-67 rated metal case that protects against dust, rain, and extreme weather (-20°C to 60°C). It includes external antennas for better range.

Max Throughput

3000Mbps

Aggregate Link Speed

Client Capacity

150+

Concurrent Users Supported

The NAV-519-VA is designed for simplicity and performance. It is fully cloud-managed, allowing for remote monitoring and control from anywhere. With its "Zero Touch" Plug-n-Play technology, the device automatically configures itself in minutes, eliminating complex manual setups. Combined with enterprise-grade security and robust outdoor protection, it ensures a safe and seamless internet experience for all users.

Outdoor Access Point (NAV-519-VA)



Product Overview

The **NAV-519-VA** is a robust, dual-band Wi-Fi 6 outdoor access point that is managed entirely from the Cloud and built using OpenWiFi Technology. Designed specifically for general-purpose deployments in harsh outdoor locations, this access point offers superior performance and enterprise-grade security. It supports a maximum combined data speed of 3000Mbps (3 Gbps) by using concurrent 2.4GHz and 5GHz radios, ensuring fast and reliable connectivity.

This device is engineered to handle the most demanding business applications, such as clear voice calls and high-definition video streaming, even in difficult outdoor environments. To ensure durability, the NAV-519-VA comes in a rugged, IP-67-rated metal case that can withstand extreme weather conditions. It also features external Omnidirectional antennas to provide better signal range and wider coverage. Furthermore, the NAV-519-VA is a self-configurable, plug-and-play device; once powered on and connected to the network, it automatically downloads its configuration from the cloud and becomes operational within minutes.

Key Features

Super-Fast Wi-Fi 6 Performance

- Delivers a massive 3000Mbps total link speed (600Mbps on 2.4GHz + 2400Mbps on 5GHz).
- Ensures high throughput for bandwidth-hungry apps like HD video streaming and voice calls.

High Capacity & Efficiency

- Features MU-MIMO technology to communicate with multiple devices simultaneously.
- Supports 150+ concurrent users, maximizing efficient use of the RF spectrum for smoother downloads.

Rugged Outdoor Design

- Encased in an IP-67 rated metal housing to withstand dust, rain, and extreme temperatures (-20°C~60°C).
- Equipped with external Omnidirectional antennas to significantly boost range and coverage.


Smart Cloud Management

- **Zero Touch Plug-n-Play:** Automatically downloads configuration from the cloud for setup in minutes.
- Includes Enterprise-grade security (WPA/WPA2) and dedicated Guest/Hotspot modes for safe access.

Enterprise-Grade Security

- Supports WPA/WPA2 encryption and VLAN isolation to keep business traffic secure.
- Features built-in Firewall, MAC filtering, and RADIUS authentication to prevent unauthorized entry.
- Offers dedicated Hotspot modes to isolate visitors from the main corporate network.

A dual-band, IP-67 weather-proof Access Point delivering 3 Gbps speeds. Built with OpenWiFi technology, it features self-healing mesh, cloud management, and external antennas to provide reliable, wide-area connectivity in the harshest environments.

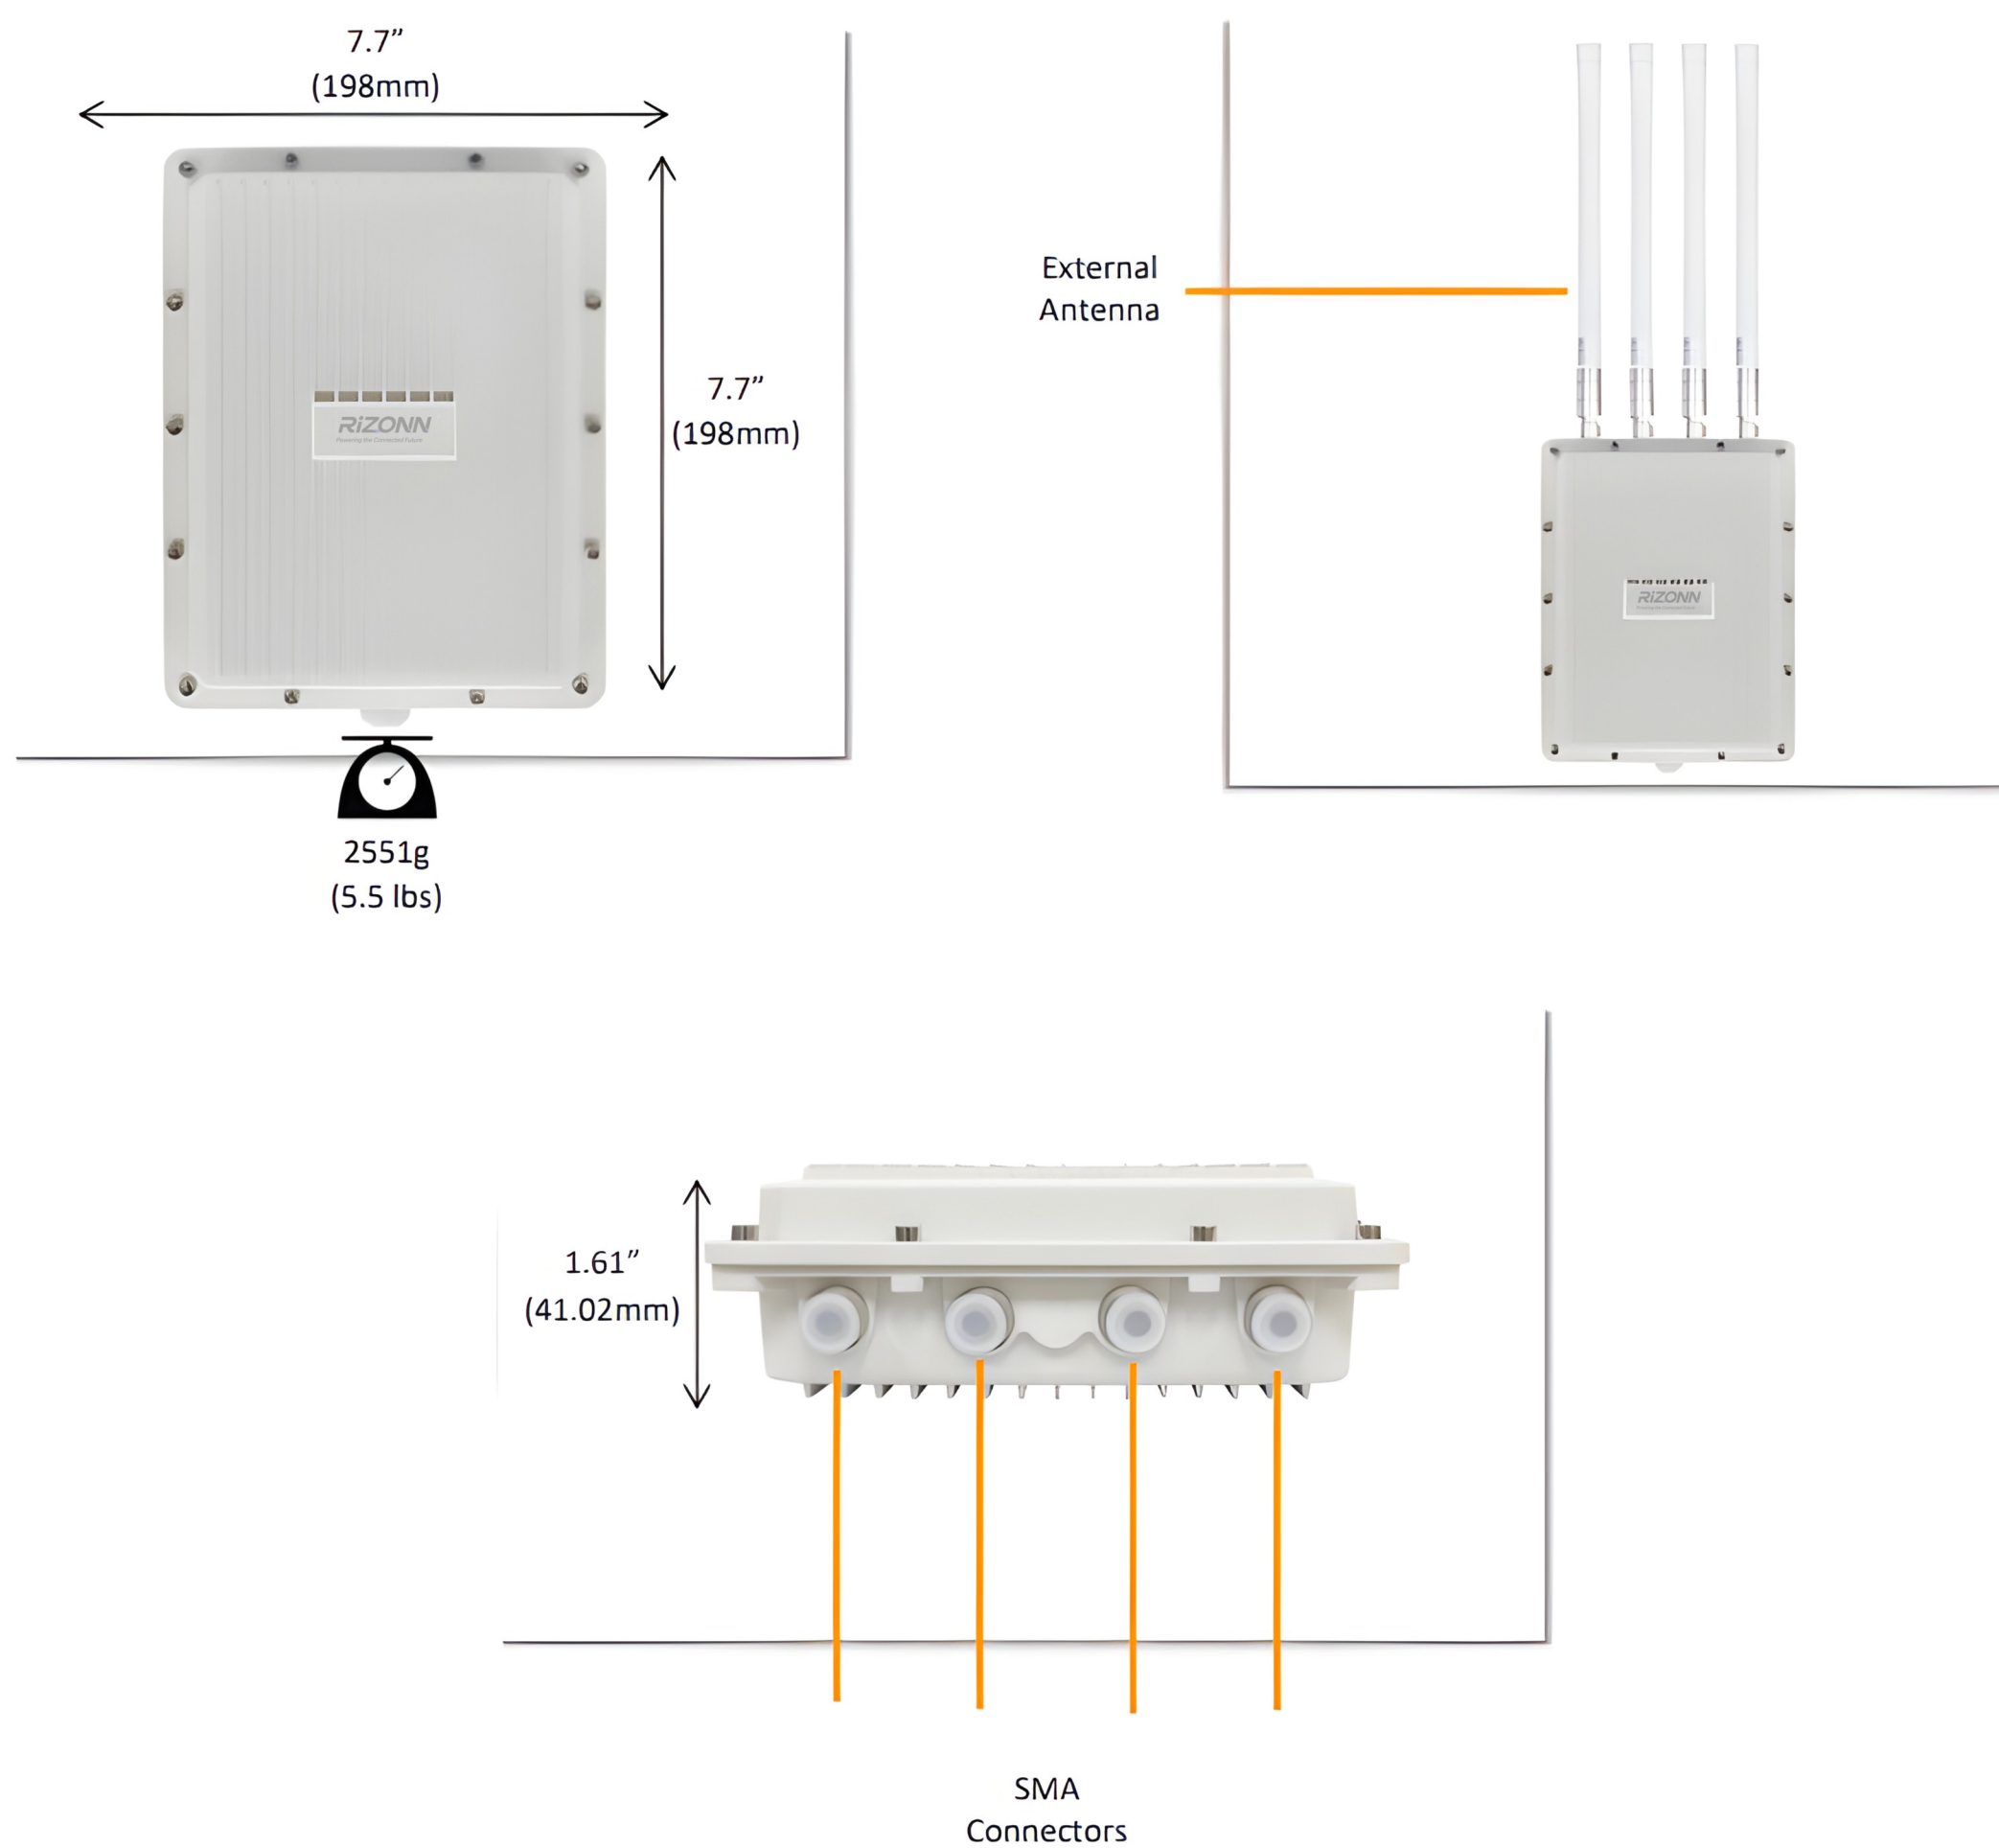

Access Point Deployment

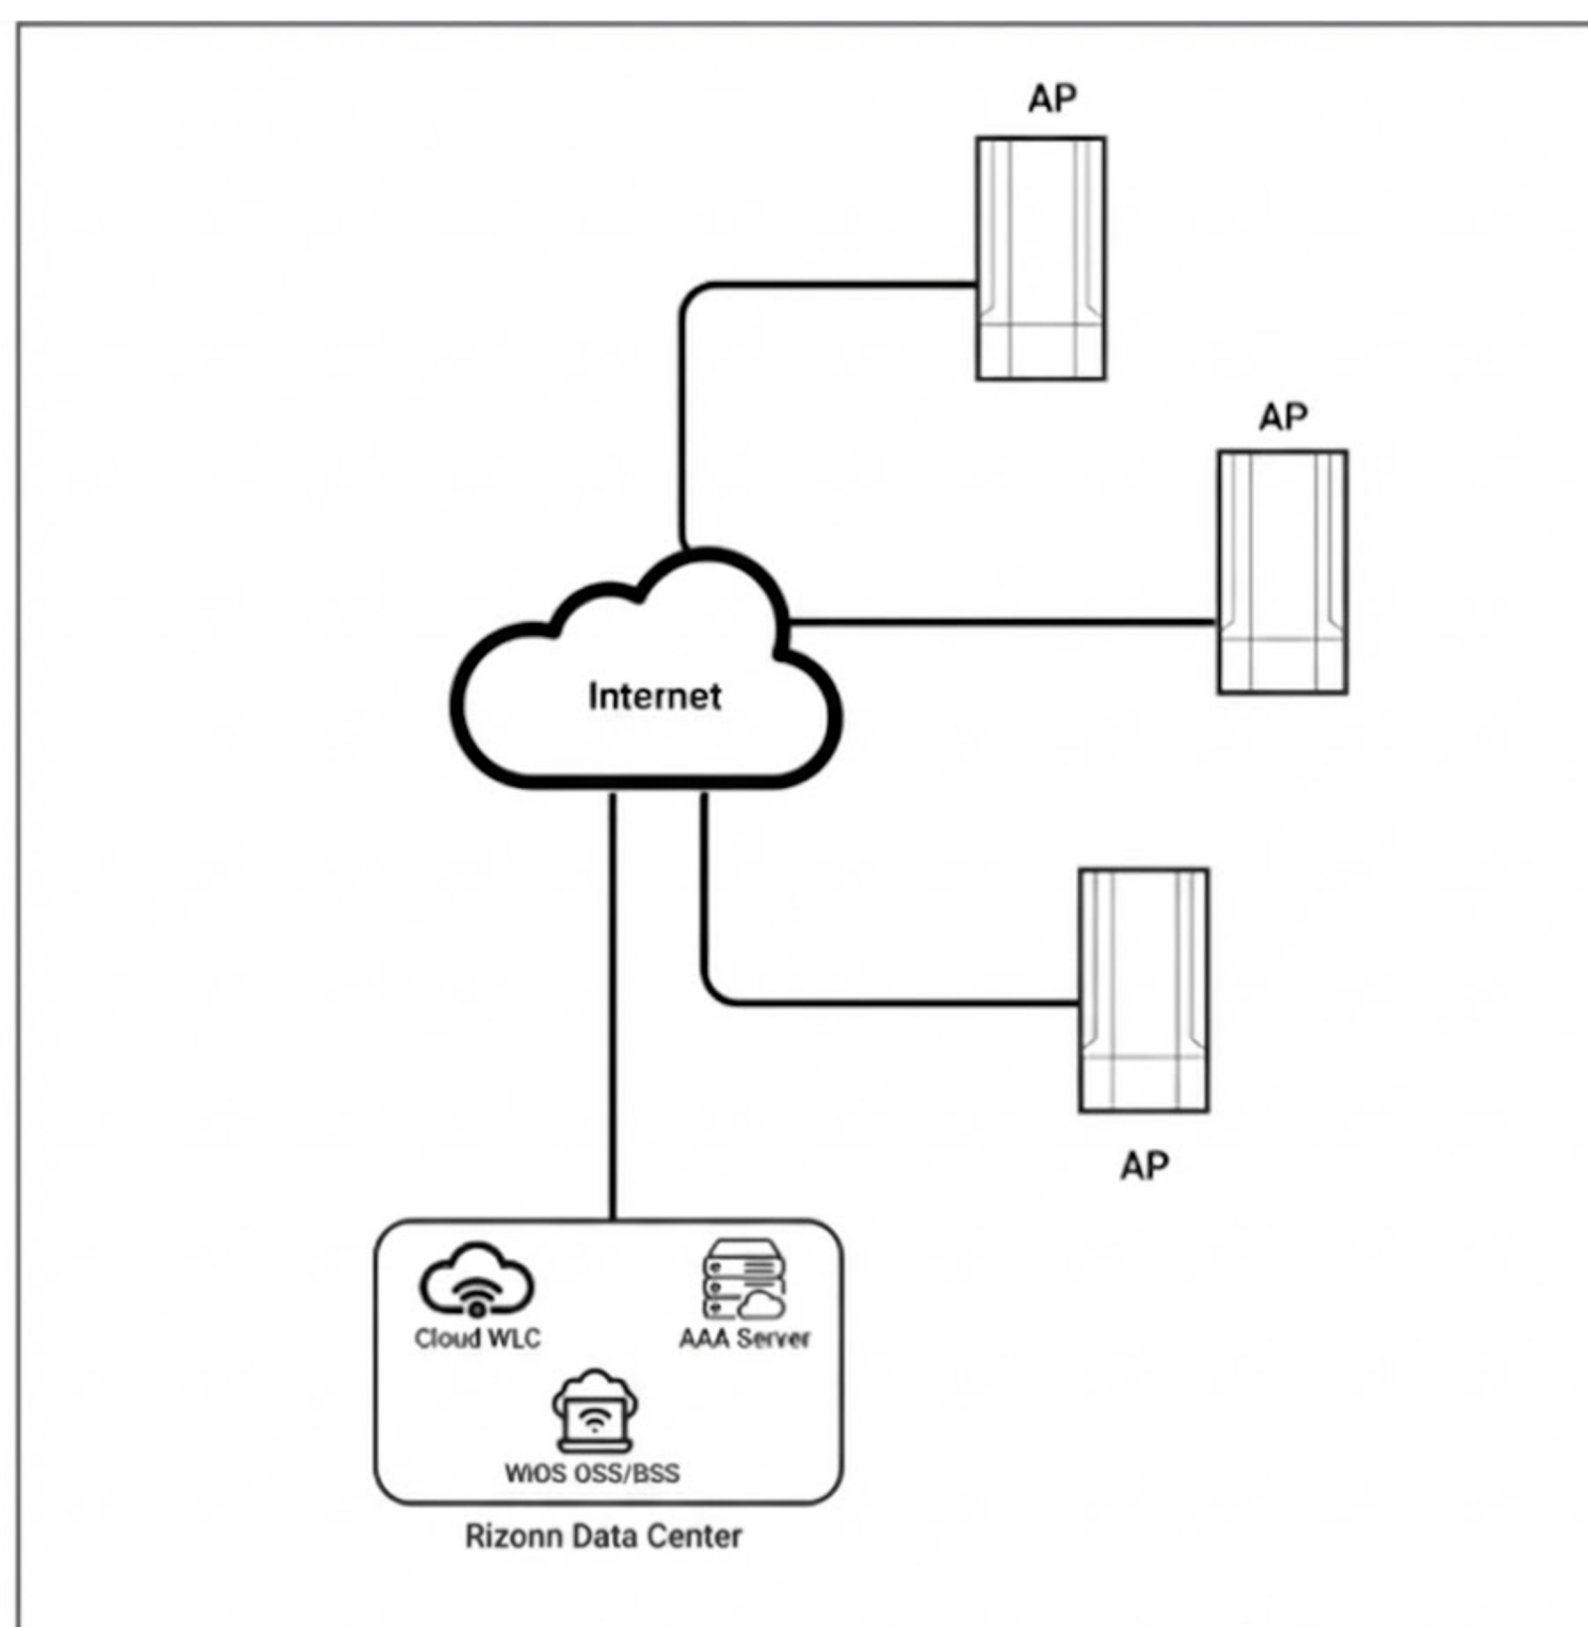


Figure 1. UniMax Access Point with Rizonn Cloud manager

Technical Specifications

Category	Feature	Details
Hardware System	Processor (Chipset)	Qualcomm 1Ghz Quad-Core CPU with dedicated NSS
	Memory	512MB RAM
	Flash Storage	32MB
	Ethernet Ports	1x 10/100/1000 BASE-T, RJ-45 Ethernet Port
	Interface	1x WAN
	Antennas	External 6dBi omnidirectional antennas
Power	Power Source	Power-over-Ethernet (PoE+): 802.3af/at or Proprietary 48V
	Power Consumption	25W maximum
	Output Power	2.4GHz: 26 dBm; 5.8GHz: 26 dBm
Wireless Specs	Wi-Fi Standards	IEEE 802.11 a/b/g/n/ac/ax
	Radios	Concurrent Dual-Band: 2.4GHz (802.11b/g/n/ax) & 5GHz (802.11a/n/ac/ax)
	MIMO / Streams	2x2 MIMO; 2 Spatial Streams
	Data Rates	2.4GHz: Max 600Mbps 5GHz: Max 2400Mbps
	Frequency Bands	2.4GHz: 2400–2482 MHz 5GHz: 5150–5250 MHz, 5250–5350 MHz, 5470–5725 MHz, 5725–5850 MHz
	Advanced Features	WMM, Power Save, 802.11r/k/v (Fast Roaming), Hotspot Service, Captive Portal, WISPr
Performance	Total Throughput	3000Mbps (Aggregate Link Speed)
	User Capacity	150+ Concurrent devices
	SSID Capacity	8 SSIDs per Radio
Software & Management	Management Mode	Cloud Controller Managed
	Installation	Plug-n-Play (Zero Touch)
	Authentication	RADIUS authentication, 802.1x, PSK, SAE
	Guest Portals	Click-through, Data Capture, SMS/OTP, Payment Gateway, Social Media, Voucher
	Traffic Management	Rate Limiting (Per Client/SSID), Dynamic Rate Limiting, MAC Authentication/Filtering, Firewall
	Troubleshooting	Syslog, ping, traceroute, speed-test
	Time & Data	NTP Time Sync; Data Offload supported
Networking	Protocols	IPv4/IPv6 Dual Stack
	VLAN	802.1Q (static and dynamic via RADIUS), Port-based
	Tunneling	GRE, VPN
	Security Policies	ACL (Access Control Lists), Device Fingerprinting
Regulatory & Certifications	Certifications	EN 60950-1 (Safety), WPC, OpenWiFi Compliant
	Supported Regions	Americas (US), European Union, Taiwan, Japan, Israel, Rest of World

Physical & Environmental	Operating Temperature	-20°C~60°C
	Operating Humidity	5% ~ 95%
	Mounting	Outdoor Pole or Wall mount
	Dimensions	198mm x 198mm x 41mm (7.7" x 7.7" x 1.61")
	Weight	2551g (5.5 lbs)

2.4GHz Table

Operating Band	Operating Mode	Data Rate	TX Power	RX Sensitivity
2.4 GHz	802.11b	1 Mb/s	27 dBm	-96 dBm
		2 Mb/s	27 dBm	-93 dBm
		5.5 Mb/s	27 dBm	-91 dBm
		11 Mb/s	27 dBm	-89 dBm
2.4 GHz	802.11g	6 Mb/s	27 dBm	-91 dBm
		9 Mb/s	27 dBm	-90 dBm
		12 Mb/s	27 dBm	-88 dBm
		18 Mb/s	26 dBm	-87 dBm
		24 Mb/s	26 dBm	-84 dBm
		36 Mb/s	26 dBm	-81 dBm
		48 Mb/s	25 dBm	-76 dBm
		54 Mb/s	25 dBm	-75 dBm
2.4 GHz	802.11n (HT20)	MCS0 / MCS8	27/27 dBm	-91/91 dBm
		MCS1 / MCS9	27/27 dBm	-88/88 dBm
		MCS2 / MCS10	26/26 dBm	-85/85 dBm
		MCS3 / MCS11	26/26 dBm	-82/82 dBm
		MCS4 / MCS12	25/25 dBm	-79/79 dBm
		MCS5 / MCS13	25/25 dBm	-75/75 dBm
		MCS6 / MCS14	25/25 dBm	-73/73 dBm
		MCS7 / MCS15	24/24 dBm	-70/70 dBm

2.4 GHz	802.11n (HT40)	MCS0 / MCS8	27/27 dBm	-89/89 dBm
		MCS1 / MCS9	27/27 dBm	-86/86 dBm
		MCS2 / MCS10	26/26 dBm	-83/83 dBm
		MCS3 / MCS11	26/26 dBm	-80/80 dBm
		MCS4 / MCS12	25/25 dBm	-77/77 dBm
		MCS5 / MCS13	25/25 dBm	-73/73 dBm
		MCS6 / MCS14	25/25 dBm	-72/72 dBm
		MCS7 / MCS15	24/24 dBm	-70/70 dBm

5GHz Table

5GHz Receive Sensitivity & Transmit Power

Operating Mode	Data Rate / MCS Index	TX Power (dBm)	RX Sensitivity (dBm)
802.11a	6 Mb/s	26	-90
	9 Mb/s	26	-87
	12 Mb/s	26	-86
	18 Mb/s	26	-85
	24 Mb/s	25	-84
	36 Mb/s	25	-79
	48 Mb/s	25	-74
	54 Mb/s	26	-71
802.11n (HT20)	MCS0/8	26/26	-88/-88
	MCS1/9	26/26	-85/-85
	MCS2/10	25/25	-83/-83
	MCS3/11	25/25	-79/-79
	MCS4/12	24/24	-76/-76
	MCS5/13	24/24	-72/-72
	MCS6/14	23/23	-71/-71
	MCS7/15	23/23	-69/-69
802.11n (VHT20)	MCS0/0	26/26	-88/-88
	MCS1/1	26/26	-86/-86
	MCS2/2	25/25	-83/-83
	MCS3/3	25/25	-79/-79
	MCS4/4	24/24	-77/-77
	MCS5/5	24/24	-75/-75
	MCS6/6	23/23	-72/-72
	MCS7/7	23/23	-70/-70
	MCS8/8	22/22	-67/-67

802.11n (HT40)	MCS0/8	26/26	-85/-85
	MCS1/9	26/26	-84/-84
	MCS2/10	25/25	-84/-84
	MCS3/11	25/25	-79/-79
	MCS4/12	24/24	-77/-77
	MCS5/13	24/24	-72/-72
	MCS6/14	23/23	-70/-70
	MCS7/15	23/23	-68/-68
802.11n (VHT40)	MCS0/0	26/26	-85/-85
	MCS1/1	26/26	-82/-82
	MCS2/2	25/25	-79/-79
	MCS3/3	25/25	-77/-77
	MCS4/4	24/24	-74/-74
	MCS5/5	24/24	-70/-70
	MCS6/6	23/23	-68/-68
	MCS7/7	23/23	-67/-67
	MCS8/8	22/22	-64/-64
	MCS9/9	22/22	-63/-63
802.11ac (VHT80)	MCS0/0	26/26	-83/-83
	MCS1/1	26/26	-81/-81
	MCS2/2	25/25	-79/-79
	MCS3/3	25/25	-76/-76
	MCS4/4	24/24	-73/-73
	MCS5/5	24/24	-70/-70
	MCS6/6	23/23	-67/-67
	MCS7/7	23/23	-66/-66
	MCS8/8	22/22	-62/-62
	MCS9/9	22/22	-60/-60

