



26-Port Full Gigabit PoE Fiber Switch (NAV-P-24P2S)

High-Performance L3 Managed PoE Switch

The NAV-P-24P2S is a Gigabit PoE fiber switch designed for high-density power supply environments. It features 24x 10/100/1000M RJ45 ports and 2x 1000M uplink SFP fiber ports, providing seamless connectivity for wireless APs, IP cameras, and VoIP phones.




Gigabit Access

Supports non-blocking wire-speed forwarding with a mix of Gigabit RJ45 and SFP ports, allowing users to build flexible networking for various scenarios.



Smart PoE Power

Complies with IEEE 802.3af/at standards. It automatically identifies PoE devices for power supply without damaging non-PoE equipment, with up to 30W per port.

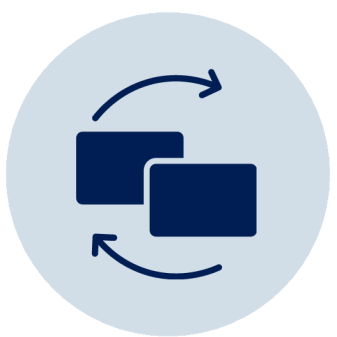

Stable & Reliable

Built with a galvanized steel metal shell and active fan cooling for excellent heat dissipation. Features high redundancy to ensure long-term, stable PoE power output.

Switching Capacity

52Gbps

Wire-Speed Forwarding


Power Budget

400W

IEEE 802.3 af/at Standard

Designed for ease of use, this unmanaged model offers plug-and-play functionality with no configuration required. It is the ideal solution for hotels, campuses, and small-to-medium enterprises requiring a secure, reliable network foundation for security monitoring and wireless coverage.

26-Port Full Gigabit PoE Fiber Switch (NAV-P-24P2S)

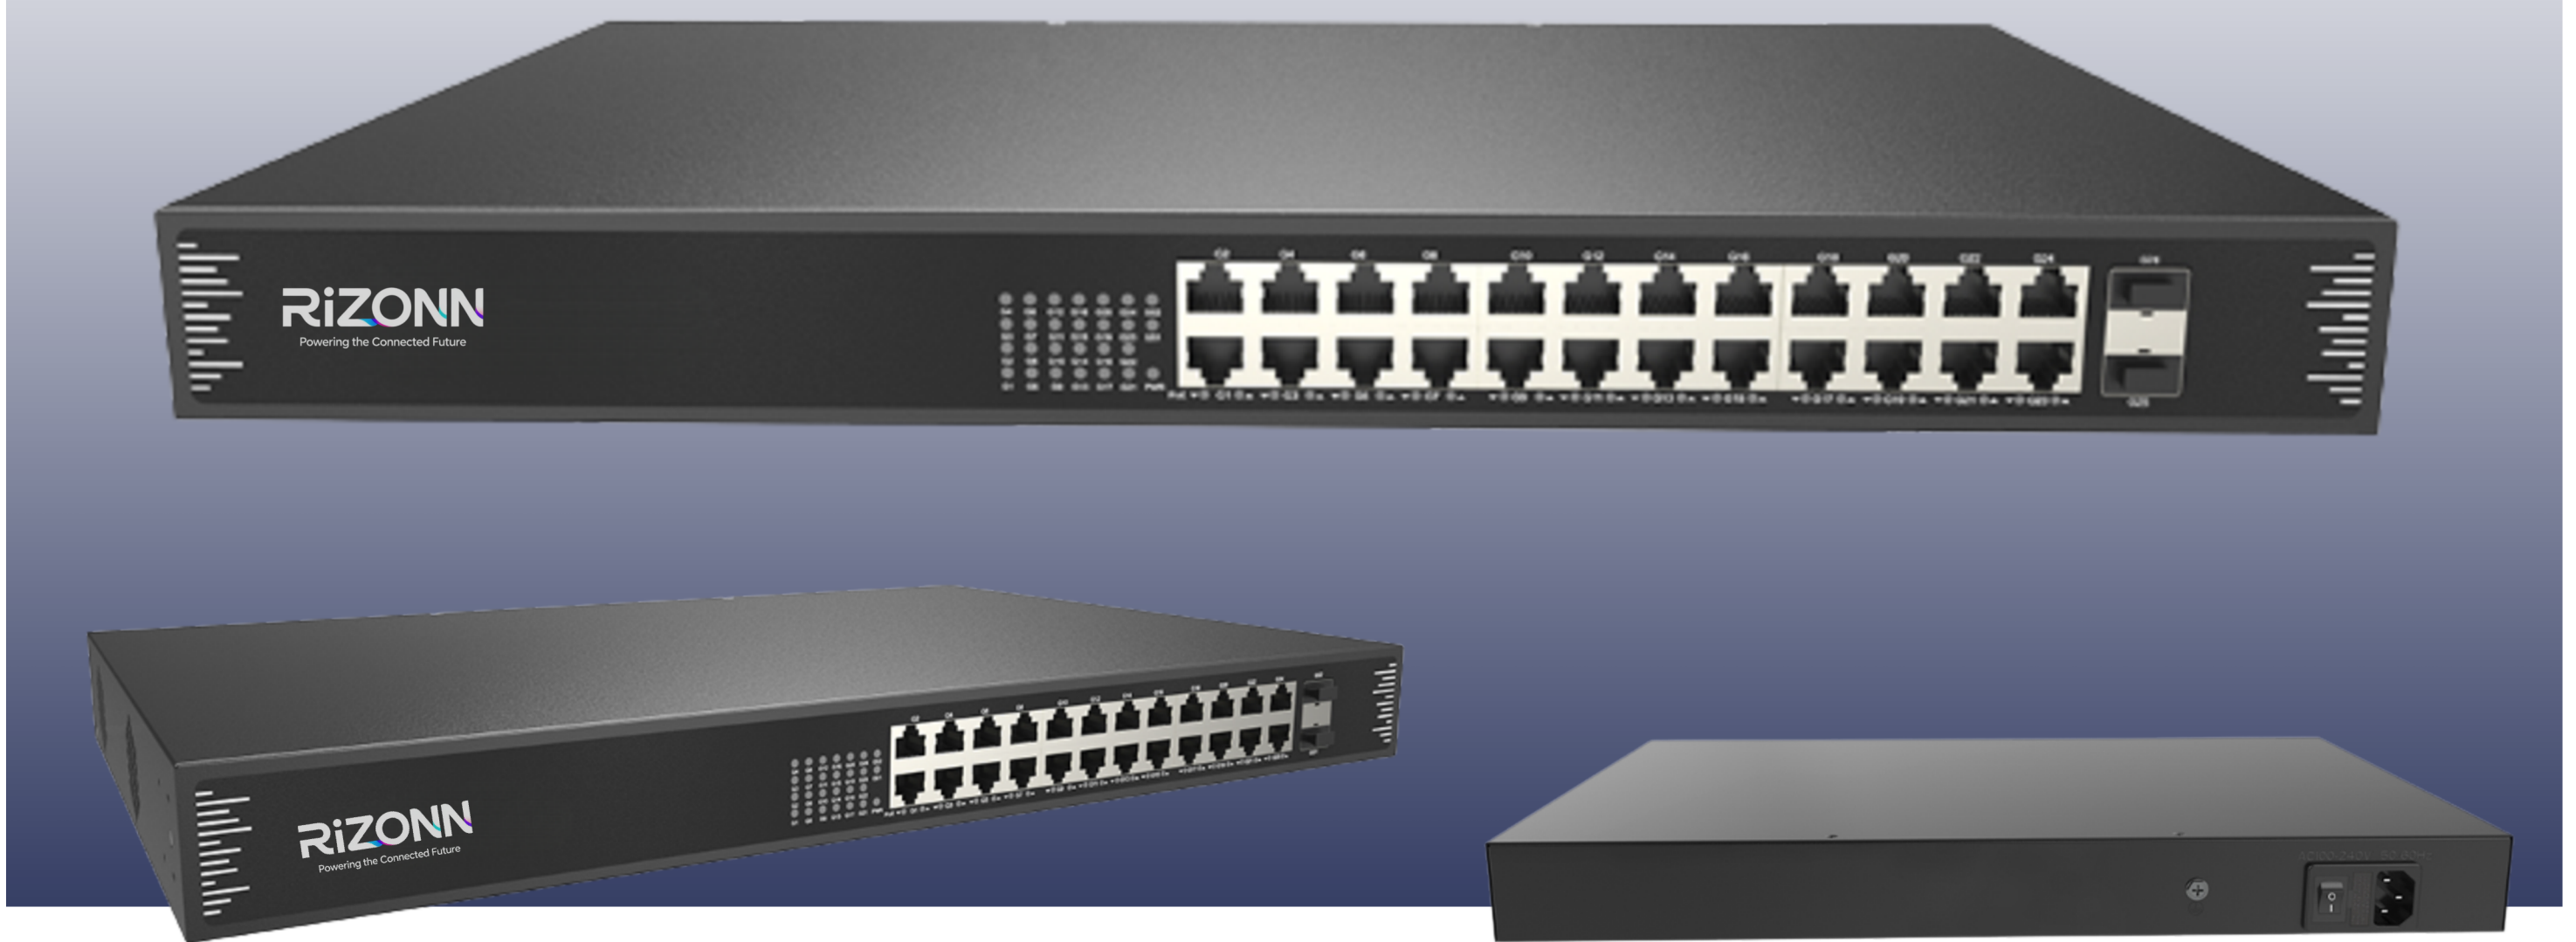

Product Overview

The **NAV-P-24P2S** is a Gigabit PoE fiber switch independently developed to address the requirements of high-density PoE power supply environments. It is equipped with 24 x 10/100/1000M adaptive RJ45 ports and 2 x 1000M uplink SFP fiber ports.

Ports 1–24 support the IEEE 802.3af/at standard, with single-port power output reaching up to 30W. As an intelligent PoE power supply device, the switch automatically detects and recognizes compliant power-receiving equipment, delivering power seamlessly through the network cable.

Designed for versatility, the NAV-P-24P2S can supply power to a wide range of PoE terminal equipment, including wireless Access Points (APs), IP cameras, VoIP phones, and building visual access control intercoms. This capability makes it an ideal solution for various settings, such as hotels, educational campuses, factory dormitories, and small to medium-sized enterprises (SMEs). The device is an unmanaged model featuring a plug-and-play design, requiring no configuration, which ensures it is easy to deploy and use.

Key Features

Gigabit Access & Uplink

- 24× 10/100/1000M RJ45 ports + 2× Gigabit SFP fiber uplink ports.
- Supports non-blocking wire-speed forwarding for flexible networking.

Smart PoE Power Supply

- Supports IEEE 802.3af/at standards with up to 30W output per port.
- Auto-detects PoE devices and prioritizes power to prevent overload.

High-Performance Processing

- 52Gbps switching capacity with Store and Forward mode.
- Supports Full-duplex IEEE 802.3x and Backpressure half-duplex flow control.

Stable & Reliable Design

- Features a galvanized steel metal shell with active fan cooling for heat dissipation.
- Includes a self-developed power supply with high redundancy and stability.

Plug-and-Play Simplicity

- The unmanaged model requires no configuration for easy deployment.
- User-friendly panel with LED indicators for PWR, Link, and PoE status.


A 26-port Gigabit PoE fiber switch featuring 24 PoE ports and 2 SFP uplinks. Designed for high-density environments like hotels and campuses, it delivers reliable power and data transmission with zero configuration required.

Technical Specification


Model	NAV-P-24P2S	NAV-P-24P2S-at
Interface Characteristics		
Fixed Port	21000Base-X uplink SFP fiber ports (Data) 2410/100/1000Base-T PoE ports (Data /Power)	(Same)
Ethernet Port	Port 1-24 can support 10/100/1000Base-T auto-sensing, full/ half duplex MDI/ MDI-X self-adaption	(Same)
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤100 meters) 100BASE-TX: Cat5 or later UTP (≤100 meters) 1000BASE-T: Cat5e or later UTP (≤100 meters)	(Same)
Optical Fiber Port	Gigabit optical fiber interface, default no include optical module (optional single-mode/ multi-mode, single fiber/ dual fiber optical module. LC)	(Same)
Optical Cable	Multi-mode: 850nm/0-500m Single-mode: 1310nm/0-40km, 1550nm/ 0-120km	(Same)
Chip Parameter		
Network Protocol	IEEE 802.3 10BASE-T, IEEE 802.3i 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3ab 1000Base-T, IEEE 802.3z 1000Base-X, IEEE 802.3x	(Same)
Forwarding Mode	Store and Forward (Full Wire Speed)	(Same)
Switching Capacity	52Gbps	(Same)
Forwarding Rate	38.69Mpps (@64byte)	(Same)
MAC Address Table	8K	(Same)
Buffer Memory	4M	(Same)
Jumbo Frame	9.6K	(Same)
LED Indicator	Power: PWR (Green), Network: 1-24/ G1-2 (Green), PoE: PoE (Green)	(Same)
PoE & Power Supply		
PoE Port	Port 1-24	(Same)
Power Supply Pin	1/2(+) 3/6 (-)	(Same)
Max Power Per Port	30W, IEEE 802.3 af/at	(Same)
Total PWR / Input Voltage	400W / (AC100-240V)	600W / (AC100-240V)
Power Consumption	Standby < 25W, Full load < 380W	Standby < 26W, Full load < 600W
Power Supply	Built-in power supply, AC100~240V 50-60Hz, 5.0A	Built-in power supply, AC100~240V 50-60Hz, 6.6A

Physical Parameter		
Operation TEMP / Humidity	-20~+55°C, 5%~90% RH Non condensing	(Same)
Storage TEMP / Humidity	-40~+75°C, 5%~95% RH Non condensing	(Same)
Dimension (\$L \times W \times H\$)	440 \times 225 \times 44mm	440 \times 290 \times 44.5mm 26
Net / Gross Weight	3.0kg / 3.7kg 27	3.2kg / 3.9kg 28
Installation	Desktop, wall mount, 1U/19" cabinet	(Same)
Certification & Warranty		
Lightning Protection	Lightning protection: 4KV 8/20us, Protection level: IP30	(Same)
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS	(Same)
Warranty	3 years, lifelong maintenance	(Same)


Dimensions

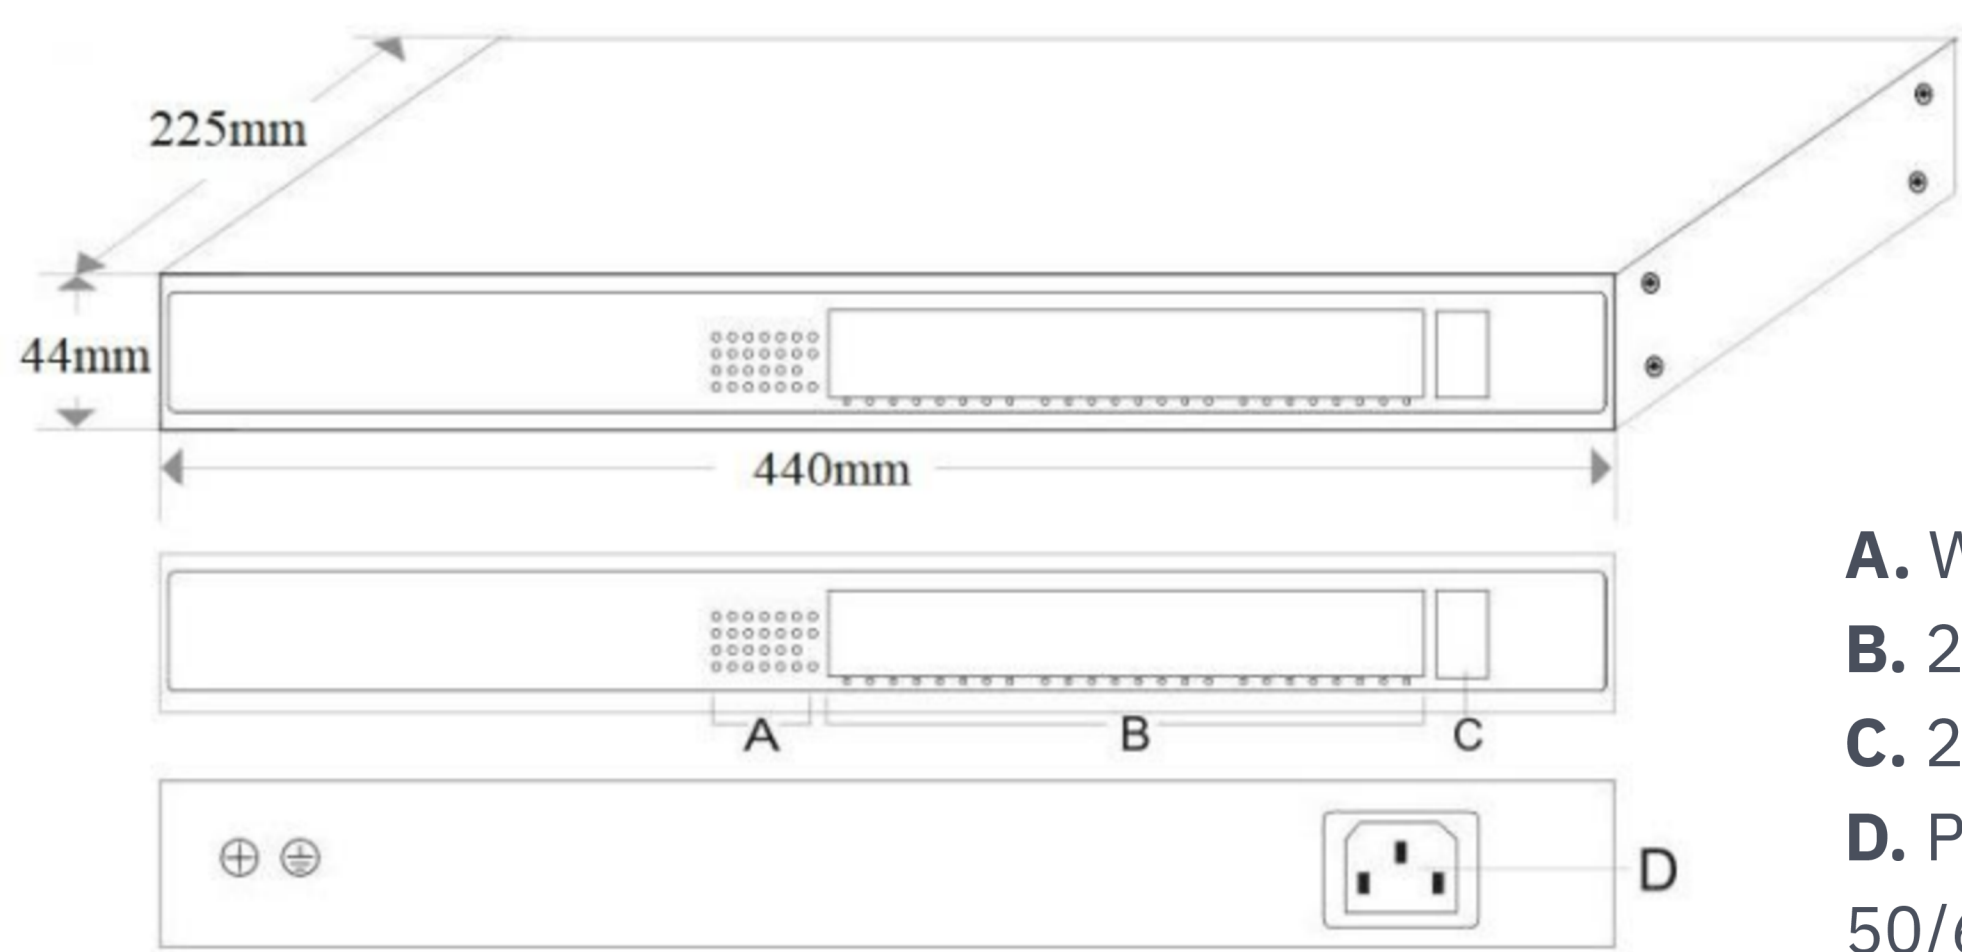

- A.** Working indicator
- B.** 24*10/100/1000M PoE ports
- C.** 2*1000M uplink SFP fiber ports
- D.** Power input port AC100-240V, 50/60Hz

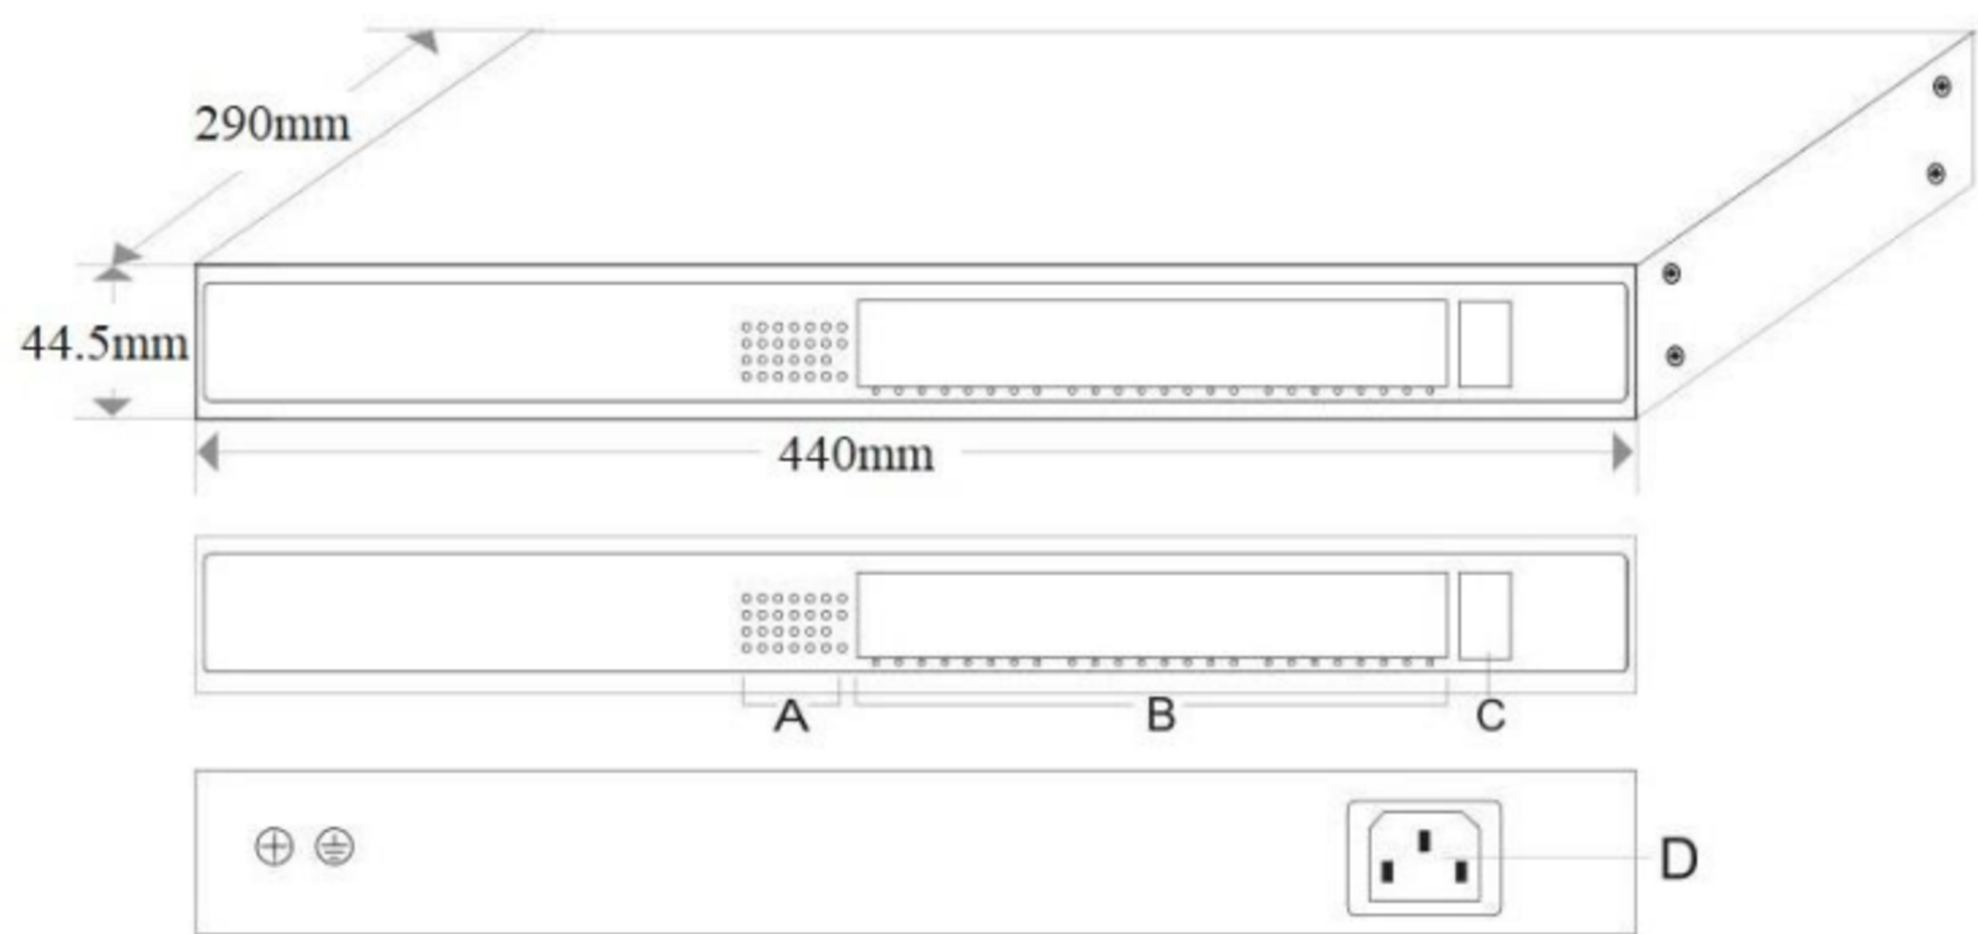

Applications

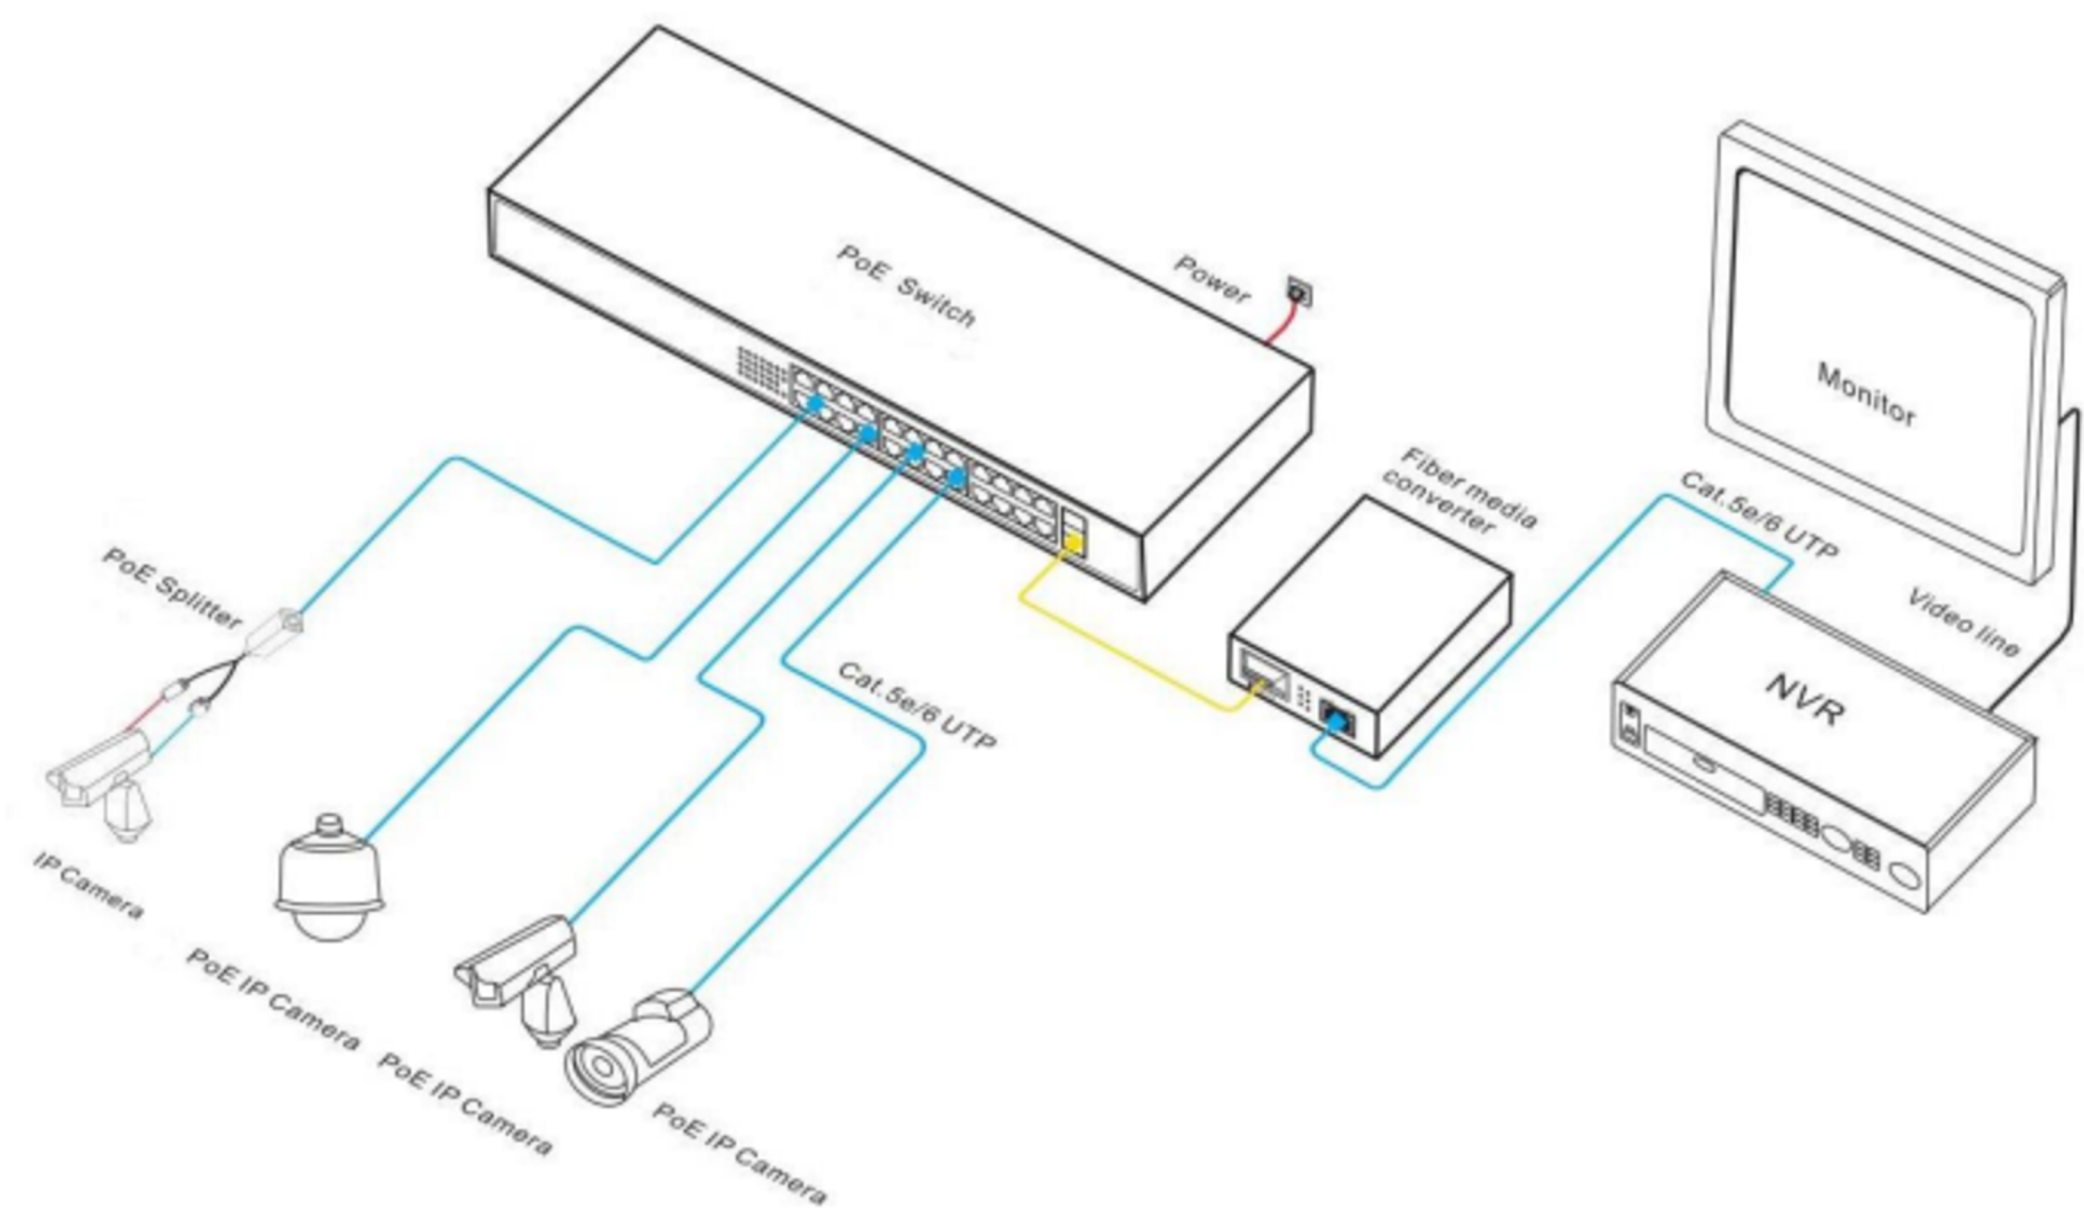

Ordering Information

Model	Description	Built-in Power Supply
NAV-P-24P2S	Unmanaged PoE fiber switch with 24*10/100/1000M RJ45 ports and 2*1000M uplink SFP fiber ports. Port 1-24 can support IEEE 802.3 af/at PoE standard. Built-in power supply and 1U/19" cabinet installation.	400W
NAV-P-24P2S-at	Unmanaged PoE fiber switch with 24*10/100/1000M RJ45 ports and 2*1000M uplink SFP fiber ports. Port 1-24 can support IEEE 802.3 af/at PoE standard. Built-in power supply and 1U/19" cabinet installation.	600W
Note: The optical module is not included and needs to be purchased.		

Packing List

Content	Qty	Unit
26-port full gigabit PoE fiber switch	1	SET
AC power cable	1	PC
Mounting Kits	1	SET
User Guide	1	PC
Warranty Card	1	PC

Optical Module

Product	Model	Description	Unit
1.25G Optical Module	2630	SFP optical module, 1.25G multi-mode dual fiber 850nm, transmission distance: 550m, LC interface. Support DDM function and hot plugging.	PC
	2632	SFP optical module, 1.25G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface. Support DDM function and hot plugging.	PC
	2612-T	SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, LC interface. Support DDM function and hot plugging.	PC
	2613-R	SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, LC interface. Support DDM function and hot plugging.	PC
	2612-T-SC	SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, SC interface. Support DDM function and hot plugging.	PC
	2613-R-SC	SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, SC interface. Support DDM function and hot plugging.	PC
Power Module	2633	1.25G SFP optical module transfers to 10/100/1000M RJ45 port.	PC