



28-Port 10G Uplink Managed PoE Switch (NAV-P-24P4S)

High-Performance L3 Managed PoE Switch

The NAV-P-24P4S is a 10G uplink managed PoE switch featuring 24* 10/100/1000Base-T adaptive RJ45 ports and 4* 1/10G uplink SFP+ fiber ports. It supports the IEEE 802.3 af/at standard with intelligent power management for high-density networks.




Gigabit Access with 10G Uplink

Features wire-speed forwarding with 4* 1/10G SFP+ fiber ports, enabling flexible networking for various high-bandwidth scenarios.



Smart PoE Power Supply

24 Gigabit ports support IEEE 802.3af/at. The system automatically identifies PoE devices and prioritizes power allocation to prevent overloading.



L2+ Management

Supports IPv4/IPv6 management, secure ACL/QoS strategies, and rich VLAN functions for easy maintenance and complete security protection.

Switching Capacity

176 Gbps

Non-blocking Wire-speed

Power Budget

400W

Built-in AC 100-240V Supply

Suitable for hotels, campuses, and SMEs, this switch powers wireless APs and cameras via network cables. It ensures stability with a galvanized steel housing, excellent heat dissipation, and a 3-year warranty for reliable long-term operation.

28-Port 10G Uplink Managed PoE Switch (NAV-P-24P4S)



Product Overview

The **NAV-P-24P4S** is a 10G uplink managed PoE switch featuring 24x 10/100/1000Base-T adaptive RJ45 ports and 4x 1/10G uplink SFP+ fiber ports. Ports 1–24 support the IEEE 802.3af/at PoE standard, with a maximum power output of 30W per port.

As a dedicated PoE power supply device, the switch automatically detects and identifies compliant power-receiving devices, delivering power via the network cable. It is designed to power a wide range of PoE terminals, including wireless APs, network cameras, VoIP phones, and video access control systems.

The NAV-P-24P4S is ideal for high-density PoE environments such as hotels, campuses, parks, supermarkets, and small-to-medium enterprises (SMEs) looking to build cost-effective and efficient networks. It features Layer 2+ (L2+) management capabilities, including IPv4/IPv6 management, static routing, comprehensive security mechanisms, robust ACL/QoS strategies, and extensive VLAN functions for simplified management.

Key Features

High-Speed Access

- 24× Gigabit RJ45 PoE+ ports with 4× 1/10G SFP+ fiber uplinks for flexible networking.
- Non-blocking wire-speed forwarding with 176Gbps switching capacity.

Comprehensive Security

- Features Port isolation, broadcast storm suppression, and IP+MAC+Port+VLAN binding.
- Supports 802.1X authentication and L2-L4 ACL packet filtering strategies.

L2+ Service Capabilities

- Supports ERPS ring network (<20ms) and STP/RSTP/MSTP for rapid redundancy.
- Includes Voice VLAN, QinQ, Link Aggregation (LACP), and IGMP Snooping for HD video.

Smart PoE & Reliability

- **Smart Power:** Auto-identifies PoE devices with priority scheduling to prevent overload.
- **Design:** Galvanized steel metal housing with active fan cooling for stable operation.

O&M Management

- Supports Web (HTTPS), CLI (Console/Telnet), SSH V1/V2, and SNMP V1/V2/V3.
- Includes CPU/Memory monitoring, Ping detection, and cable length diagnostics.


A powerful L2+ managed switch with 24 Gigabit PoE ports and 10G uplinks, designed for high-density networks. It delivers 30W/port power, robust security, and ring redundancy, making it ideal for campus, hotel, and SME coverage.

Technical Specification

Feature	Description
Model	NAV-P-24P4S (Base Model) / NAV-P-24P4S-at (High Power Model)
Interface Characteristics	
Fixed Port	4* 1/10G uplink SFP+ fiber ports (Data) 24* 10/100/1000Base-T PoE ports (Data/ Power)
Console Port	1* Console RS232 port (115200, N, 8, 1)
Ethernet Port	Port 1-24 supports 10/100/1000Base-T(X) auto-sensing, full/half duplex MDI/MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3, 4, 5 UTP (≤100 meters) 100BASE-TX: Cat5 or later UTP (≤100 meters) 1000BASE-T: Cat5e or later UTP (≤100 meters)
Optical Fiber Port	1/10G SFP+ optical fiber port, default does not include optical module (optional single-mode/multi-mode, single fiber/dual fiber optical module. LC)
Optical Cable/ Distance	Multi-mode: 850nm / 0-550m, 0-300m (10G) Single-mode: 1310nm / 0-40km, 1550nm / 0-120km
Chip Parameters	
Network Management Type	L2+
Network Protocols	IEEE 802.3 10BASE-T, IEEE 802.3i 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3ab 1000Base-T, IEEE 802.3z 1000Base-X, IEEE 802.3ae 10GBase-LR/SR, IEEE 802.3x
Forwarding Mode	Store and Forward (Full wire speed)
Switching Capacity	176Gbps (Non-blocking)
Forwarding Rate @64byte	95.23Mpps
CPU	500M
DRAM	2G
FLASH	128M
MAC Address Table	32K
Buffer Memory	32M
Jumbo Frame	9.6K
LED Indicator	Power: PWR (Yellow), System: SYS (Yellow), Network: Link (Yellow), PoE: PoE (Green), Fiber port: L/A (Green)
Reset Switch	Yes
PoE & Power Supply	
PoE Port	Port 1-24
PoE Management	PoE power supply total power limit configuration, Power delay start, PoE work and time scheduling, Port PoE working status display, Port PoE output priority configuration, Port PoE output power distribution, PoE on/off, af/at power distribution
Power Supply Pin	1/2(+) 3/6 (-)
Max Power Per Port	30W, IEEE 802.3 af/at
Total PWR / Input Voltage	NAV-P-24P4S: 400W / (AC100-240V) NAV-P-24P4S-at: 600W / (AC100-240V)
Power Consumption	NAV-P-24P4S: Standby <30W, Full Load <400W NAV-P-24P4S-at: Standby <25W, Full Load <600W
Power Supply	NAV-P-24P4S: Built-in power supply, AC100~240V 50-60Hz, 5.0A NAV-P-24P4S-at: Built-in power supply, AC100~240V 50-60Hz, 6.6A

Physical Parameters	
Operation Temp/ Humidity	-20~+55°C, 5%~90% RH non-condensing
Storage Temp/ Humidity	-40~+80°C, 5%~95% RH non-condensing
Dimension (L*W*H)	44029044.5mm
Net / Gross Weight	NAV-P-24P4S: 4.0kg / 4.8kg NAV-P-24P4S-at: 4.3kg / 5.2kg
Installation	Desktop, 1U/19" cabinet
Certification & Warranty	
Lightning Protection	Lightning protection: 4KV 8/20us, Protection level: IP30
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15, RoHS
Warranty	3 years, lifelong maintenance
Network Management Features	
Interface	Port temperature protection setting, IEEE 802.3x flow control (Full duplex), Port green Ethernet Energy-saving setting, Broadcast storm control based on port speed, Limit the speed of the message traffic at the inbound and outbound ports, Mini granularity is 64Kbps
L3 Features	L2+ network management function, IPV4/ IPV6 management, L3 routing and forwarding, Support communication between different network segments and different VLANs, ARP protocol (max 1024 entries), Static route/default route (max 128 entries)
VLAN	4K VLAN based on port, IEEE802.1q, Port configuration of Access, Trunk, Hybrid, VLAN based on MAC address, QinQ configuration, Voice VLAN
Port Aggregation	LACP, Static aggregation, Max 14 aggregation groups and 8 ports per group
Spanning Tree	STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)
ERPS Ring Network	G.8032 (ERPS), recovery time less than 20ms, 255 Ring at most, Max 1024 devices per ring
Multicast	IGMP Snooping v1/v2/v3, Max 1024 multicast groups, MLD Snooping, Multicast VLAN, User quick exit mechanism
Port Mirroring	Bidirectional data mirroring based on port
QoS	Flow-based packet filtering, Priority Mark/ Remark, Flow-based redirection, Flow-based rate limiting, 8* Output queues of each port, 802.1p/ DSCP priority mapping, Diff-Serv QoS, Queue Scheduling Algorithm (SP, WRR, SP+WRR)
ACL	ACL distribution based on port and VLAN, L2-L4 packet filtering function (matching the first 80 bytes message), ACL definitions based on source/destination MAC, source/destination IP, IP protocol type, TCP/UDP port, TCP/UDP port range, VLAN, etc.
Security	IEEE802.1X & MAC address authentication, IP-MAC-VLAN-Port binding, MAC learning limit, Broadcast storm control, Backup for host datum, Mac black holes, IP source protection, Anti-DoS attack, SSH 2.0, SSL, Port isolation, ARP message speed limit, User hierarchical management and password protection, AAA & RADIUS & TACACS+ certification, ARP inspection
DHCP	DHCP Client, DHCP Snooping, DHCP Server, DHCP Relay
Management	System work log, Link Layer Discovery Protocol (LLDP), NTP clock, Cable length detection, SNMP V1/V2/V3, Ping detection, Web network management (HTTPS), NMS platform cluster management (LLDP+SNMP), One click recovery, View CPU real-time utilization status, FTP, TFTP, Xmodem, SFTP file upload/download, Console/ AUX Modem/ Telnet/ SSH2.0 CLI command line configuration
System	Web browser: Mozilla Firefox 2.5 or higher, Google Chrome V42 or higher; TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, Mac OS X) installed on each computer in the network; Cat5 and above Ethernet cable

Dimensions

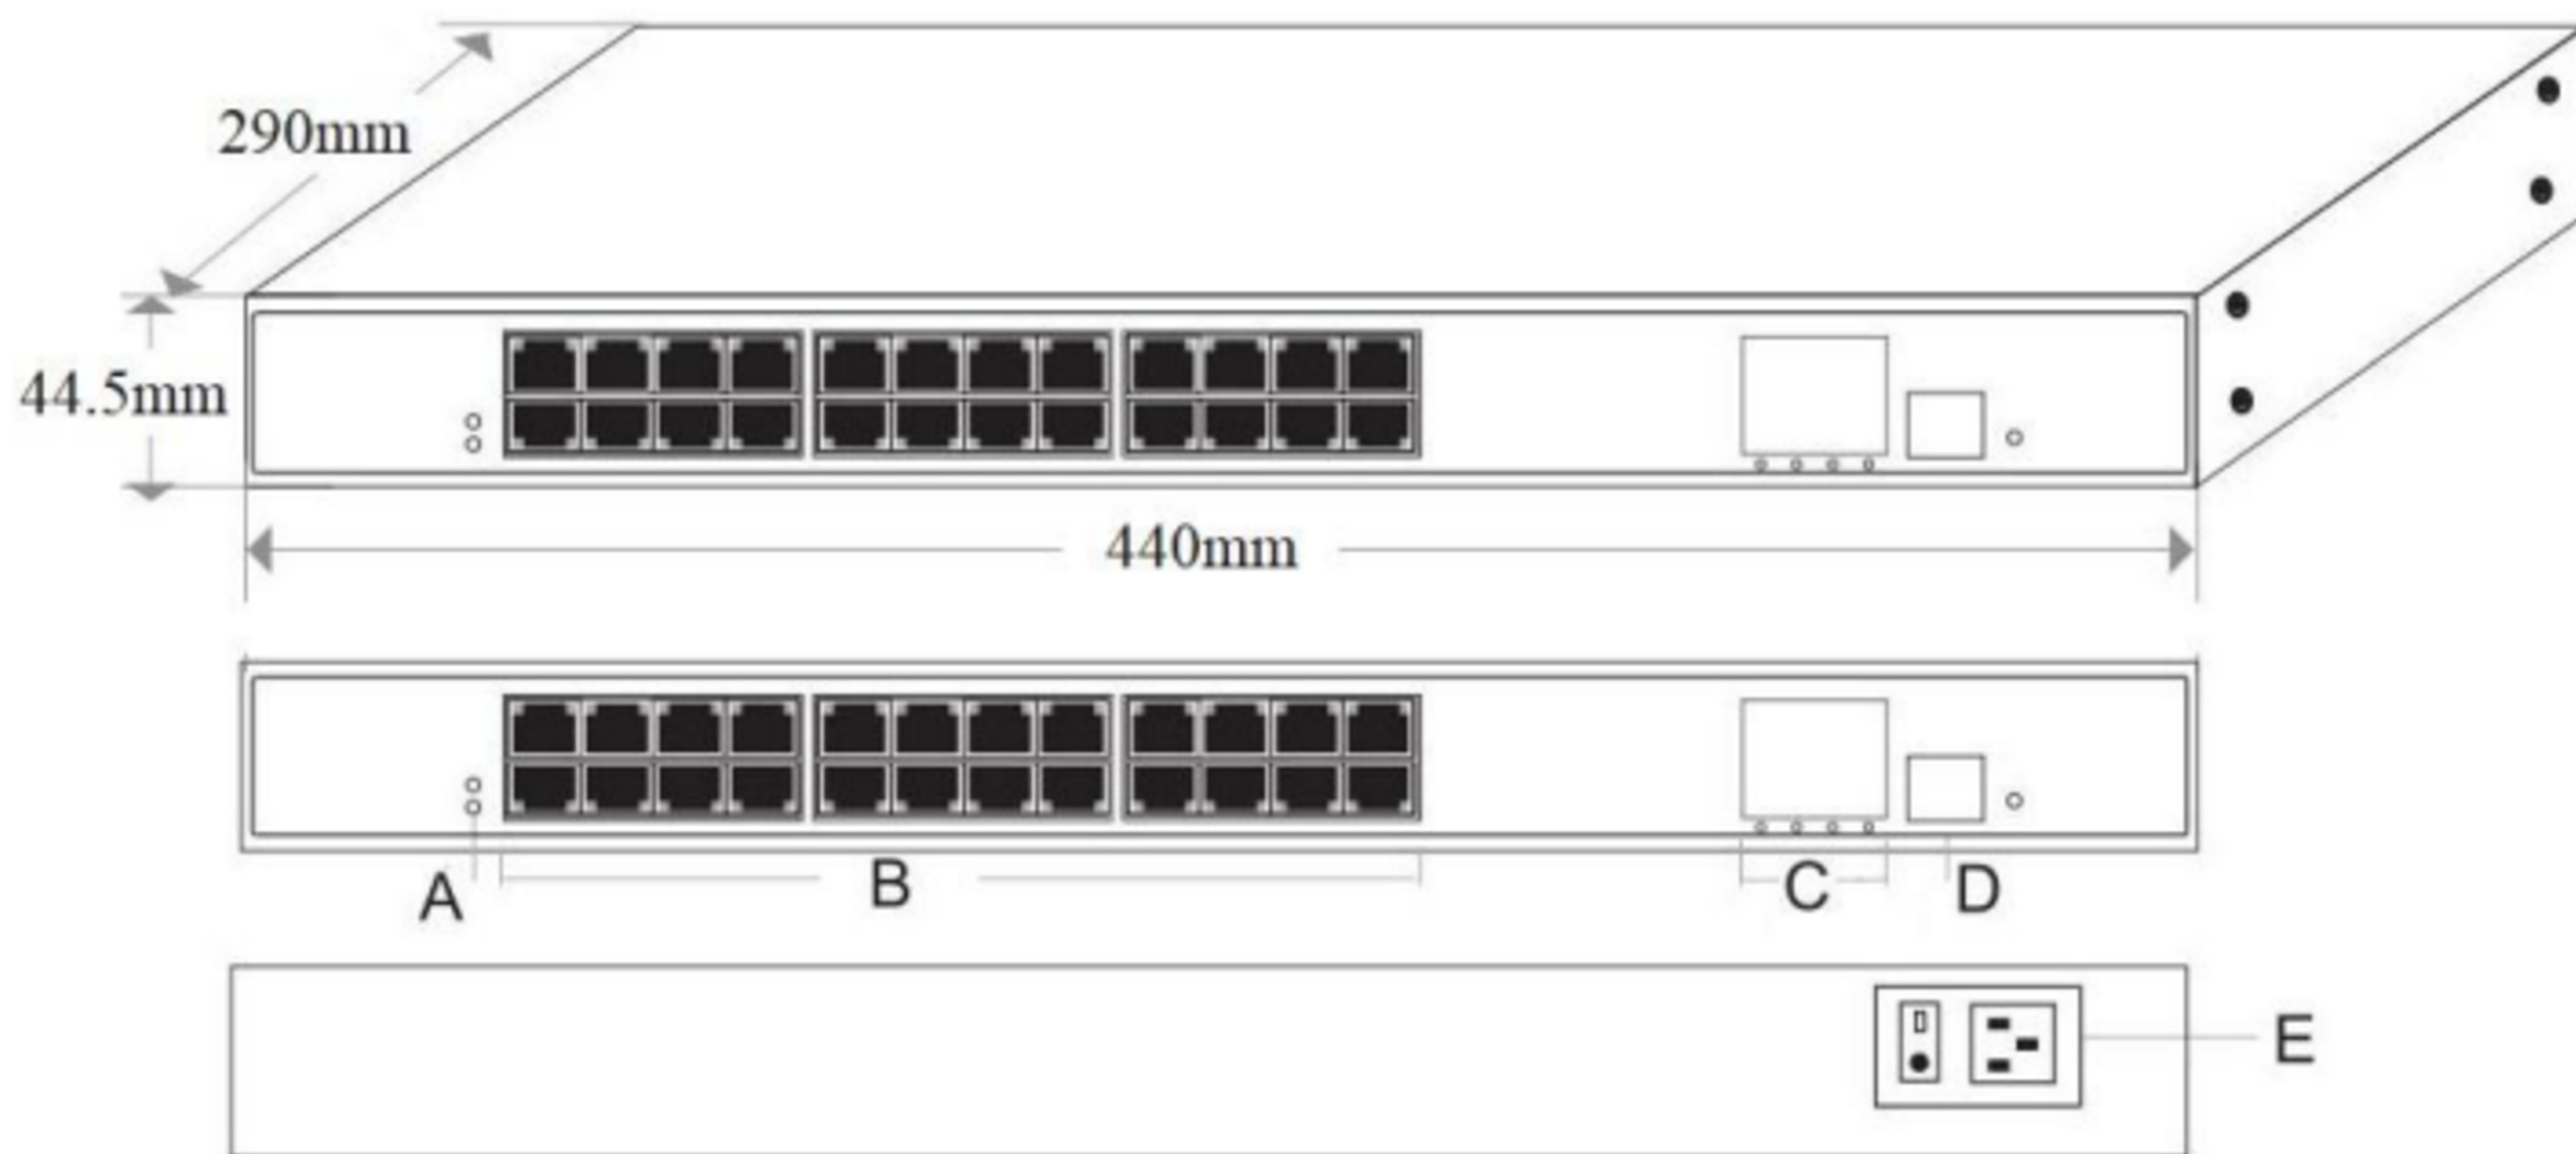

A. Working indicator


B. 24*10/100/1000M PoE ports

C. 4*10G uplink SFP+ fiber ports

D. Console port

E. Power input port AC100-240V, 50/60Hz

Applications

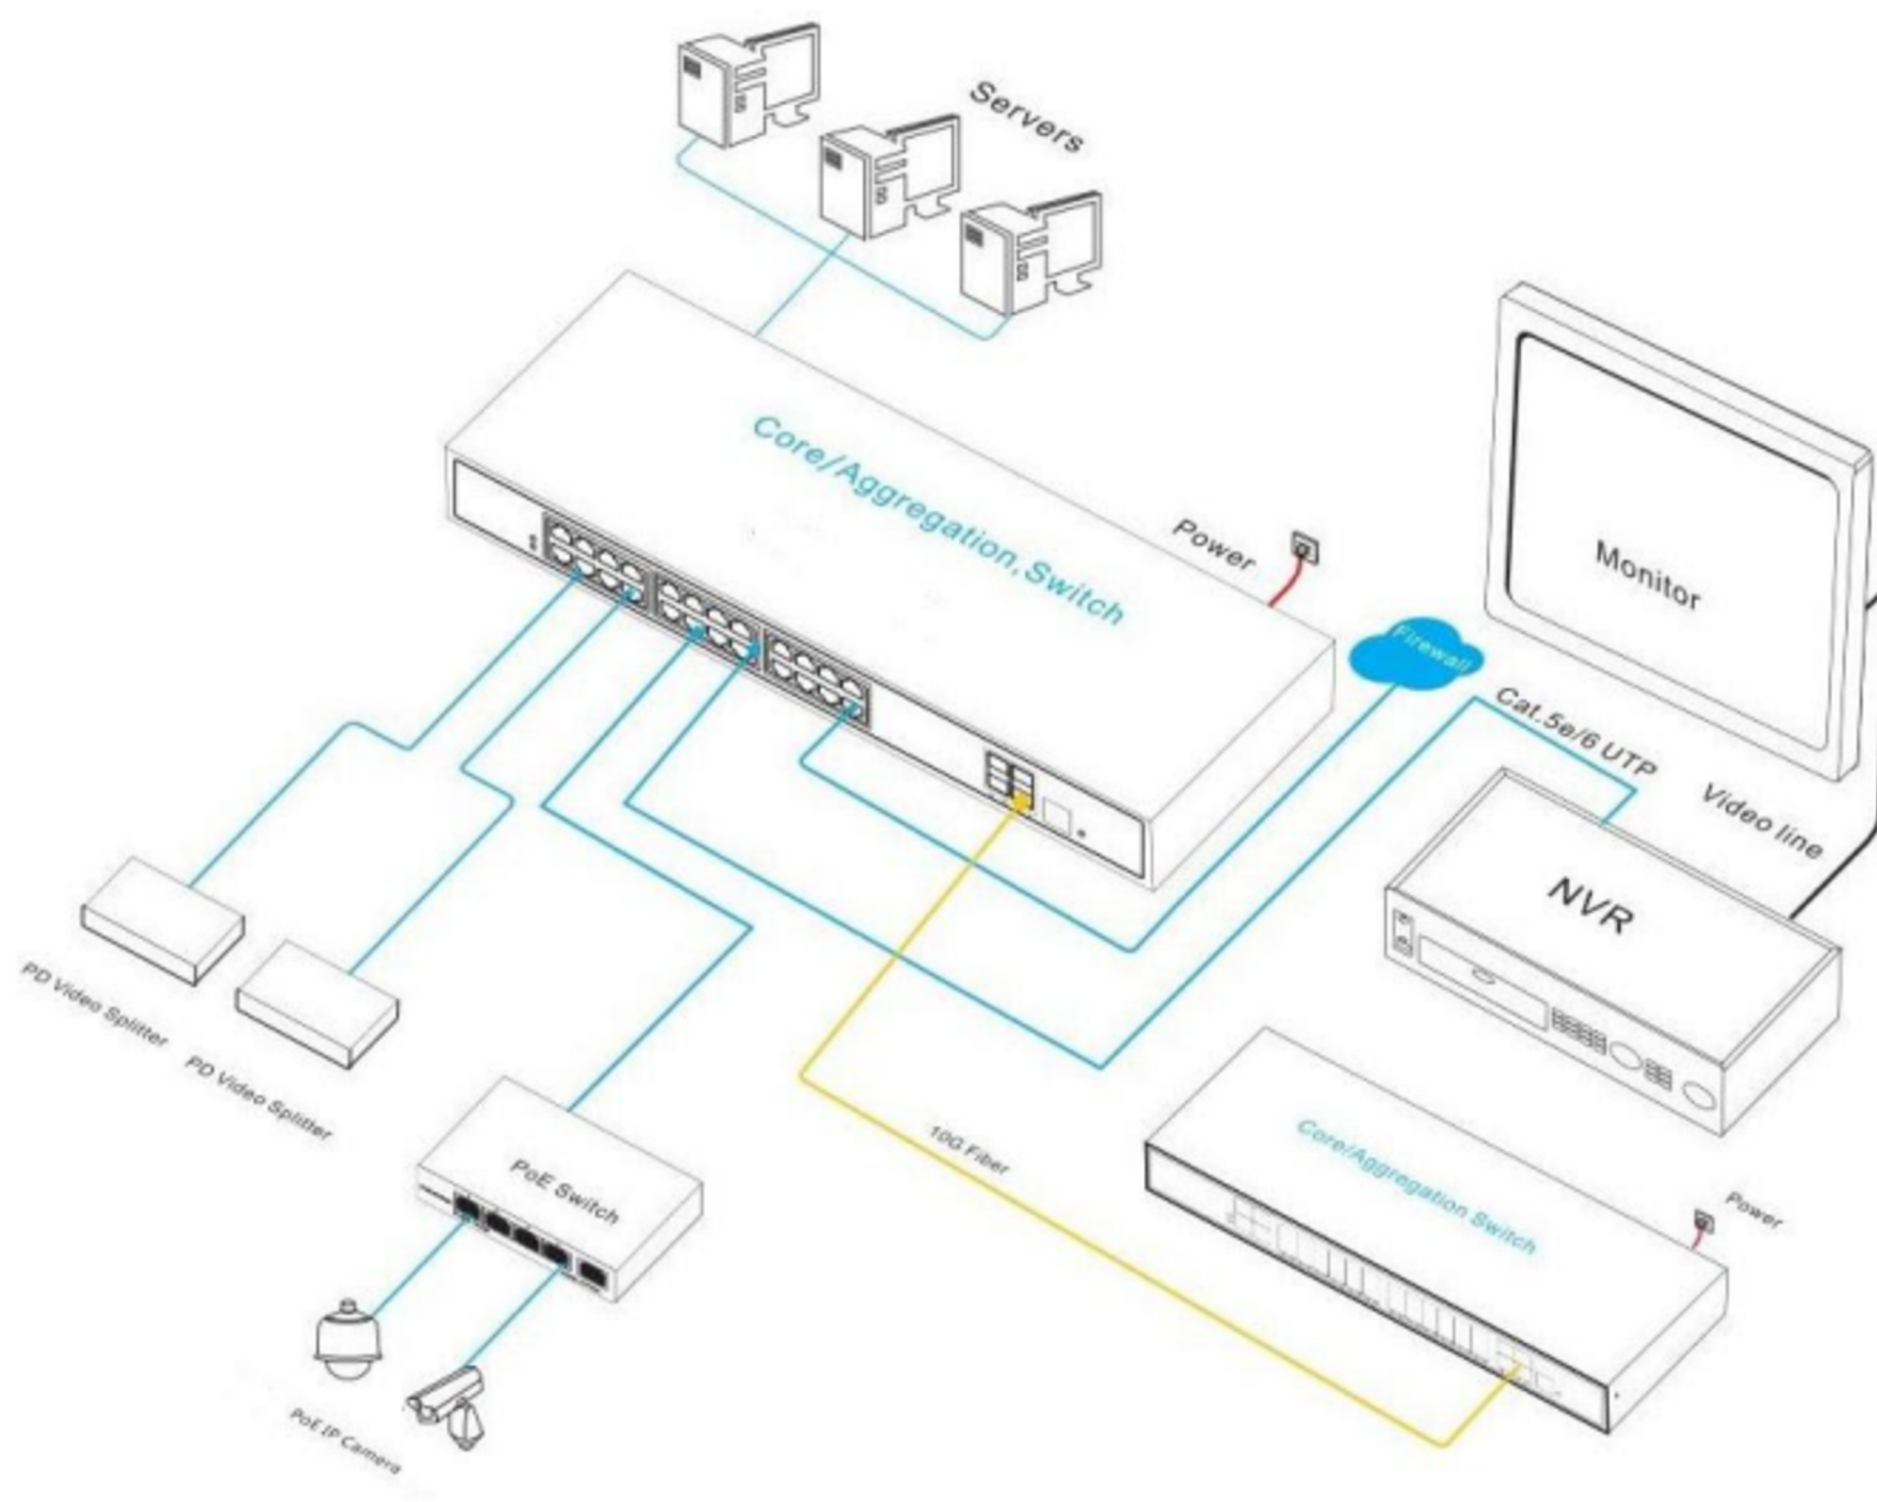

Ordering Information

Model	Description	Built-in Power Supply
NAV-P-24P4S	L2+ managed PoE fiber switch with 2410/100/1000M RJ45 ports and 41/10G SFP+ fiber ports. Port 1-24 can support IEEE 802.3af/at PoE standard. It built-in power supply and 1U/19" cabinet installation.	400W
NAV-P-24P4S-at	L2+ managed PoE fiber switch with 2410/100/1000M RJ45 ports and 41/10G SFP+ fiber ports. Port 1-24 can support IEEE 802.3af/at PoE standard. It built-in power supply and 1U/19" cabinet installation.	600W
The optical module is not included and needs to be purchased.		

Packing List

Content	Qty	Unit
28-port 10G uplink managed PoE switch	1	Set
AC Power Cable	1	PC
RJ45-DB9 Adapter Cable	1	PC
Mounting Kits (Hanging Ear)	1	Set
User Guide	1	PC
Warranty Card and Certificate of Conformity	1	PC

Optical Module

Product	Model	Description	Unit
1.25G Optical Module	2630	SFP optical module, 1.25G multi-mode dual fiber 850nm, transmission distance: 550m, LC interface. Support DDM function and hot plugging.	PC
	2632	SFP optical module, 1.25G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface. Support DDM function and hot plugging.	PC
	2612-T	SFP optical module, 1.25G single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, LC interface. Support DDM function and hot plugging.	PC
	2613-R	SFP optical module, 1.25G single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, LC interface. Support DDM function and hot plugging.	PC
	2612-T-SC	SFP optical module, 1.25G single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, SC interface. Support DDM function and hot plugging.	PC

	2613-R-SC	SFP optical module, 1.25G single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, SC interface. Support DDM function and hot plugging.	PC
Power Module	2633	1.25G SFP optical module transfers to 10/100/1000M RJ45 port.	PC
10G Optical Module	6630	SFP+ optical module, 10G multi-mode dual fiber 850nm, transmission distance: 300m, LC interface. Support DDM function and hot plugging.	PC
	7832	SFP+ optical module, 10G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface. Support DDM function and hot plugging.	PC
	7832-33	SFP+ optical module, 10G single-mode single fiber TX1330nm/RX1270nm, transmission distance: 20km, LC interface. Support DDM function and hot plugging.	PC
	7832-27	SFP+ optical module, 10G single-mode single fiber TX1270nm/RX1330nm, transmission distance: 20km, LC interface. Support DDM function and hot plugging.	PC