



36-Port 10G Uplink L3 Managed PoE Switch (NAV-P-24P8S-4S)

High-Performance L3 Managed PoE Switch

A high-performance Layer 3 managed fiber switch designed to meet the demands of high-density PoE networks. With 10G uplink capabilities and intelligent power management, the NAV-P-24P8S-4S ensures seamless data transmission and robust security for modern infrastructures.




Smart PoE Power Supply

Supports IEEE 802.3af/at standards with up to 30W per port. Automatically detects compliant devices to power Wireless APs and IP Cameras safely without damaging non-PoE equipment.



Flexible 10G Networking

Features 24× Gigabit PoE ports, 8× SFP fiber ports, and 4× 1/10G SFP+ uplinks. Ideal for building flexible, cost-effective networks in hotels, campuses, and commercial parks.

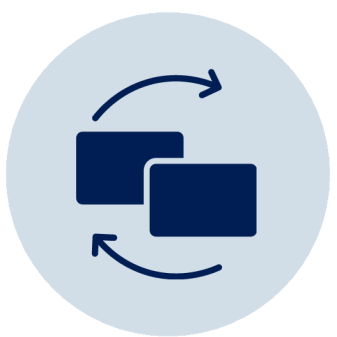

L3 Management & Security

Equipped with Layer 3 dynamic routing, IPv4/IPv6 management, and ERPS ring network protocol (<50ms recovery) to ensure uninterrupted communication and carrier-grade reliability.

Switching Capacity

176 Gbps

Non-blocking Wire-speed Forwarding

Power Budget

400W+

High Redundancy Power Supply

The NAV-P-24P8S-4S is built for stability with a self-developed power supply and active cooling design. It supports diverse management methods (Web, CLI, SNMP) and advanced security policies (ACL, QoS), making it the perfect choice for secure, high-speed video surveillance and teleconferencing systems.

36-Port 10G Uplink L3 Managed PoE Switch (NAV-P-24P8S-4S)



Product Overview

The **NAV-P-24P8S-4S** is a Layer 3 (L3) managed PoE fiber switch featuring 10G uplinks, independently developed to meet high-density network requirements. The device is equipped with 24x 10/100/1000Base-T adaptive RJ45 ports, 8x 100/1000Base-X SFP fiber ports, and 4x 1/10G uplink SFP+ fiber ports. Ports 1–24 support the IEEE 802.3af/at PoE standard, capable of delivering up to 30W per port.

Designed for versatility, the NAV-P-24P8S-4S is suitable for a wide range of environments, including hotels, campuses, parks, supermarkets, factories, and small-to-medium enterprises (SMBs), providing a cost-effective networking solution.

The switch features comprehensive L3 network management capabilities, including IPv4/IPv6 management, dynamic routing, and forwarding. It incorporates robust security mechanisms, complete ACL/QoS policies, and extensive VLAN functions for easy maintenance. To ensure network reliability, it supports multiple redundancy protocols such as STP/RSTP/MSTP (<50ms) and ERPS (ITU-T G.8032). If a network link fails, communication is quickly restored to ensure uninterrupted application performance. Users can configure various services—such as PoE power management, traffic control, VLAN division, and SNMP—via a web-based management interface.

Key Features

Versatile Interface Design

- 24× Gigabit PoE ports, 8× SFP fiber ports, and 4× 10G SFP+ uplinks.
- Supports non-blocking wire-speed forwarding and IEEE 802.3x full-duplex flow control.

Comprehensive Security

- Features Port isolation, broadcast storm control, and IP+MAC+VLAN binding.
- Includes 802.1X authentication and flexible ACL policies for secure access control.

Intelligent L3 Management

- L3 dynamic routing (IPv4/IPv6) with ERPS ring protocol (<50ms recovery).
- Supports Voice VLAN, QinQ, and advanced QoS with SP/WRR scheduling.

Industrial-Grade Reliability

- Galvanized steel metal shell with active fan cooling for efficient heat dissipation.
- Built-in high-redundancy power supply with 4KV lightning protection.

Simplified O&M Management

- Offers CPU/memory monitoring, Ping detection, and cable diagnostics for quick troubleshooting.
- Supports various management methods (Web, CLI, SNMP) with HTTPS, SSL, and SSH encryption for security.

A powerful Layer 3 managed switch featuring 36 ports (24 PoE + 12 Fiber) and 10G uplinks. Engineered for high-density networks, it combines smart PoE power management, rapid ring recovery, and robust security to ensure uninterrupted performance for surveillance and enterprise applications.


Technical Specification

Feature	Specification
Model	NAV-P-24P8S-4S / NAV-P-24P8S-4S-at
Interface Characteristics	
Fixed Port	1× Console RS232 port (115200,N,8,1) 4× 1/10G uplink SFP+ fiber ports (Data) 8× 100/1000Base-X SFP fiber ports (Data) 24× 10/100/1000Base-T PoE ports (Data/Power)
Ethernet Port	Port 1-24 can support 10/100/1000Base-T auto-sensing, full/ half duplex MDI/ MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤100 meters) 100BASE-TX: Cat5 or later UTP (≤100 meters) 1000BASE-T: Cat5e or later UTP (≤100 meters)
Optical Fiber Port	1/10G SFP+ optical fiber port, default no include optical module (optional single-mode/ multi-mode, single fiber/ dual fiber optical module. LC)
Optical Port Expansion	Turbo overclocking 2.5G optical module expansion and ring network
Optical Cable/ Distance	Multi-mode: 850nm/ 0-500m, 850nm/ 0-300m (10G) Single-mode: 1310nm/ 0-40km, 1550nm/ 0-120km
Chip Parameter	
Network Management Type	L3
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T, IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T, IEEE802.3z 1000Base-X, IEEE802.3ae 10GBase-SR/LR, IEEE802.3x
Forwarding Mode	Store and Forward (Full Wire Speed)
Switching Capacity	176Gbps (non-blocking)
Forwarding Rate	107.14Mpps @64byte
CPU	500MHz
DRAM	2G
FLASH	128M
MAC	32K
Buffer Memory	32M
Jumbo Frame	9.6K
LED Indicator	System: SYS (Green), Network: Link (Yellow), PoE: PoE (Green), Fiber port: L/A (Green)
Reset Switch	Yes, press and hold the switch for 10 seconds and release it to restore the factory settings
PoE & Power Supply	
PoE Port	Port 1-24
PoE Management	PoE power supply total power limit configuration Power delay start, PoE work and time scheduling Port PoE working status display, Port PoE output priority configuration Port PoE output power distribution, PoE on/off, af/at power distribution
Power Supply Pin	1/2(+) 3/6 (-)
Max Power Per Port	30W, IEEE 802.3 af/at

Total PWR / Input Voltage	NAV-P-24P8S-4S: 400W/ (AC100-240V) NAV-P-24P8S-4S-at: 600W/ (AC100-240V)
Power Consumption	400W Model: Standby<25W, Full Load<400W 600W Model: Standby<30W, Full Load<600W
Power Supply	Built-in power supply AC100~240V 50-60Hz
Physical Parameter	
Operation TEMP / Humidity	-20~+55°C, 5%~90% RH Non condensing
Storage TEMP / Humidity	-40~+80°C, 5%~95% RH Non condensing
Dimension (LWH)	44029044.5mm
Net / Gross Weight	400W Model: 4.1kg / 4.9kg 600W Model: 4.4kg / 5.3kg
Installation	Desktop, 1U/19" cabinet
Certification & Warranty	
Lightning Protection	Lightning protection: 4KV 8/20us, Protection level: IP30
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS
Warranty	3 years, lifelong maintenance.
Network Management Feature	
Interface	IEEE802.3x flow control (Full-duplex) Port temperature protection setting No connection port automatic sleep Port green Ethernet Energy-saving setting Broadcast storm control based on port speed SFP+ optical port DDMI real-time digital diagnosis The speed limit of the message flow in the access port, mini particle size is 64Kbps.
L3 Routing	IPV4 Equal Cost Routing NG protocol max 1000 entries ARP protocol max 1000 entries IPV4/IPV6 VRRP max group is 255 Pingv6, Telnetv6, TFTPv6, DNSv6, ICMPv6 IPV4/IPV6 VLANIF interface supports up to 128 IPV4/IPV6 static route/ default route supports up to 128 entries L3 network management function, IPV4/IPV6 dual-stack management IPV4 dynamic routing, RIPv1/v2, OSPFv2, BGP4+, 4000 routing entries IPV6 dynamic routing OSPFv3, BGP+, RIPv6, IPV6 management, 1000 routing entries L3 routing and forwarding, support communication between different network segments and different VLAN
VLAN	Voice VLAN, QinQ configuration, IEEE802.1q VLAN based on MAC, VLAN based on the protocol 4K VLAN based on port, Port configuration of Access, Trunk, Hybrid.


Port Aggregation	LACP dynamic aggregation, static aggregation Max 18 aggregation groups and 8 ports per group.
Spanning Tree	STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)
Ring Network Protocol	250 Ring at most, Max 250 devices per ring. G.8032 (ERPS), Recovery time less than 20ms
Multicast	MLD Snooping, Multicast VLAN, Fast log out IGMP Snooping v1/v2/v3, Max 1024 multicast groups
Port Mirroring	Bidirectional data mirroring based on port
QoS	Diff-Serv QoS, Priority Mark/Remark Queue Scheduling Algorithm (SP, WRR, SP+WRR) Flow-based Rate Limiting, Flow-based Packet Filtering 8*Output queues of each port, 802.1p/DSCP priority mapping
ACL	Port-based Issuing ACL, ACL based on port and VLAN L2 to L4 packet filtering, matching first 80 bytes message. Provide ACL based on MAC, Destination MAC address, IP Source, Destination IP, IP Protocol Type, TCP/UDP Port, TCP/UDP Port Range, and VLAN, etc. ARP message rate limiting function Port broadcast message suppression
Security	SSL ensures data transmission security AAA & RADIUS & TACACS+ certification Limit the number of MAC addresses learned Port isolation, Host data backup mechanism Anti-DoS attack, ARP intrusion detection function Quadruple binding function of IP+MAC+VLAN+port IP source address protection, MAC address black hole User hierarchical management and password protection SSH 2.0 provides a secure encrypted channel for user login IEEE802.1X authentication/centralized MAC address authentication
DHCP	DHCP Client, DHCP Snooping, DHCP Server, DHCP Relay
Management	System work log, Link Layer Discovery Protocol NTP clock, Cable length detection, SNMP V1/V2/V3 Ping detection, Web network management (HTTPS) NMS platform cluster management (LLDP+SNMP) One click recovery, View CPU real-time utilization status FTP, TFTP, Xmodem, SFTP file upload and download management Console/ AUX Modem/ Telnet/ SSH2.0 CLI command line configuration
System	Web browser: Mozilla Firefox 2.5 or higher, Google Chrome V42 or higher, Cat5 and above Ethernet cable TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, Mac OS X) installed on each computer in the network

Dimensions

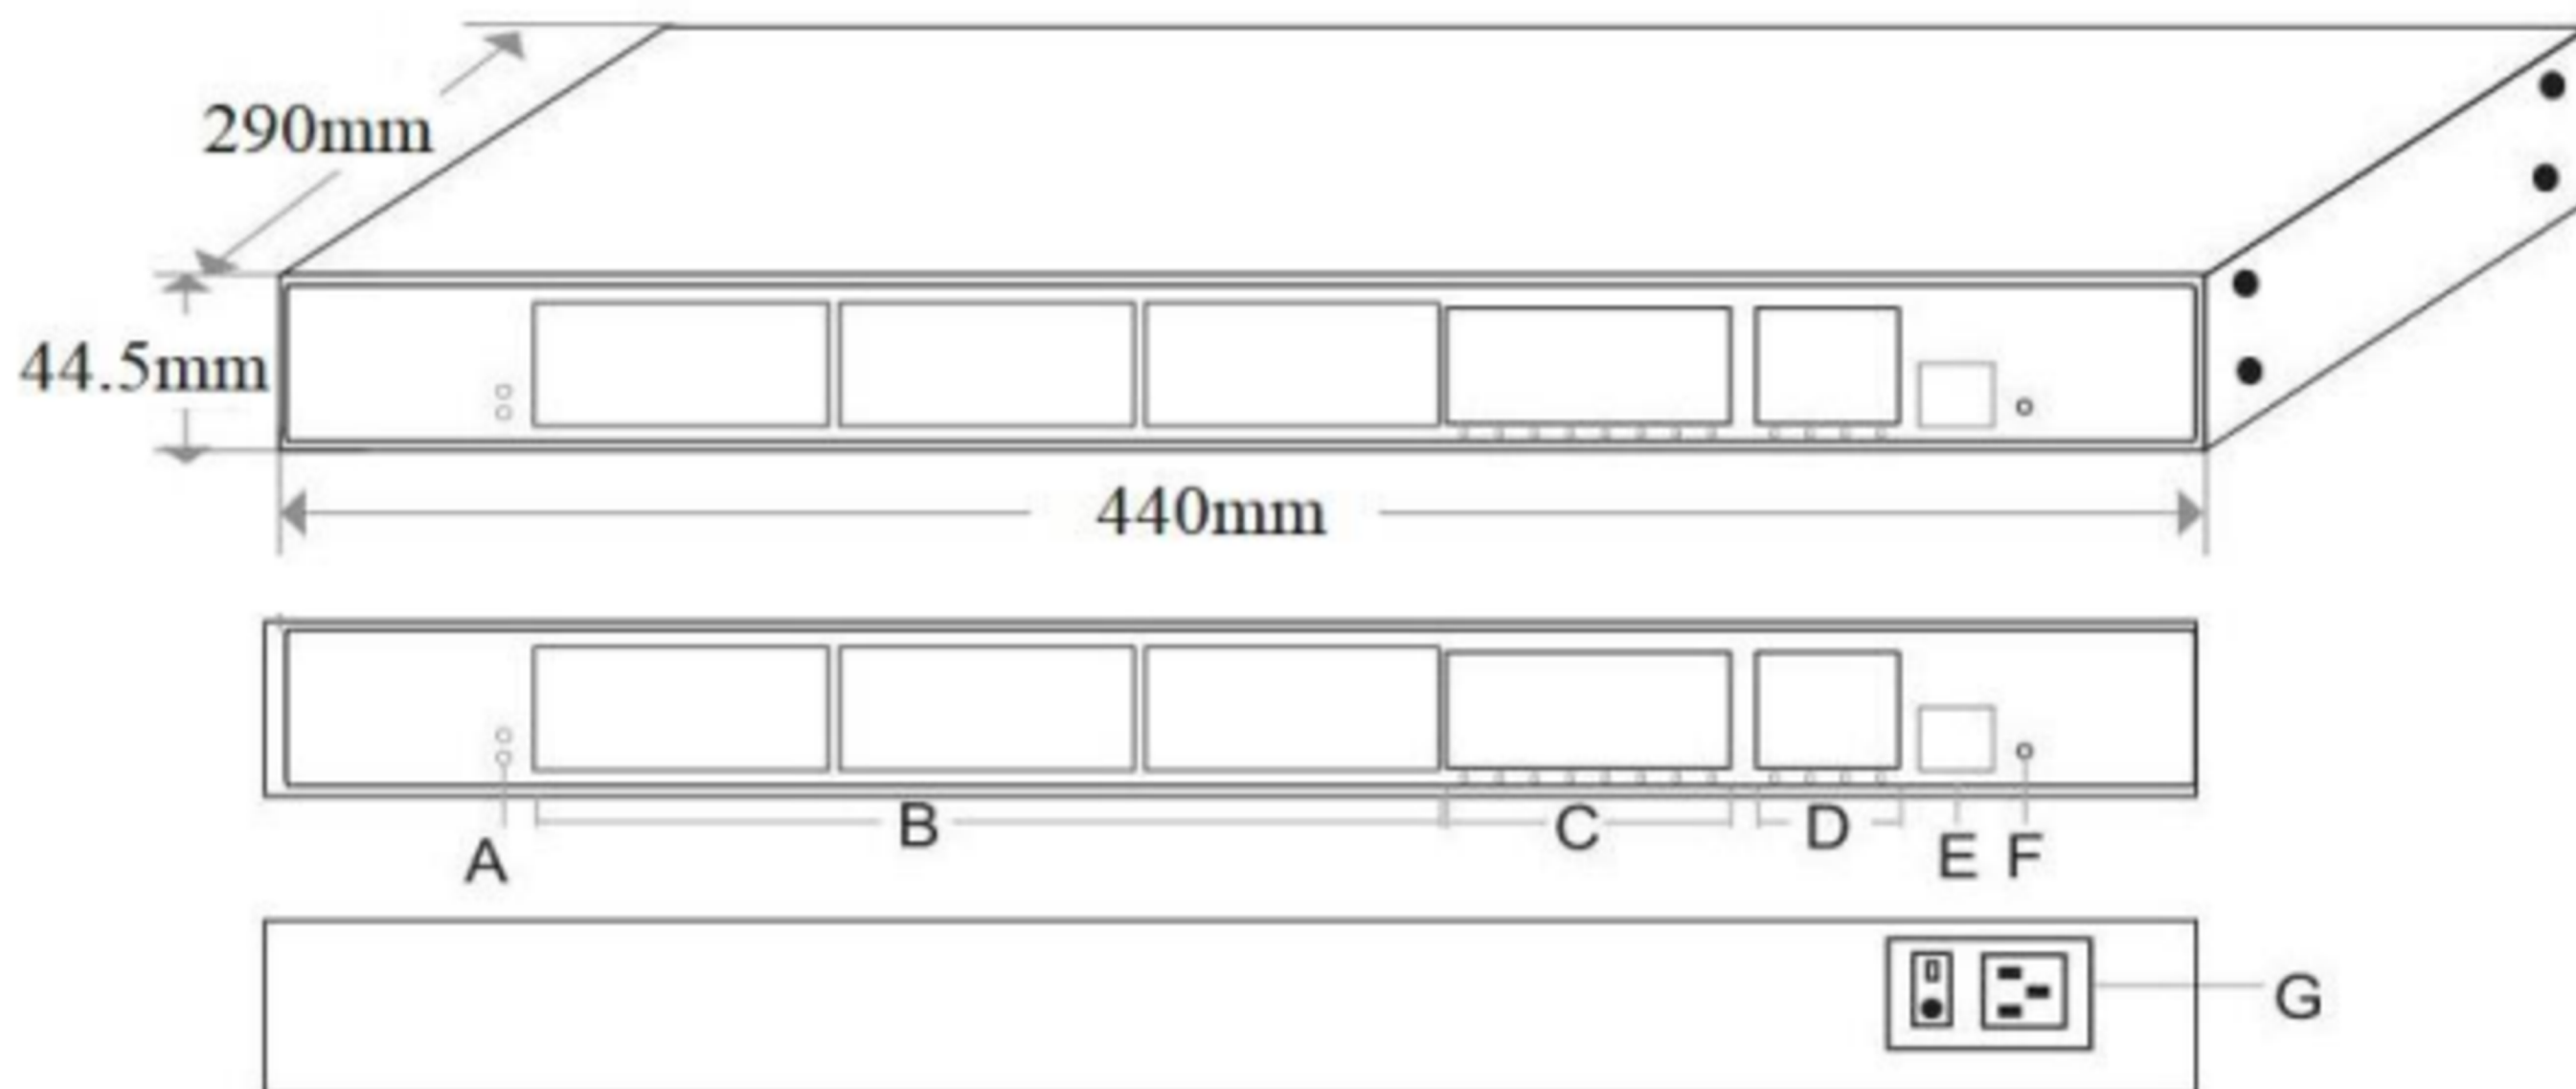

- | | |
|------------------------------------|---|
| A. Working indicator | E. Console port |
| B. 24*10/100/1000M PoE ports | F. Reset switch |
| C. 8*100/1000M SFP fiber ports | G. Power input port AC100-240V, 50-60Hz |
| D. 4*1/10G uplink SFP+ fiber ports | |

Applications

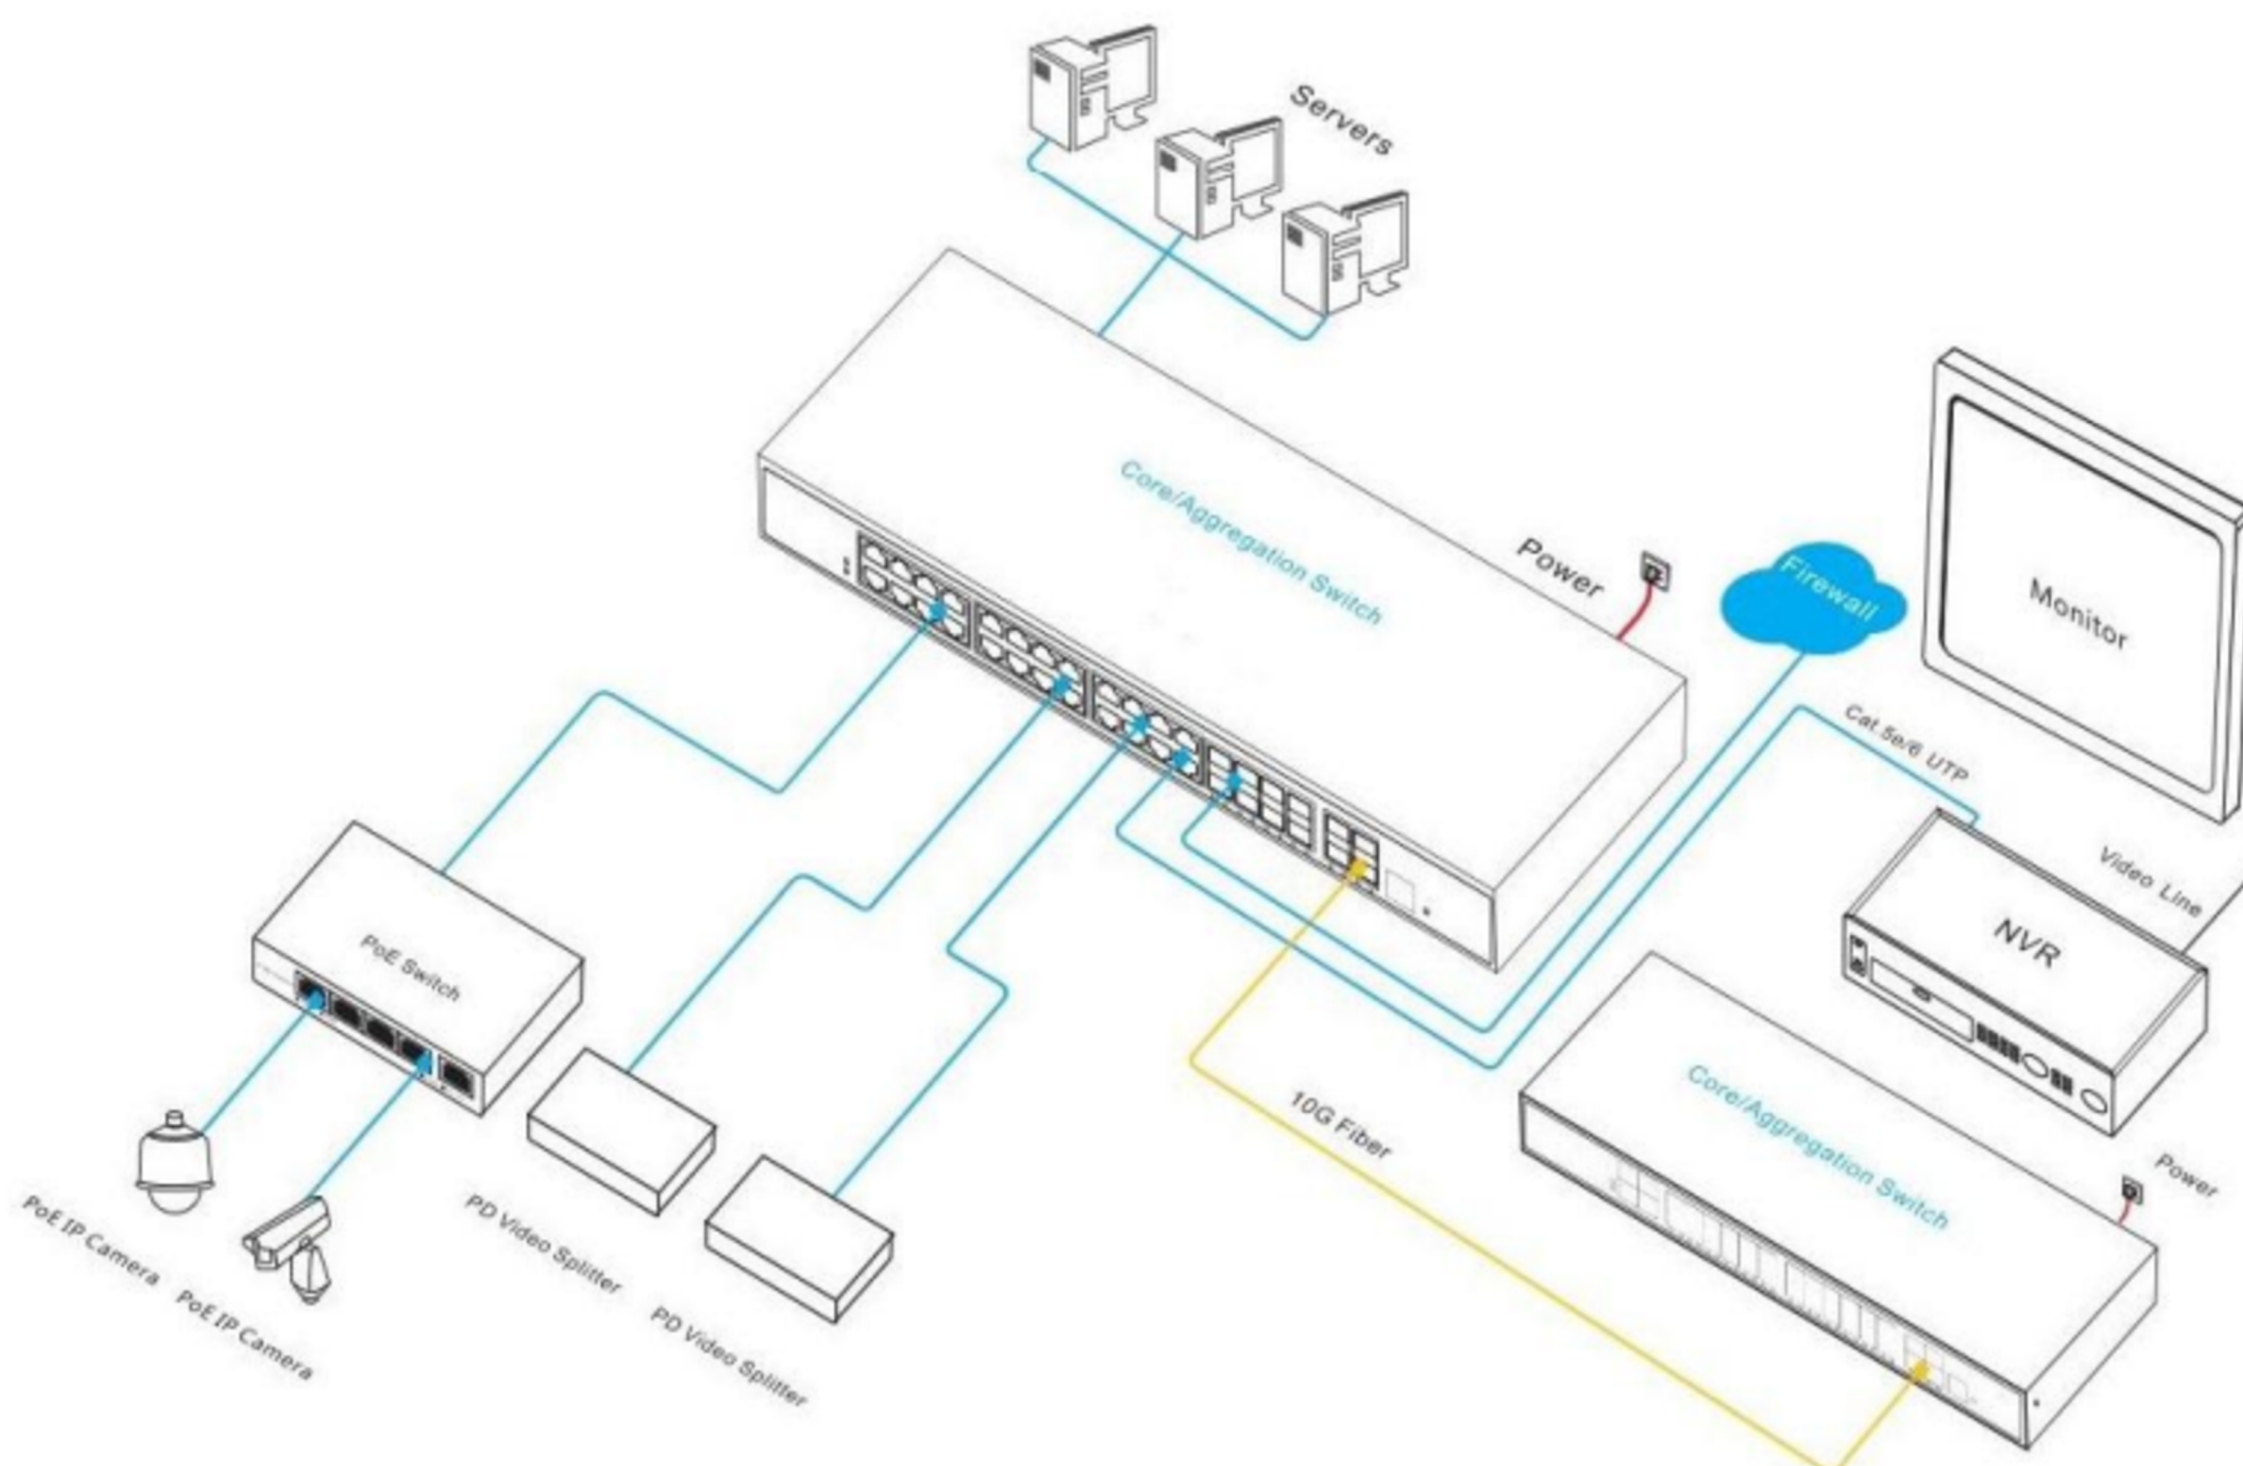

Ordering Information

Model	Description	Built-in Power Supply
NAV-P-24P8S-4S	L3 managed PoE switch with 2410/100/1000M RJ45 ports and 8100/1000M SFP fiber ports and 4*1/10G uplink SFP+ fiber ports. Port 1-24 can support IEEE 802.3 af/at PoE standard. Built-in power supply and 1U/19” cabinet installation.	400W
NAV-P-24P8S-4S-at	L3 managed PoE switch with 2410/100/1000M RJ45 ports and 8100/1000M SFP fiber ports and 4*1/10G uplink SFP+ fiber ports. Port 1-24 can support IEEE 802.3 af/at PoE standard. Built-in power supply and 1U/19” cabinet installation.	600W
Note: The optical module is not included and needs to be purchased separately.		

Packing List

Content	Qty	Unit
36-port 10G uplink L3 managed PoE fiber switch	1	SET
AC Power Cable	1	PC
RJ45-DB9 Line	1	PC
Mounting Kits	1	SET
User Guide	1	PC
Warranty Card	1	PC

Optical Module

Product	Model	Description	Unit
1.25G Optical Module	2630	SFP optical module, 1.25G multi-mode dual fiber 850nm, transmission distance: 550m, LC interface. supports DDM function and hot plugging.	PC
	2632	SFP optical module, 1.25G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
	2612-T	SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
	2613-R	SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC

	2612-T-SC	SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, SC interface. supports DDM function and hot plugging.	PC
	2613-R-SC	SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, SC interface. supports DDM function and hot plugging.	PC
Power Module	2633	1.25G SFP optical module transfers to 10/100/1000M RJ45 port.	PC
10G Optical Module	6630	SFP+ optical module, 10G multi-mode dual fiber 850nm, transmission distance: 300m, LC interface. supports DDM function and hot plugging.	PC
	7832	SFP+ optical module, 10G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
	7832-33	SFP+ optical module, 10G single-mode single fiber TX1330nm/ RX1270nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
	7832-27	SFP+ optical module, 10G single-mode single fiber TX1270nm/ RX13300nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC