



52-Port 10G Uplink L3 Managed PoE Switch (NAV-P48P4S)

High-Performance L3 Managed Core Switching

The NAV-P48P4S is a next-generation Layer 3 managed PoE fiber switch independently developed for high-density networks. It features 48x Gigabit RJ45 ports and 4x 10G SFP+ uplink fiber ports, making it the ideal core aggregation solution for demanding environments.




Smart PoE Power Supply

Supports IEEE 802.3af/at standards with a massive 600W total power budget. Automatically detects and powers compliant devices like APs and IP cameras.



10G Uplink Capacity

Equipped with 4x 1/10G SFP+ fiber ports to support high-bandwidth uplinks and long-distance transmission, ensuring non-blocking wire-speed forwarding.

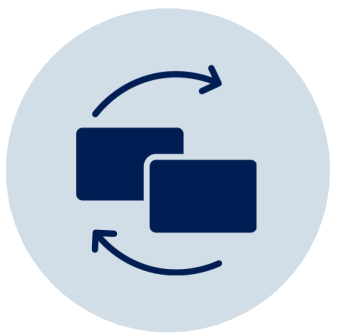

Robust L3 Management

Features comprehensive Layer 3 management including IPv4/IPv6 dual-stack, dynamic routing, and redundant ring network protocols (ERPS) for <50ms recovery.

Switching Capacity

176 Gbps

Non-blocking High Speed


Forwarding Rate

131 Mpps

Fast Packet Processing

Designed for versatility and reliability, this switch is perfect for hotels, campuses, parks, and medium-sized enterprises. It supports rich security features like port isolation and ACL policies, ensuring a secure and easy-to-manage network infrastructure.

52-Port 10G Uplink L3 Managed PoE Switch (NAV-P48P4S)

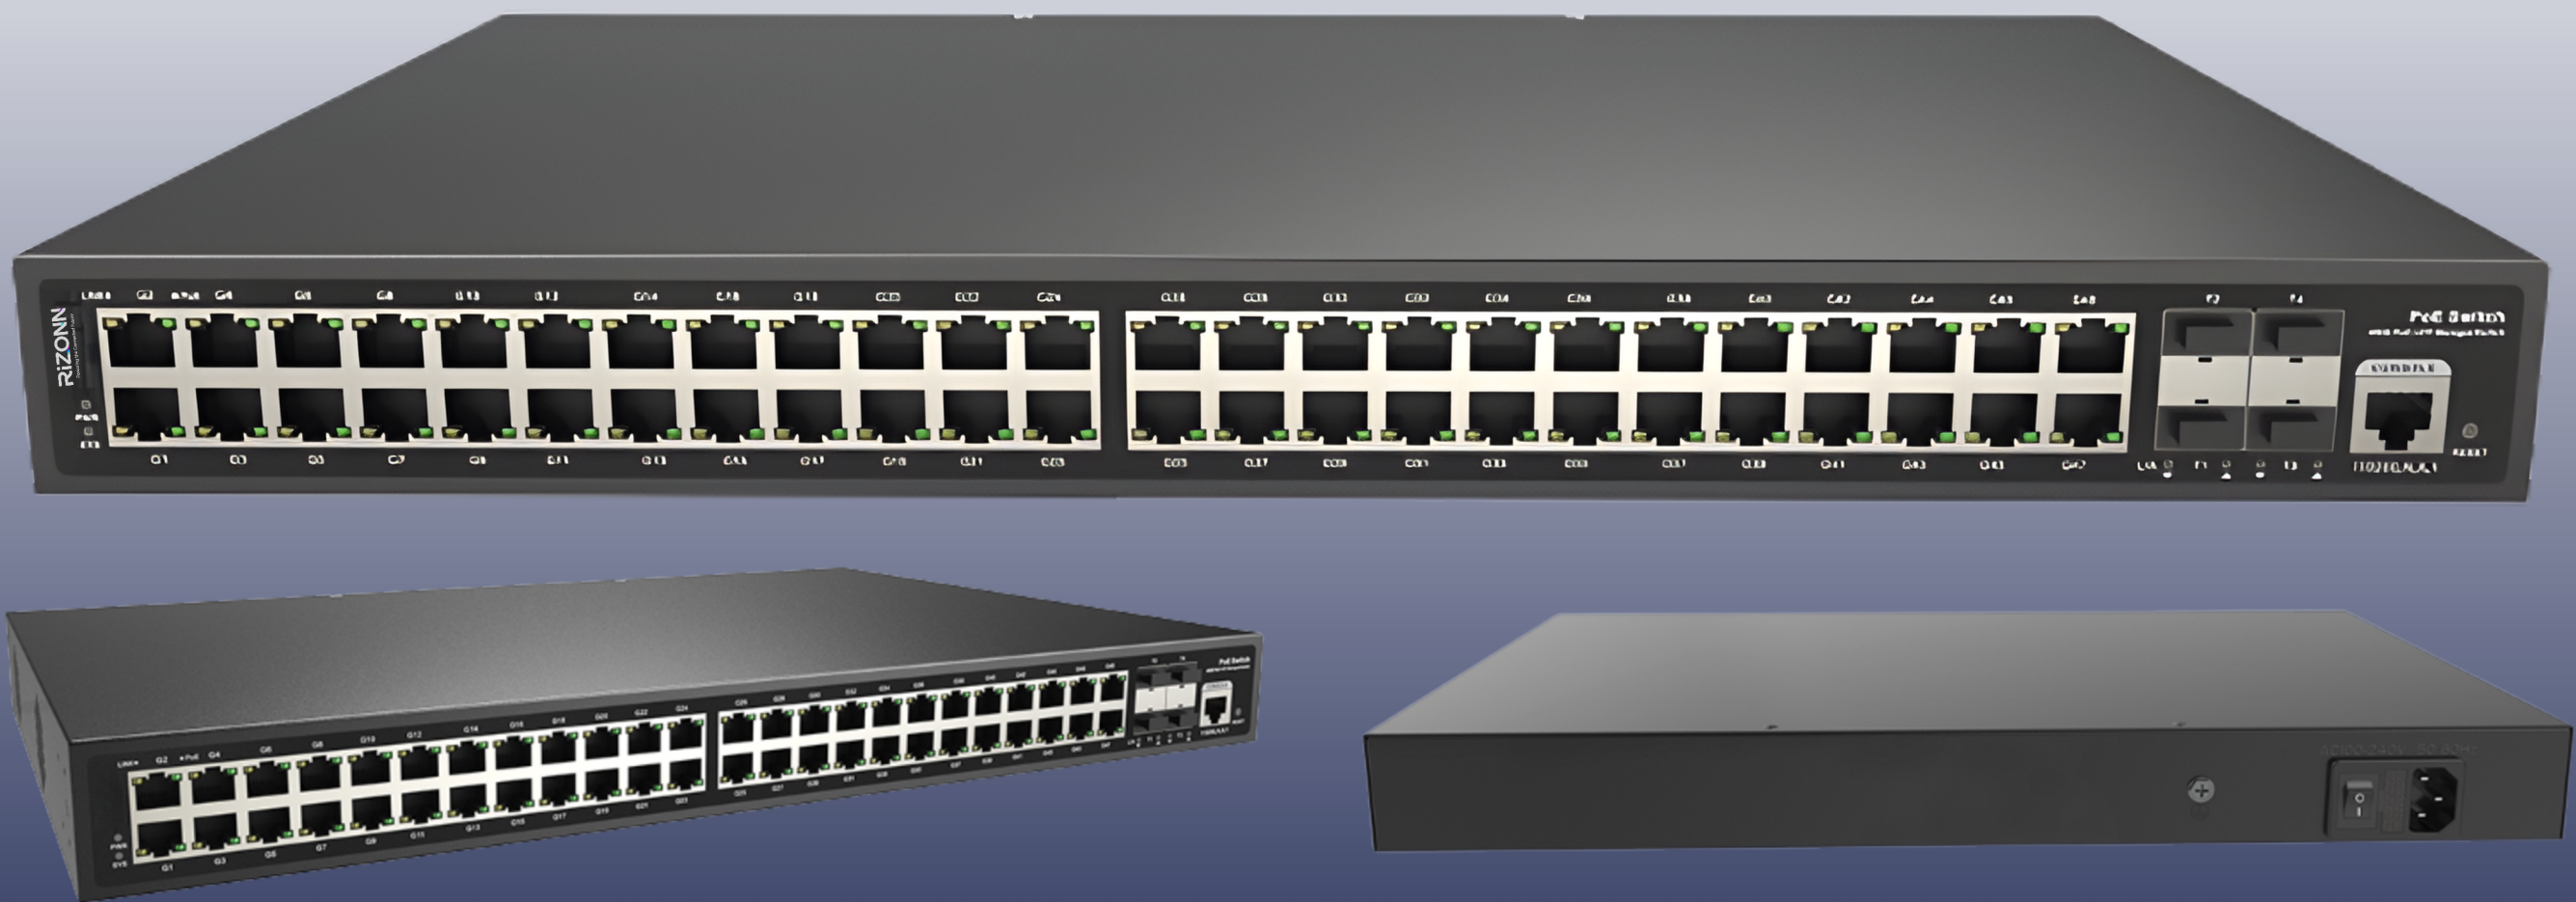

Product Overview

The **NAV-P48P4S** is a high-performance Layer 3 (L3) managed PoE fiber switch, independently developed to meet the demands of high-density network environments.

It features 48x 10/100/1000Base-T adaptive RJ45 ports and 4x 1/10G uplink SFP+ fiber ports. Ports 1–48 support the IEEE 802.3af/at PoE standard, delivering up to 30W of power per port. As a dedicated power supply device, it automatically detects and provides power to compliant equipment via Ethernet cables, eliminating the need for extra wiring.

This switch is ideal for powering wireless access points (APs), IP cameras, VoIP phones, and video intercom systems. It is the perfect solution for hotels, campuses, parks, supermarkets, factories, and small-to-medium enterprises (SMBs) seeking to establish a cost-effective, reliable, and high-speed network.

Key Features

10G Uplink Capacity

- 48× Gigabit RJ45 PoE ports + 4× 1/10G SFP+ uplinks for flexible networking.
- Supports non-blocking wire-speed forwarding and IEEE 802.3x full-duplex.

Comprehensive Security

- Features port isolation, storm control, and IP+MAC+Port+VLAN binding.
- Includes 802.1X authentication and flexible ACL policies for secure access.

L3 Management & Redundancy

- IPv4/IPv6 L3 routing with ERPS ring protection (<50ms recovery).
- STP/RSTP/MSTP redundancy, Link Aggregation, and IGMP Snooping.
- Rich VLAN support (Voice/QinQ) and QoS with SP/WRR scheduling.

Stable Hardware Design

- CCC, CE, FCC, RoHS certified with a galvanized steel metal shell.
- Active fan cooling and high-redundancy power supply for stability.
- Smart PoE priority prevents overloading during high power usage.

Easy O&M Management

- Real-time CPU/memory monitoring, Ping detection, and cable diagnostics.
- Secure management via HTTPS, SSH V1/V2, SSL, and SNMP V1/V2/V3.
- LLDP and RMON support for efficient network optimization.


High-Density L3 Powerhouse is a managed switch with 48 Gigabit PoE ports and 4× 10G SFP+ uplinks. It offers 600W power, advanced security, and ring network redundancy, suitable for high-density campus and enterprise settings.

Technical Specification

Feature	Description
Model	NAV-P48P4S
Interface Characteristics	
Fixed Port	48x 10/100/1000Base-T PoE ports (Data/Power) 4x 1/10G uplink SFP+ fiber ports (Data) 1x Console RS232 port (115200, N, 8, 1)
Ethernet Port	Port 1-48 supports 10/100/1000Base-T auto-sensing, full/half duplex MDI/MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3, 4, 5 UTP (≤100 meters) 100BASE-TX: Cat5 or later UTP (≤100 meters) 1000BASE-T: Cat5e or later UTP (≤100 meters)
Optical Fiber Port	1/10G SFP+ optical fiber port, default no optical module included (optional single-mode/multi-mode, single fiber/dual fiber optical module. LC)
Optical Port Expansion	Turbo overclocking 2.5G optical module expansion and ring network
Optical Cable/Distance	Multi-mode: 850nm/0-500m, 850nm/0-300m (10G) Single-mode: 1310nm/0-40km, 1550nm/0-120km
Chip Parameter	
Network Management Type	L3
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T, IEEE802.3u 100Base-TX, IEEE802.3ab 1000Base-T, IEEE802.3z 1000Base-X, IEEE802.3ae 10GBase-SR/LR, IEEE802.3x
Forwarding Mode	Store and Forward (Full Wire Speed)
Switching Capacity	176Gbps (non-blocking)
Forwarding Rate	131Mpps (@64byte)
CPU	500MHz
DRAM	4G
FLASH	256M
MAC	32K
Buffer Memory	32M
Jumbo Frame	9.6K
LED Indicator	System: SYS (Green), Network: Link (Yellow), PoE: PoE (Green), Fiber port: L/A (Green) 19
Reset Switch	Yes, press and hold the switch for 10 seconds and release it to restore the factory settings
PoE & Power Supply	
PoE Port	Port 1-48
PoE Management	PoE power supply total power limit configuration, Power delay start, PoE work and time scheduling, Port PoE working status display, Port PoE output priority configuration, Port PoE output power distribution, PoE on/off, af/at power distribution
Power Supply Pin	1/2(+) 3/6 (-)
Max Power Per Port	30W, IEEE 802.3 af/at
Total PWR/Input Voltage	600W / (AC100-240V)
Power Consumption	Standby < 30W, Full Load < 600W
Power Supply	Built-in power supply, AC100-240V 50-60Hz, 6.6A

Physical Parameter	
Operation TEMP / Humidity	-20~+55°C; 5%~90% RH Non-condensing
Storage TEMP / Humidity	-40~+80°C; 5%~95% RH Non-condensing
Dimension (L*W*H)	440*290*44.5mm
Net/Gross Weight	4.8 kg / 5.7 kg
Installation	Desktop, 1U/19" cabinet
Certification & Warranty	
Lightning Protection	Lightning protection: 4KV 8/20us, Protection level: IP30
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS
Warranty	3 years, lifelong maintenance
Network Management	
Interface Features	IEEE802.3x flow control (Full-duplex), Port temperature protection setting, No connection port automatic sleep, Port green Ethernet Energy-saving setting, Broadcast storm control based on port speed, SFP+ optical port DDMI real-time digital diagnosis
L3 Routing	IPv4/IPv6 static route/default route (up to 128 entries), IPv4 dynamic routing (RIPv1/v2, OSPFv2, BGP4+), IPv6 dynamic routing (OSPFv3, BGP+, RIPng), VRRP, L3 routing and forwarding between different network segments/VLANs
VLAN	Voice VLAN, QinQ configuration, IEEE802.1q, VLAN based on MAC/Protocol, 4K VLAN based on port, Access/Trunk/Hybrid configuration
Port Aggregation	LACP dynamic aggregation, static aggregation. Max 26 aggregation groups and 8 ports per group
Spanning Tree	STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)
Ring Network Protocol	G.8032 (ERPS), Recovery time less than 20ms. 250 Ring at most, Max 250 devices per ring
Multicast	MLD Snooping, Multicast VLAN, Fast log out, IGMP Snooping v1/v2/v3, Max 1024 multicast groups
Port Mirroring	Bidirectional data mirroring based on port
QoS	Diff-Serv QoS, Priority Mark/Remark, Queue Scheduling Algorithm (SP, WRR, SP+WRR), Flow-based Rate Limiting, Flow-based Packet Filtering, 8 Output queues per port, 802.1p/DSCP priority mapping
ACL	L2 to L4 packet filtering, matching first 80 bytes message. Provide ACL based on MAC, Destination MAC, IP Source, Destination IP, IP Protocol, TCP/UDP Port, VLAN, etc.
Security	Port isolation, Host data backup, Anti-DoS attack, ARP intrusion detection, Quadruple binding (IP+MAC+VLAN+port), IP source address protection, MAC address black hole, User hierarchical management, SSH 2.0, IEEE802.1X authentication, Limit MAC address learning
DHCP	DHCP Client, DHCP Snooping, DHCP Server, DHCP Relay
Management	System work log, Link Layer Discovery Protocol (LLDP), NTP clock, Cable length detection, SNMP V1/V2/V3, Ping detection, Web network management (HTTPS), NMS platform cluster management (LLDP+SNMP), One click recovery, CPU real-time utilization status, FTP/TFTP/SFTP file management
System	Console/AUX Modem/Telnet/SSH2.0 CLI configuration; Web browser support (Mozilla Firefox 2.5+, Google Chrome V42+); TCP/IP, network adapter, and network OS (Windows, Linux, Mac OS X) installed on each computer

Dimensions

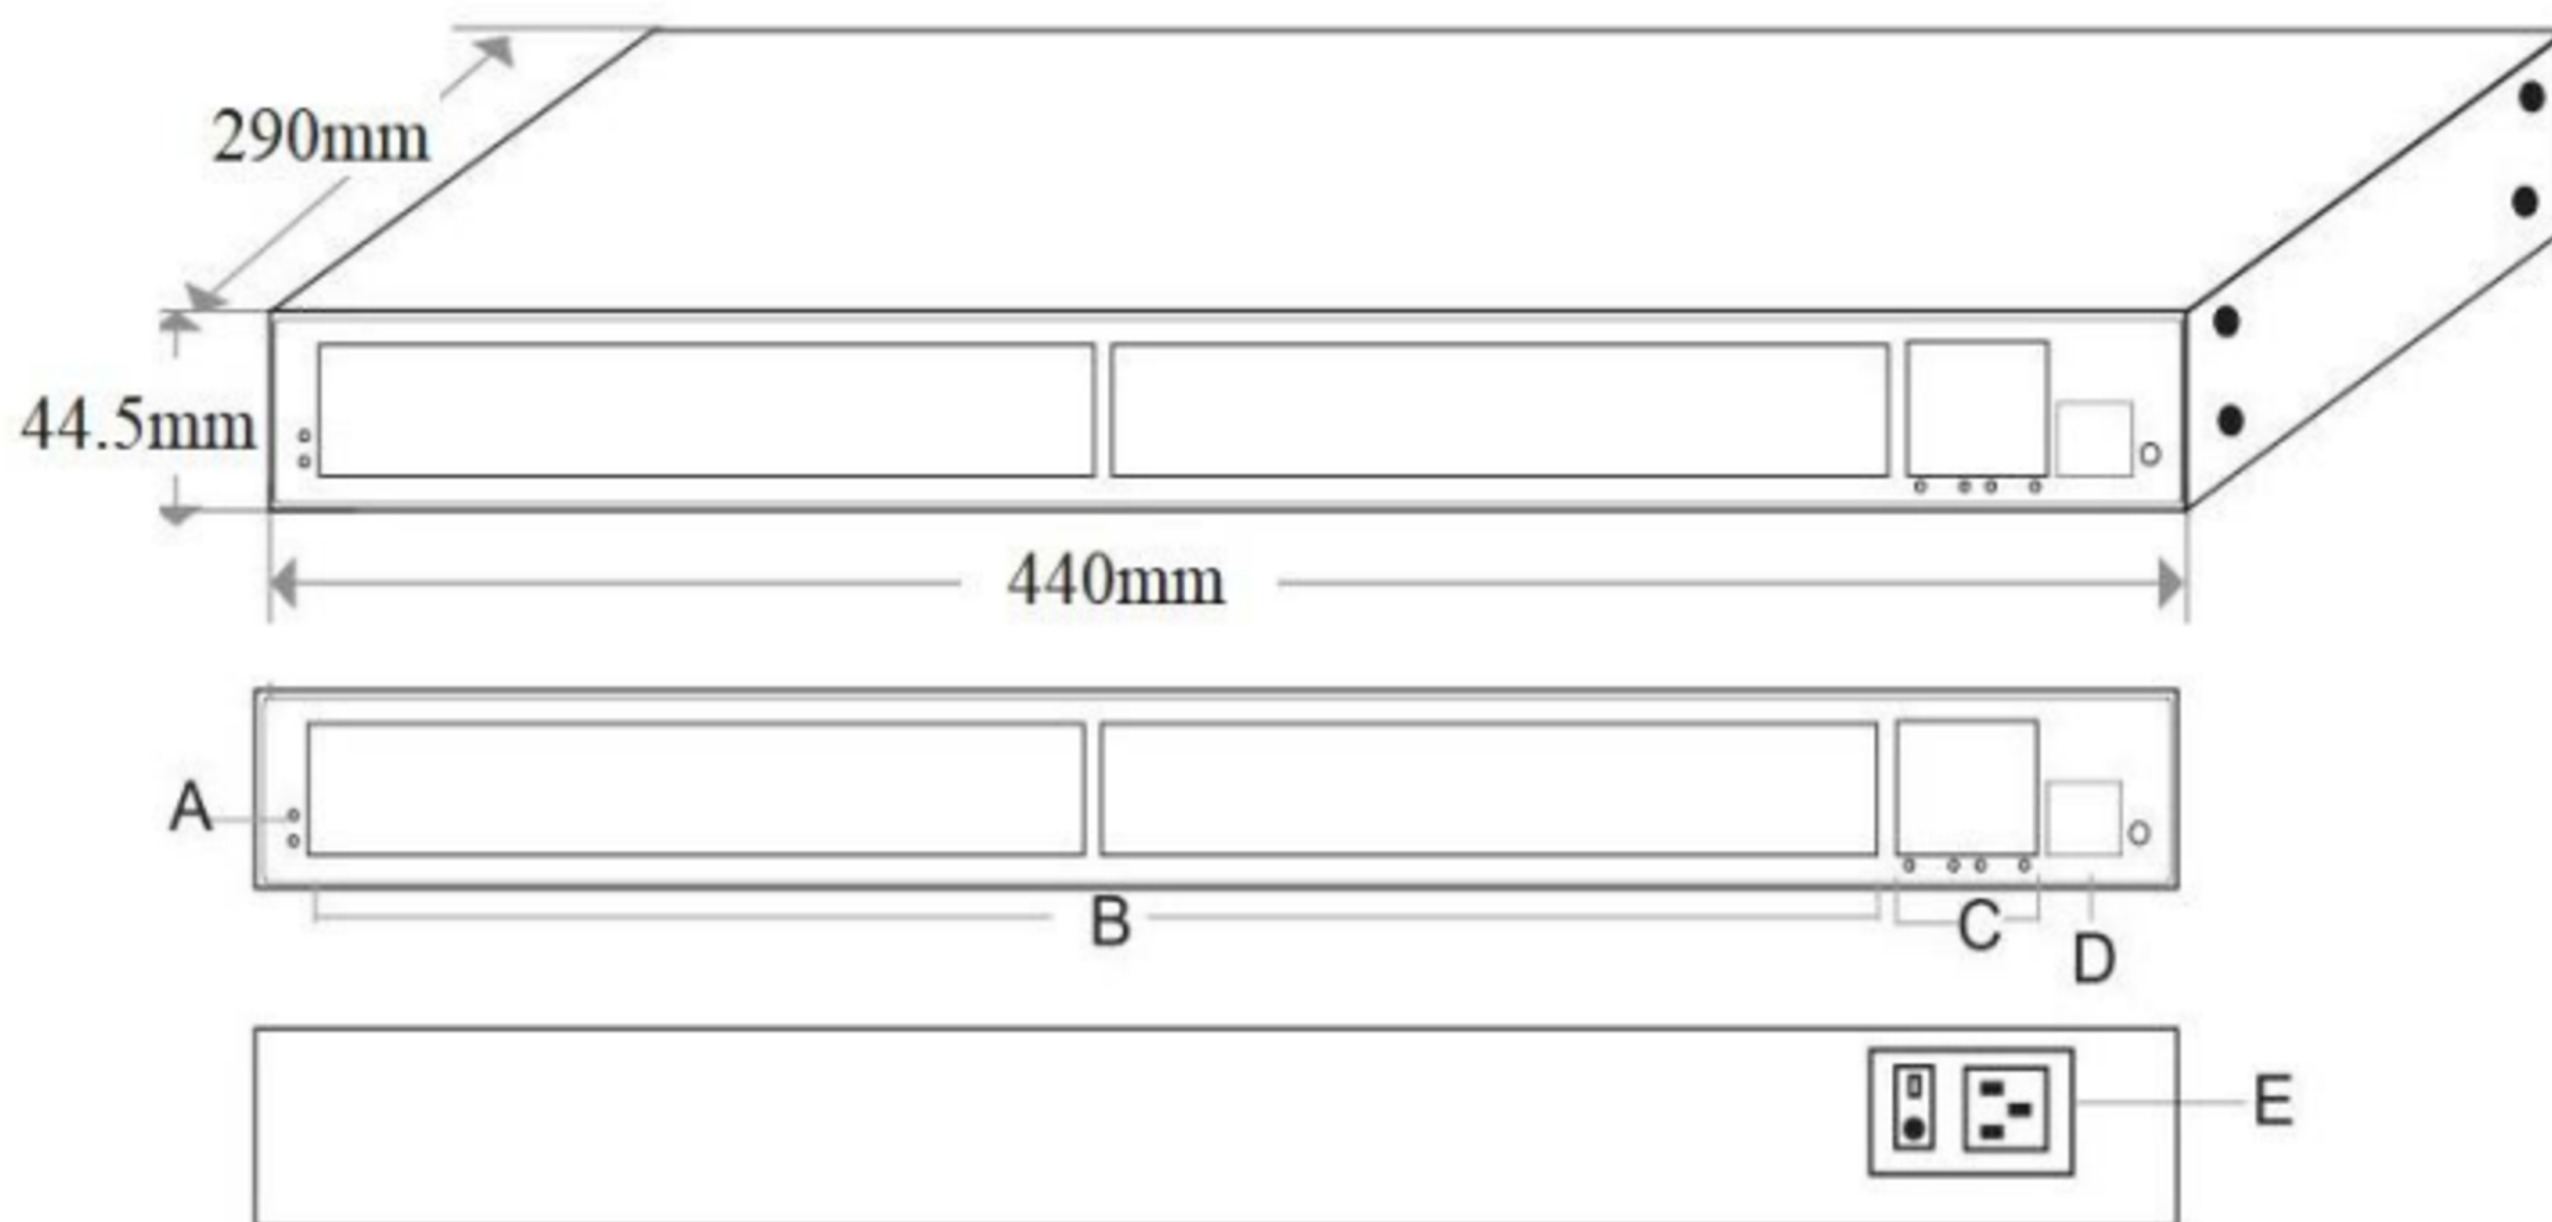

A. Working indicator


B. 48*10/100/1000M RJ45 ports

C. 4*1/10G uplink SFP+ fiber ports

D. Console port

E. Power input port AC100-240V, 50/ 60Hz

Applications

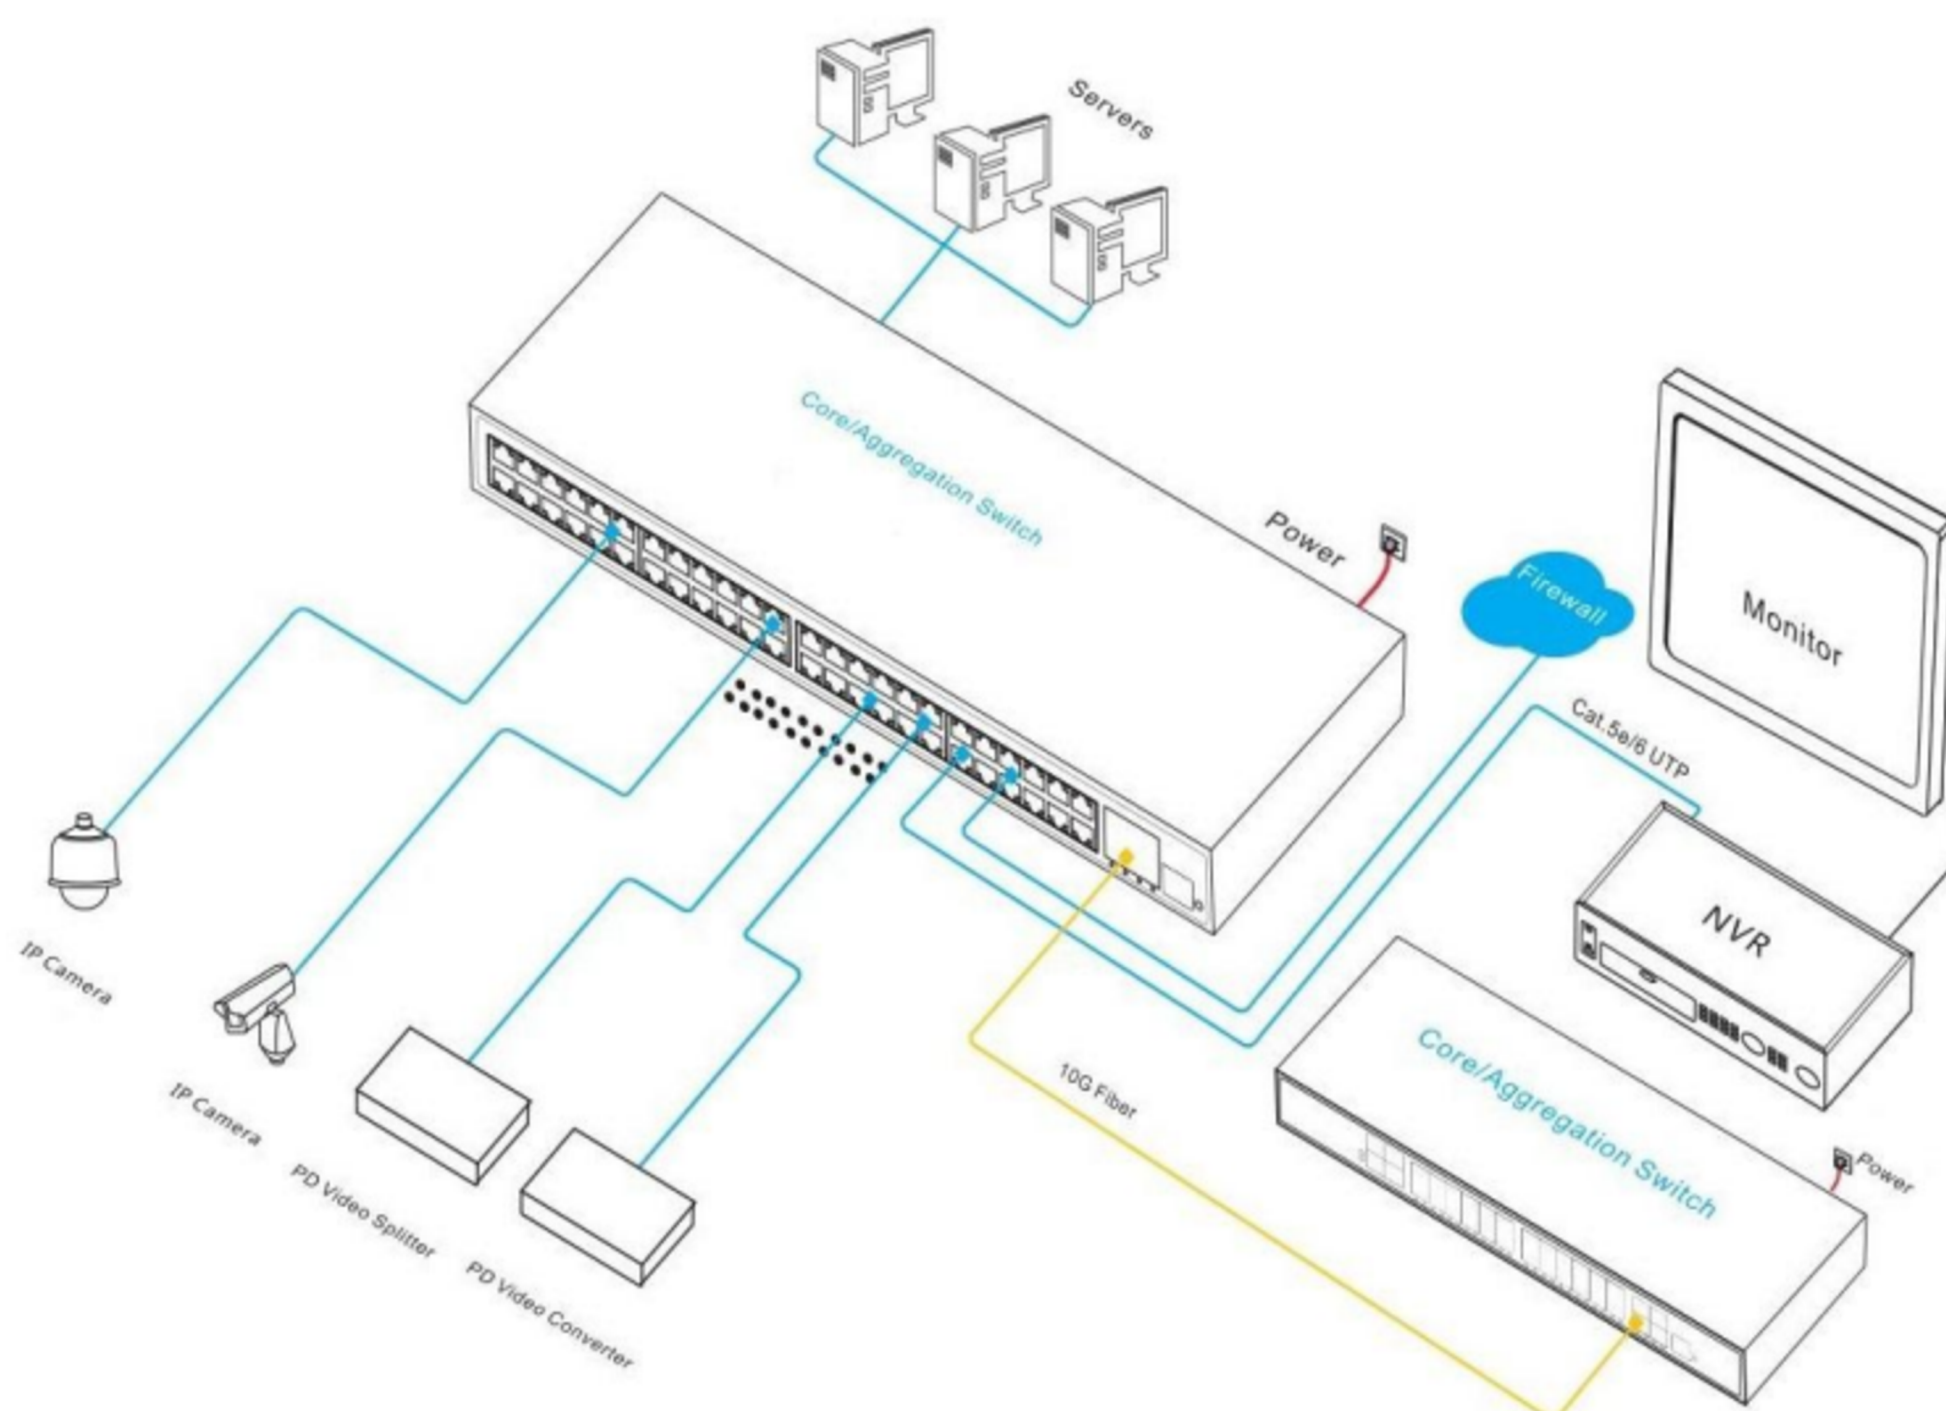

Ordering Information

Model	Description	Built-in Power
NAV-P48P4S	L3 managed PoE switch with 48x 10/100/1000M RJ45 ports and 4x 1/10G uplink SFP+ fiber ports. Ports 1-48 support IEEE 802.3af/at PoE. Built-in power supply. 1U/19-inch cabinet installation.	600W
The optical module is not included and needs to be purchased separately.		

Packing List

Content	Qty	Unit
NAV-P48P4S (52-port 10G uplink L3 managed PoE switch)	1	SET
AC Power Cable	1	PC
RJ45-DB9 Line	1	PC
Mounting Kit (Hanging Ear)	1	SET
User Guide	1	PC
Warranty Card	1	PC

Optical Module

Product	Model	Description	Unit
1.25G Optical Module	2630	SFP optical module, 1.25G multi-mode dual fiber 850nm, transmission distance: 550m, LC interface. supports DDM function and hot plugging.	PC
	2632	SFP optical module, 1.25G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
	2612-T	SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
	2613-R	SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC

	2612-T-SC	SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, SC interface. supports DDM function and hot plugging.	PC
	2613-R-SC	SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, SC interface. supports DDM function and hot plugging.	PC
Power Module	2633	1.25G SFP optical module transfers to 10/100/1000M RJ45 port.	PC
10G Optical Module	6630	SFP+ optical module, 10G multi-mode dual fiber 850nm, transmission distance: 300m, LC interface. supports DDM function and hot plugging.	PC
	7832	SFP+ optical module, 10G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
	7832-33	SFP+ optical module, 10G single-mode single fiber TX1330nm/ RX1270nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
	7832-27	SFP+ optical module, 10G single-mode single fiber TX1270nm/ RX13300nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC