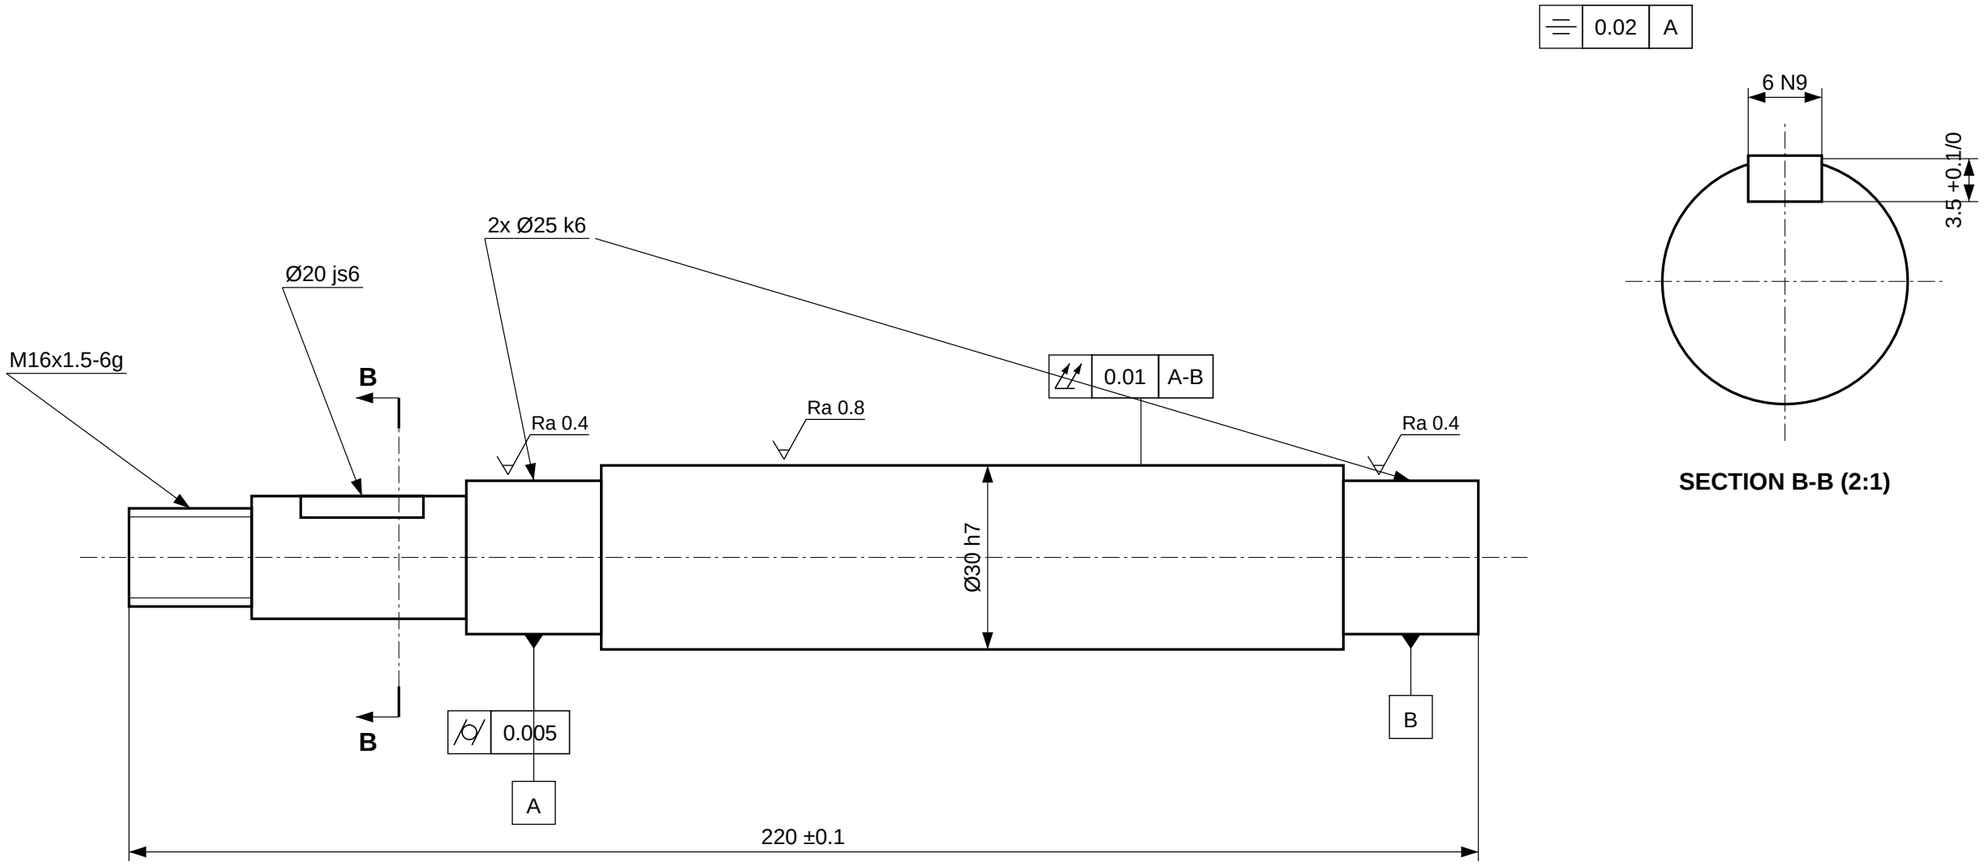

NOTES:

1. Induction hardened 50-55 HRC, depth 1-1.5 mm on Ø25 seats.
2. Centre holes ISO 6411-A2/4.25 permitted.
3. Chamfer all edges 0.5x45°.

TITLE **DRIVE SHAFT**		DRAWING NO. **TDR-1002**	
MATERIAL **42CrMo4+QT (1.7225) EN 10083-3**		REV **A**	SHEET **1/1**
GENERAL TOLERANCES **ISO 2768-fH**	SURFACE Ra 1.6	SCALE **1:1**	WEIGHT **0.92 kg**
TREATMENT **Induction hardened 50-55 HRC, depth 1-1.5 mm on Ø25 seats**		PROJECTION ISO 5456-2	
COMPANY **Example Engineering B.V.**	STANDARD **ISO 128**	UNITS **mm**	PART NO. **TDR-1002-00**