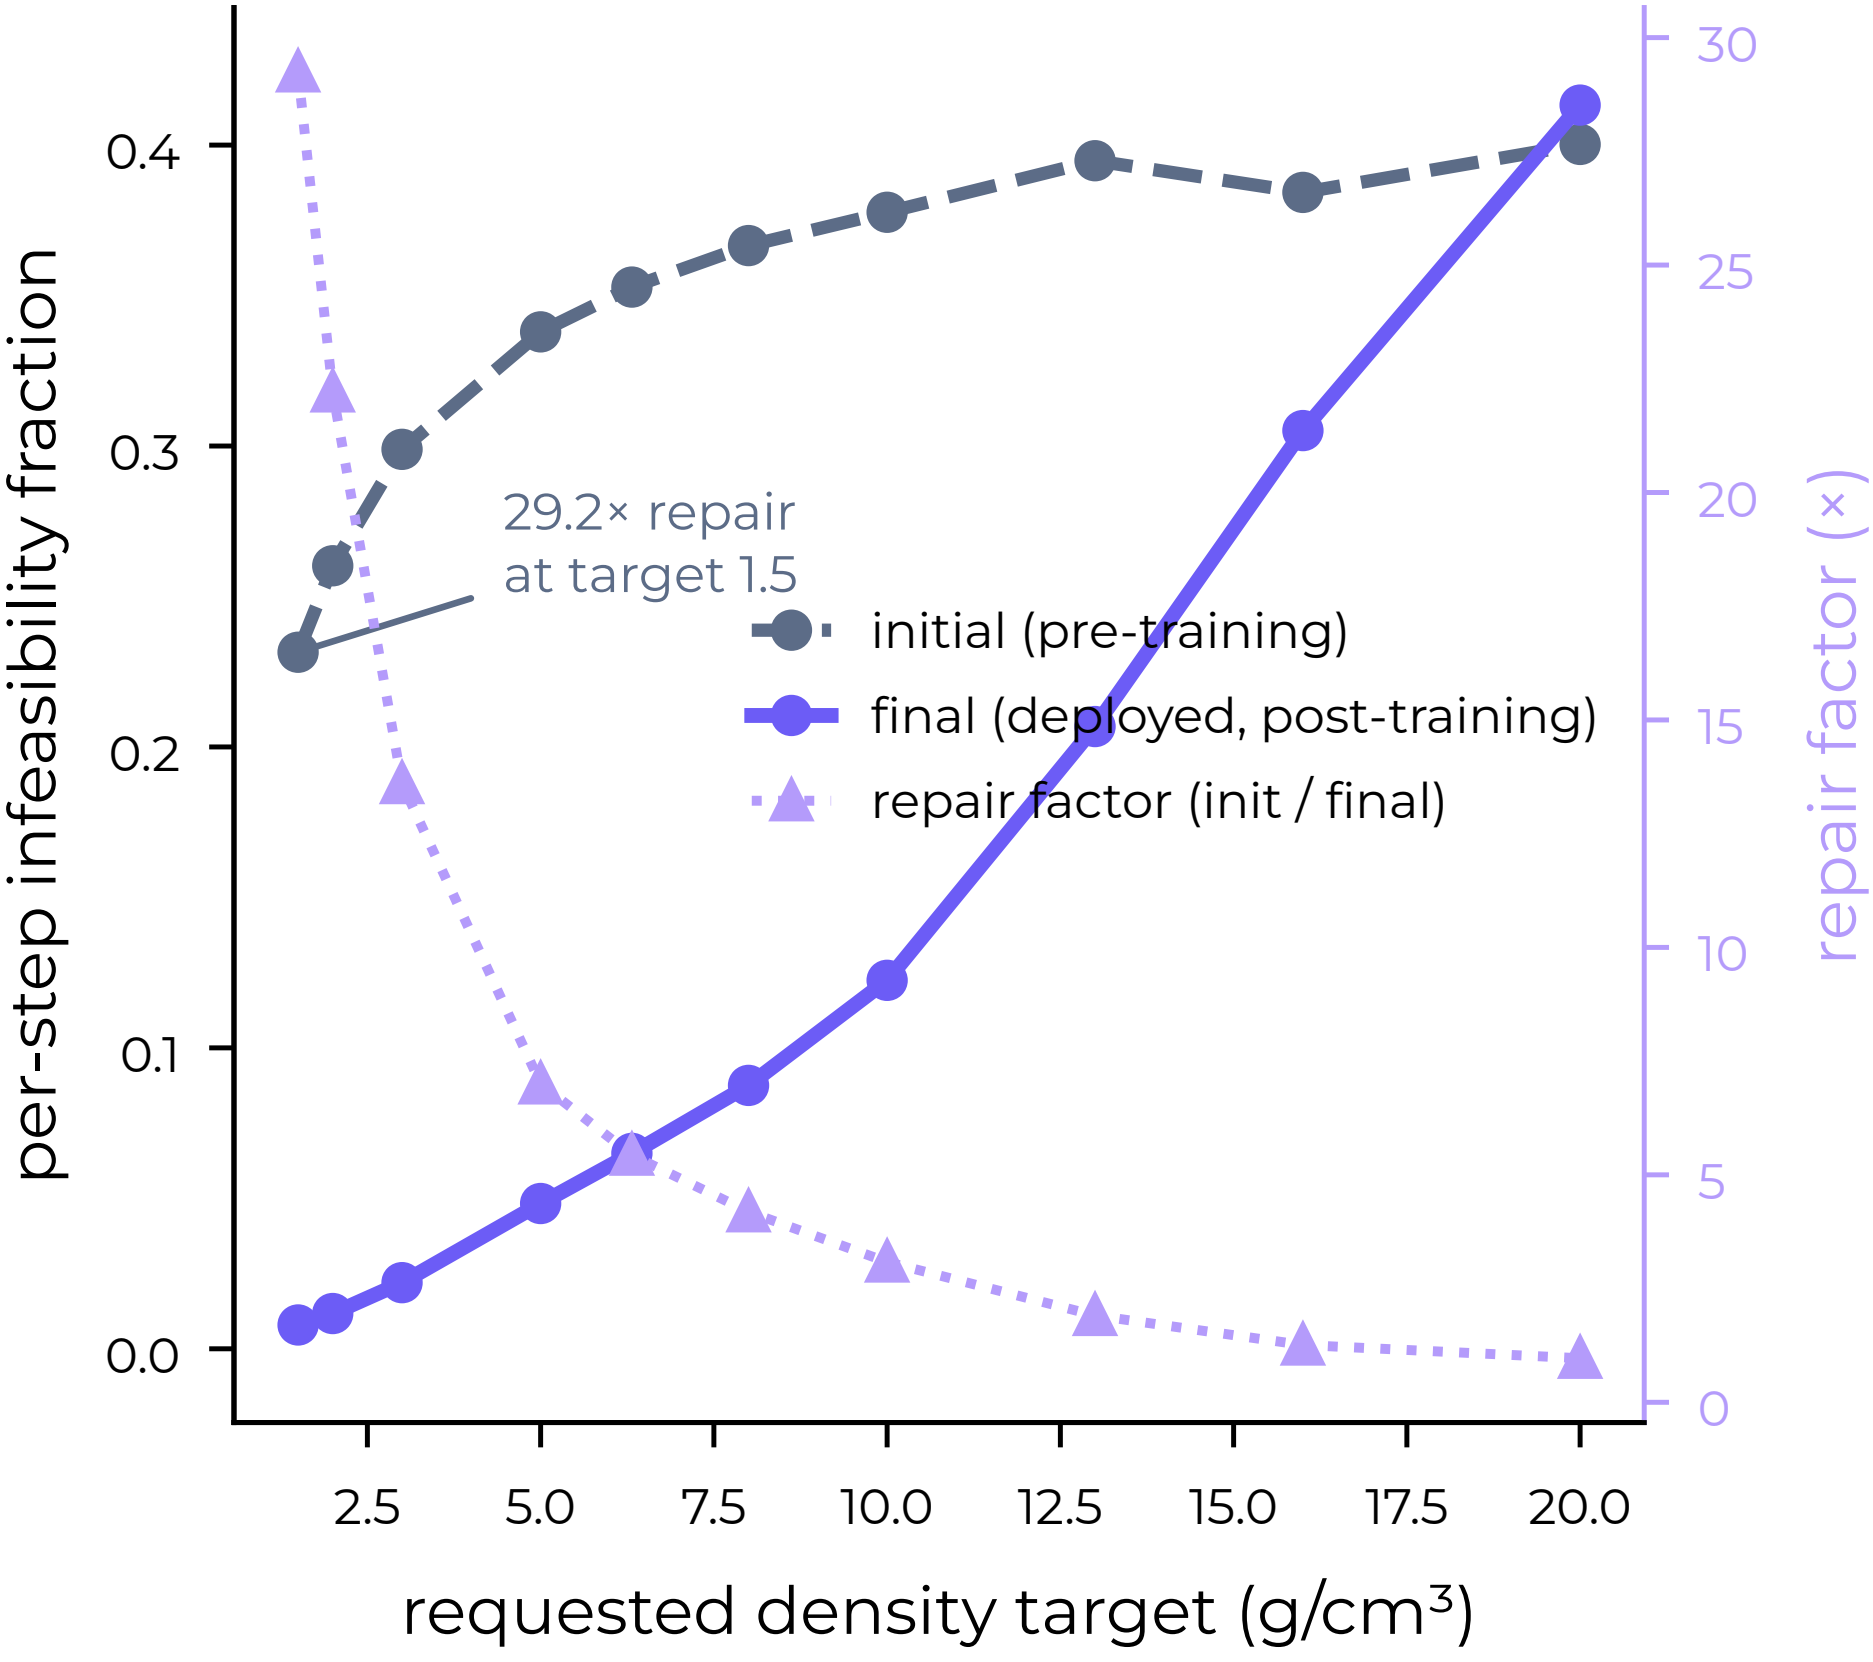
per-step infeasibility fraction
0.0
0.1
0.2
0.3
0.4
repair factor (×)
0
5
10
15
20
25
30
2.5
5.0
7.5
10.0
12.5
15.0
17.5
20.0
requested density target (g/cm³)
29.2× repair
at target 1.5
initial (pre-training)
final (deployed, post-training)
repair factor (init / final)