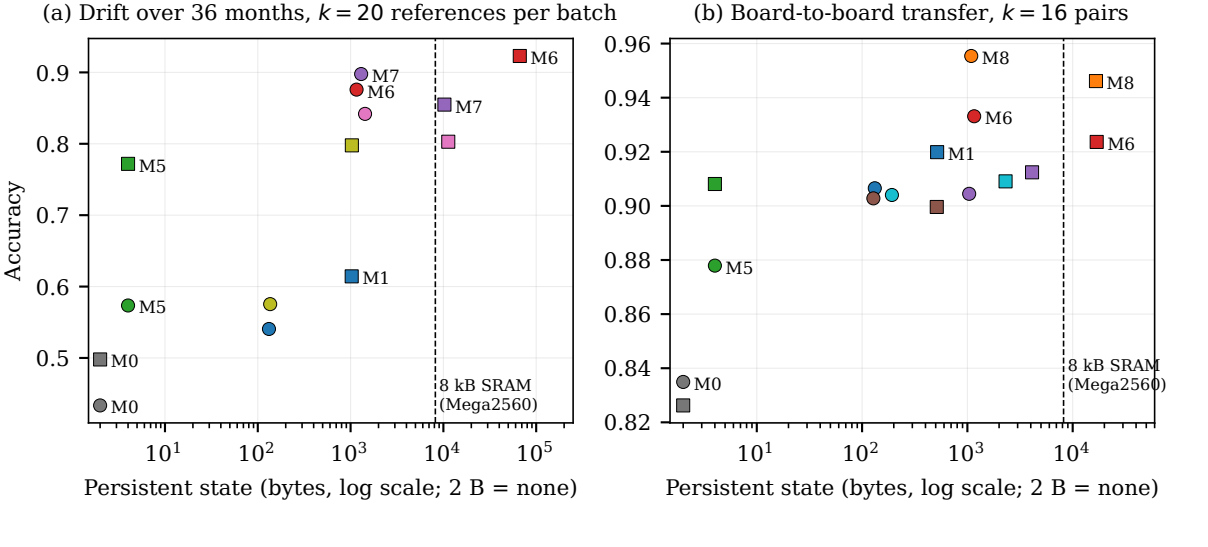
(a) Drift over 36 months, $k = 20$ references per batch
(b) Board-to-board transfer, $k = 16$ pairs
Accuracy
Persistent state (bytes, log scale; 2 B = none)
8 kB SRAM
(Mega2560)
M0
M1
M5
M6
M7
M8
M0 Static head
M1 EWMA standardisation
M4 Per-feature affine
M5 NLMS on head
M6 RLS on head
M7 Block OLS on head
M8 Direct standardisation
M9 Per-channel DS
M1+M5 EWMA + NLMS
M1+M7 EWMA + block OLS
compact features
full features