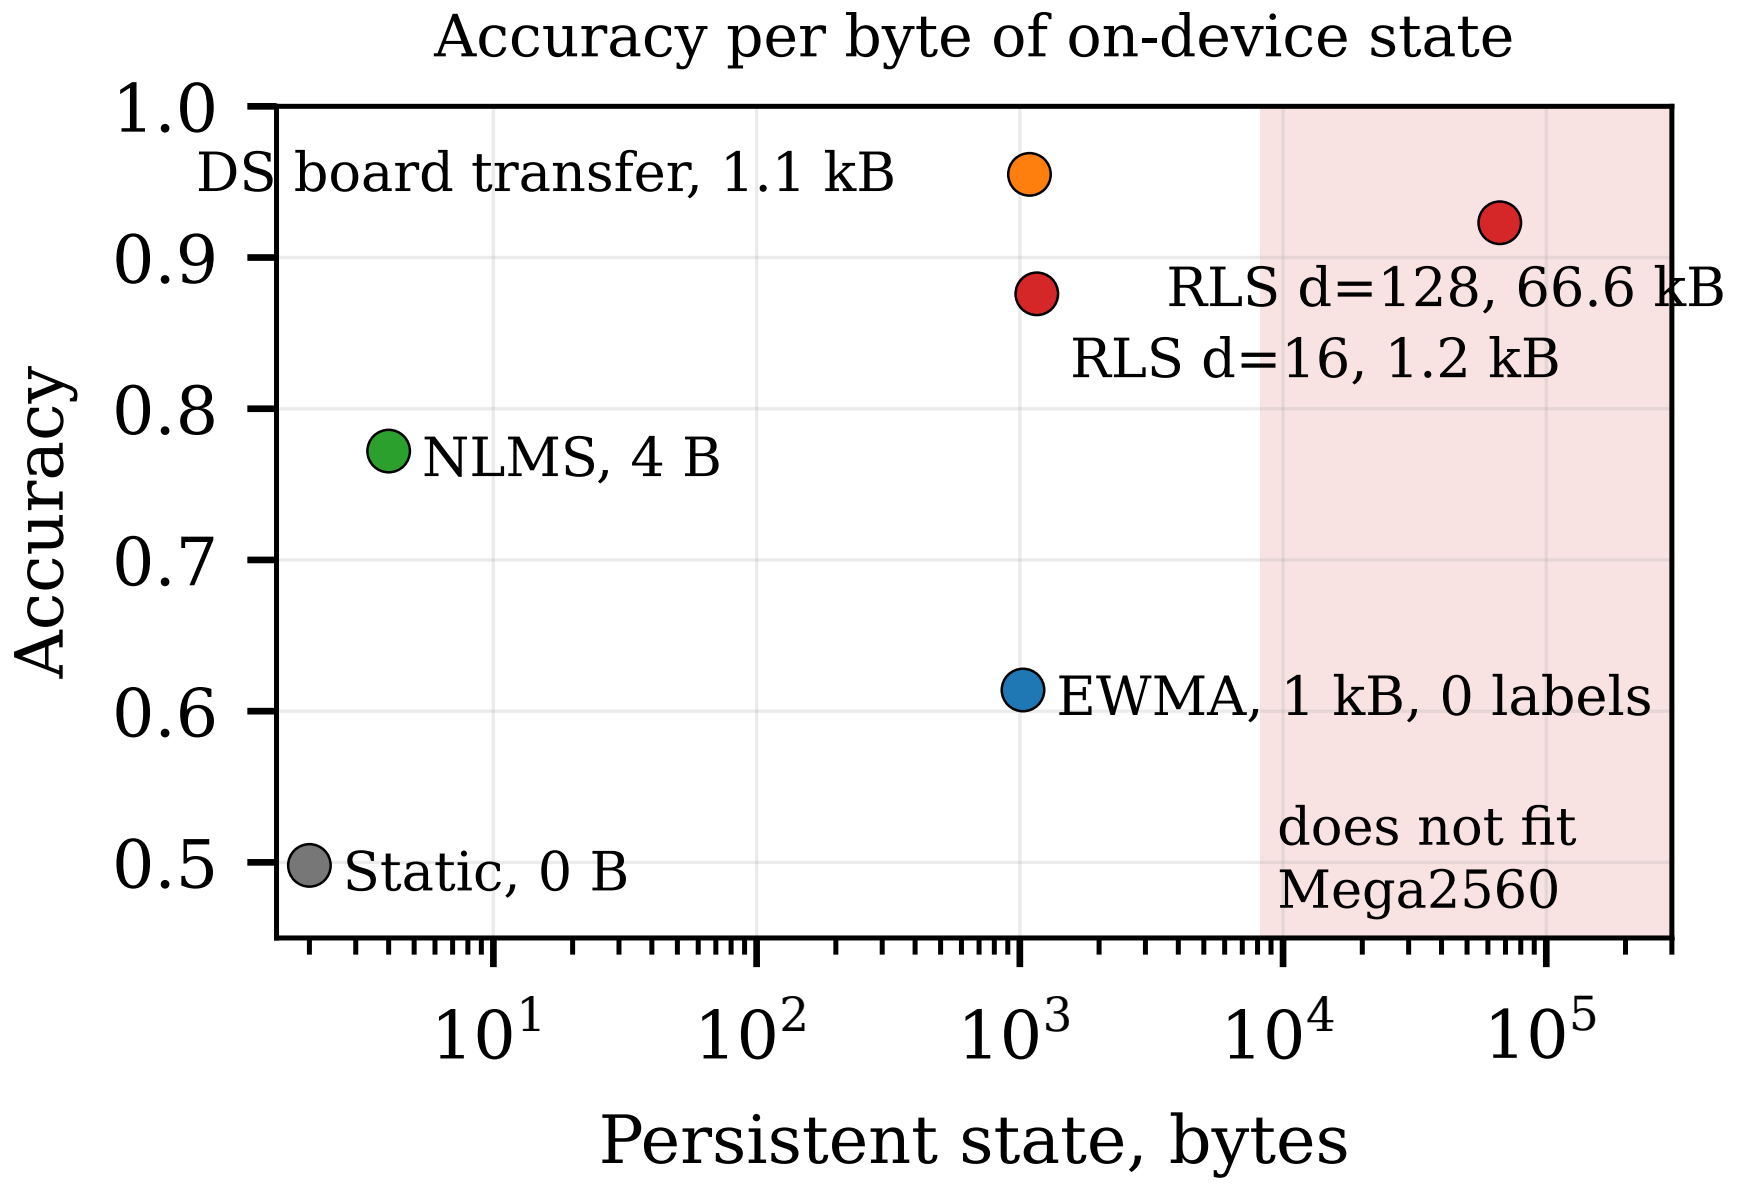
Accuracy per byte of on-device state
1.0
0.9
0.8
0.7
0.6
0.5
Accuracy
DS board transfer, 1.1 kB
RLS d=128, 66.6 kB
RLS d=16, 1.2 kB
NLMS, 4 B
EWMA, 1 kB, 0 labels
Static, 0 B
does not fit
Mega2560
10^1
10^2
10^3
10^4
10^5
Persistent state, bytes