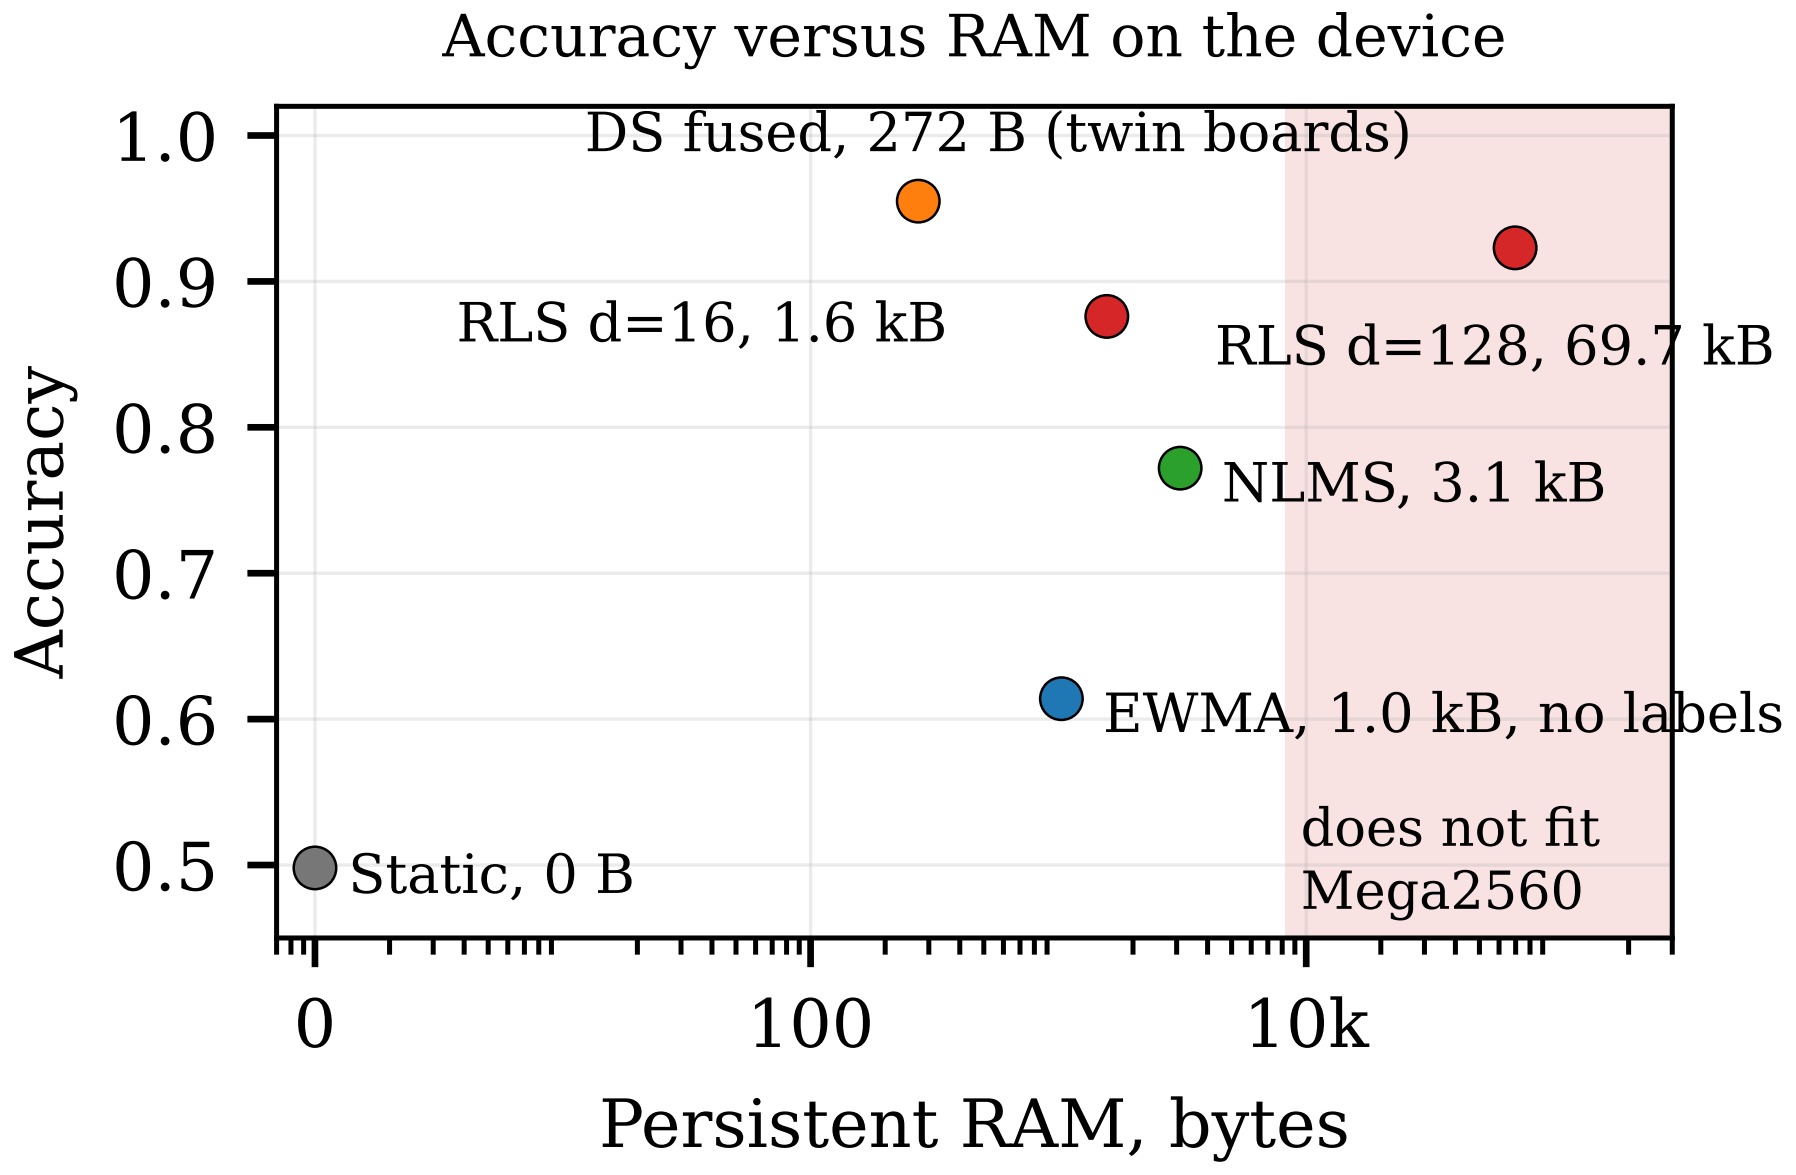
Accuracy versus RAM on the device
DS fused, 272 B (twin boards)
RLS d=16, 1.6 kB
RLS d=128, 69.7 kB
NLMS, 3.1 kB
EWMA, 1.0 kB, no labels
Static, 0 B
does not fit
Mega2560
1.0
0.9
0.8
0.7
0.6
0.5
Accuracy
0
100
10k
Persistent RAM, bytes