

INITIAL VEHICLE INFORMATION (IVI 2.0) USER MANUAL

VERSION HISTORY

Version	Date	Remarks
1.5	30-03-2026	Information added on usage of In Service information National/International
1.4	27-02-2026	More information on how to use Coupling information in eCoC file.
1.3	09-02-2026	Technical chapter on signature added.
1.2	05-02-2026	Embedded excelsheet "VehicleTypes-Power-Sound-Consumption" does not open in PDF. Document as excel added to the Manual documents.
1.1	03-02-2026	Error in enumeration list LocationMarkingsTable corrected.
1.0	18-01-2026	Initial version

CONTENT

Version history.....	2
Introduction.....	5
Signing an ecoc	6
Regulation Reference	6
Technical guidelines related to electronic signature	6
Summary and minimum requirements:	7
TypeApprovalIssueDate	8
Configuration of doors	8
Location StatutoryPlatesCode and Location VIN	8
WorkingPrincipleCode and EngineCycleCode	9
TechnicallyPermissibleMaximumStaticVerticalMassCouplingPoint	10
Regulation Reference	10
Usage information	10
Example XML	10
COUPLING DEVICES.....	10
Regulation Reference	10
Usage information	10
Example XML	11
Trailer masses vehicle category M and N.....	11
Regulation Reference	11
Example data CoC:	12
Example eCoC xml file	12
(Family) Identifiers.....	13
Regulation Reference	13
Example data CoC:	13
Usage information	13
Example eCoC xml file:.....	13
GeneralCodeEcolInnovation.....	14
Usage information	14
Example eCoC xml file:.....	14
PureElectricVehicleIndicator	14
Regulation Reference	14
Usage information	14
Indicator / OPTionalCode fields	15
Usage information	15
Multistage vehicles	15
Regulation Reference	15
How to enter stage information in de eCoC xml.....	16
Example eCoC xml file:.....	16
Processing the Data	17
Hybrid vehicles (NOVC-hev)	18
Regulation Reference	18
Usage information	18
Example eCoC xml file:.....	18
plugin Hybrid vehicles (OVC-hev)	18
Regulation Reference	18
Usage information	19
Example eCoC xml file:.....	19
pure electric vehicles (PEV)	19
Regulation Reference	19
Usage information	20

Example eCoC xml file:	20
Correction eCoc	21
Regulation Reference	21
Example eCoC xml file:	21
<i>Usage information</i>	21
EMission/Sound/Power and Consumption for different vehicle types	21
How to set up in IVI	21
Tyre information	22
Regulation References	22
how to setup in ivi	22
In Service information National/International	23
How to use in IVI 2.0	23

INTRODUCTION

This manual outlines the structure, logic, and regulatory context of the Initial Vehicle Information (IVI) version 2.0 as implemented in the electronic Certificate of Conformity (eCoC). It is intended for everybody involved in the creation, validation, and exchange of vehicle data in XML format.

It contains more detailed descriptions of the use of the eCoC and serves as a supplement to the IVI message book. Further documentation can be found on the eCoC website under menu item Documentation (<https://ecoc.eucaris.net>).

IVI 2.0 introduces a standardized schema for encoding vehicle-specific data in compliance with EU framework directives 2018/858, 168/2013 and 167/2013. The manual provides detailed instructions on how to use fields related to the technical data such as: masses, axles, tyres, energy sources, and multistage vehicle configurations. It also addresses mandatory digital signing requirements effective from July 5th 2026.

Information includes XML examples, regulatory references, and usage notes to support correct implementation and interoperability across systems. Special attention is given to cases such as hybrid configurations, optional indicators, energy sources, masses and multistage approvals.

This document serves as a technical reference to ensure data consistency, regulatory compliance, and robust integration with national registration systems.

SIGNING AN ECOC

With effect from: July 5th 2026: it's mandatory to digitally sign all eCoC files. This will not only apply for the framework directive 2018/858 but also for the 168/2013 and 167/2013.

REGULATION REFERENCE

Commission Implementing Regulation (EU) 2024/1061 of 10 April 2024 laying down rules for the application of Regulation (EU) 2018/858 of the European Parliament and of the Council as regards to the secure exchange of data of the certificate of conformity in electronic format and read-only access to the certificate of conformity, and amending Commission Implementing Regulation (EU) 2021/133.

Article 1

Requirements for secure data exchange

1. When exchanging data, manufacturers and national access points of the European Vehicle and Driving Licence Information System ('EUCARIS') shall use a secure local web link and Extensible Markup Language (XML) schema structure and principles.
2. Manufacturers and the national access points of EUCARIS shall use websites that are secured by means of a qualified certificate for website authentication meeting the requirements laid down in Annex IV to Regulation (EU) No 910/2014 of the European Parliament and of the Council ⁽¹⁾.
3. The exchange of messages between manufacturers and national access points of EUCARIS and within EUCARIS shall be secured using an electronic signature within the meaning of Regulation (EU) No 910/2014 and data encryption protocols.
4. The national access points of EUCARIS and the EUCARIS nominated body for operation shall provide for validation of the electronic signatures by verifying and confirming that the requirements provided for in Article 26 of Regulation (EU) No 910/2014 were met at the time of signing.
5. The national access points of EUCARIS shall provide for traceability of the messages exchanged through that system by logging information on that exchange and provide the means to view and search that information.

Regulation (EU) No 910/2014 (hereafter the eIDAS Regulation or eIDAS), on electronic identification and trust services for electronic transactions in the internal market, provides a regulatory environment for electronic identification of natural and legal persons and for trust services.

	Electronic <u>signature</u>	Electronic seal
Advanced <u>AdES</u>	Regulation (EU) 2018/858 exchange of data of the certificate of conformity data in electronic format Refers to: Article 26 of Regulation (EU) No. 910/2014	Allowed for usage for eCoC in anticipation of amendment of implementing act implementing regulation 2024/1061
	Natural person ✓ Uniquely linked to the signer ✓ Able to identify the signer ✓ Created using data that the signer can control with the creator of the seal with high confidence ✓ Linked to the signed data so that any changes can be detected ✓ Public key infrastructure (PKI)	Legal person ✓ Uniquely linked to the creator of the seal ✓ Capable of identifying the creator of the seal ✓ Created using electronic seal creation with a high level of confidence ✓ Linked to the signed data so that any changes can be detected ✓ Public key infrastructure (PKI)
Qualified <u>QES</u>	Natural person Same as AdES but additionally: ✓ Hardware device such as cryptographic USB token or a Hardware Security Module (HSM)	Legal person Same as AdES but additionally: ✓ Hardware device such as cryptographic USB token or a Hardware Security Module (HSM)

Please note that the eCoC file must be signed by:

- ✓ The manufacturer or
- ✓ the EU representative of the manufacturer

Both parties have to be compliant as stated in the whole vehicle type approval (WVTA).

TECHNICAL GUIDELINES RELATED TO ELECTRONIC SIGNATURE

See <http://www.w3.org/2000/09/xmldsig>):

- Canonicalization Algorithm
 - xml-exc-c14n <http://www.w3.org/2001/10/xml-exc-c14n#>
 - SignatureMethodAlgorithm
 - SHA-256 <http://www.w3.org/2001/04/xmldsig-more#rsa-sha256>
 - Transform Algorithm
 - <http://www.w3.org/2000/09/xmldsig#enveloped-signature>
 - DigestMethodAlgorithm
 - SHA-256 <http://www.w3.org/2001/04/xmlenc#sha256>
-

SUMMARY AND MINIMUM REQUIREMENTS:

As a result of discussions within Ereg Topic Groep XII on CoC Data exchange and several manufacturers the minimum requirements for the signing certificate used for signing the eCoC, are as mentioned below.

Manufacturers, in minimum, can use an **advanced electronic seal** to sign the eCoC messages which can be made with a **non-qualified certificate**. Article 36 of regulation 910/2014 states the requirements for such a seal.

Manufacturers **can** (but are not required to) apply a **qualified electronic seal** which can be made with a **qualified certificate**.

This seal must, at the latest, be applied as of July 5th 2026.

Having a valid code signing certificate issued by **qualified TSP** and applying xmldsig will suffice to meet these requirements for submission of IVI messages.

X-ADES can be applied, as best practice; however this is not mandatory.

TYPEAPPROVALISSUEDATE

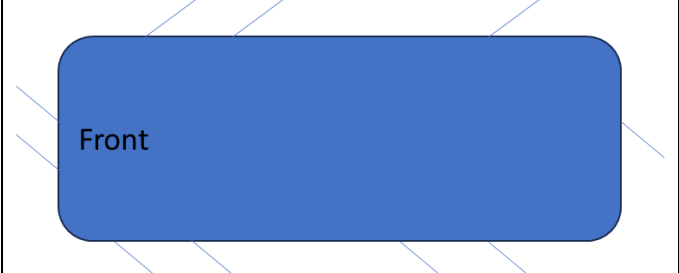
The TypeApprovalIssueDate will be used to indicate the issue date of the document. This date doesn't change in case of revisions or corrections. It only changes in case of extensions. First set at extension 00 and subsequently at extensions 01 etc.

CONFIGURATION OF DOORS

The ConfigurationOfDoors field has been replaced by a new definition.

ConfigurationOfDoorsGroup
NumberOfDoorsFront
NumberOfDoorsLeft
NumberOfDoorsRight
NumberOfDoorsBack

Example:

	NumberOfDoorsFront	2
	NumberOfDoorsLeft	4
	NumberOfDoorsRight	3
	NumberOfDoorsBack	1

Please note: as the attribute "Number of doors" is still part of the CoC this will also be in the IVI file as NumberOfDoors in the GeneralConstructionGroup.

LOCATION STATUTORYPLATESCODE AND LOCATION VIN

The fields for Item 0.6. have been replaced by a more detailed description of the location of the VIN and the statutory plates. The location can be indicated in the table below:

LocationMarkingsTable
LocationMarkingsGroup
LocationMarkingsSubject
LocationMarkingsVehiclePart
LocationMarkingsVehiclePartSide
LocationMarkingsVehiclePartSideSection
LocationMarkingsSubjectCode
VIN = LocationVIN
STAT = LocationStatutoryPlatesCode
LocationMarkingsVehiclePartCode
ENGCT = Engine compartment
PASCT = Passenger compartment
LUGCT = Luggage compartment
INSPL = Instrument panel
DRAWB = Drawbar
CHASS = Chassis
APILR = A-pillar
BPILR = B-pillar
CPILR = C-pillar
DPILR = D-pillar

LocationMarkingsVehiclePartSideCode

FRONTSIDE = Frontside

LEFTSIDE = Leftside

RIGHTSIDE = Rightside

BACKSIDE = Backside

LocationMarkingsVehiclePartSideSectionCode

LEFT = Left

MIDDLE = Middle

RIGHT = Right

FRONT = Front

BACK = Back

LocationStatutoryPlates23Wheel and LocationVin23Wheel will not be added to this table in accordance with the definition in the 168/2013. The new table can be used for 2018/858 and 167/2013.

WORKINGPRINCIPLECODE AND ENGINECYCLECODE

The working principle code have been changed to a combination of working principle and combustion cycle instead of repeating the engine cycle within the working principle.

WorkingPrincipleCode	CMPRA	Compressed air
WorkingPrincipleCode	EXTCI	External compression ignition
WorkingPrincipleCode	EXTPI	External positive ignition
WorkingPrincipleCode	INTCI	Internal compression ignition
WorkingPrincipleCode	INTPI	Internal positive ignition
WorkingPrincipleCode	TRBNE	Turbine
WorkingPrincipleCode	ELECT	Electric
and		
CombustionCycleCode	2ST	Two stroke cycle
CombustionCycleCode	4ST	Four stroke cycle
CombustionCycleCode	ROT	Rotary
CombustionCycleCode	OTH	Other

How to use:

WorkingPrincipleCode	WorkingPrincip		CombustionCycle
C2 compression ignition, two stroke	INTCI	internal compression ignition	2ST
C4 compression ignition, four stroke	INTCI	internal compression ignition	4ST
CA compressed air	CMPRA	compressed air	
CI compression ignition	INTCI	internal compression ignition	
DF dualfuel			
E2 positive ignition, two stroke	INTPI	internal positive ignition	2ST
E4 positive ignition, four stroke	INTPI	internal positive ignition	4ST
EC external combustion engine compression ignition	EXTCI	external compression ignition	
EE electric engine	ELECT	electricity	
EF external combustion engine			
EP external combustion engine positive ignition	EXTPI	external positive ignition	
ER positive ignition, rotary	INTPI	internal positive ignition	ROT
IC internal combustion engine compression ignition	INTCI	internal compression ignition	
IE internal combustion engine positive ignition	INTPI	internal positive ignition	
PI positive ignition	INTPI	internal positive ignition	
TB turbine	TRBNE	turbine	

REGULATION REFERENCE

Commission Implementing Regulation (EU) 2020/683 of 15 April 2020 implementing Regulation (EU) 2018/858.

USAGE INFORMATION

The location of the vertical maximum static mass has been moved from the mechanical coupling table to its own table within the mass group. As a result, the maximum static vertical mass can be defined as follows:

1. At vehicle level, when no coupling is installed, but towing maximum masses are available. For example, a passenger car that is delivered without a coupling device.
2. At coupling level, by means of the MechanicalCouplingNumber as the identifier, which is also included in the mechanical coupling table. This allows the maximum static vertical mass to be linked to multiple attachment points on the vehicle. For example, when a vehicle has two coupling device options, such as a 50 mm ball coupling (75 kg) and a drawbar coupling (1,000 kg).

The S-value of the coupling device itself remains in the MechanicalCouplingTable.

EXAMPLE XML

```
<xs:complexType name="MaximumStaticVerticalMassCouplingPointTable">
  <xs:sequence>
    <xs:element name="MaximumStaticVerticalMassCouplingPointGroup" maxOccurs="unbounded" type="MaximumStaticVerticalMassCouplingPointGroup"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="MaximumStaticVerticalMassCouplingPointGroup">
  <xs:all>
    <xs:element name="MechanicalCouplingNumberVerticalMass" minOccurs="0" type="Integer3"/>
    <xs:element name="TechnicallyPermissibleMaximumStaticVerticalMassCouplingPoint" type="Integer6"/>
  </xs:all>
</xs:complexType>
```

Add for vehicle categories: M, N, O, L, R, S. Table is forbidden for T, C

For M1 a MechanicalCouplingNumberVerticalMass is Forbidden (no reference to MechanicalCouplingNumber possible)

General rule:

TechnicallyPermissibleMaximumStaticVerticalMassCouplingPoint for the vehicle
add with no value for MechanicalCouplingNumberVerticalMass

VerticalMTechnicallyPermissibleMaximumStaticVerticalMassCouplingPoint for the coupling
add with a value in MechanicalCouplingNumberVerticalMass

COUPLING DEVICES

REGULATION REFERENCE

Commission Implementing Regulation (EU) 2020/683 of 15 April 2020 implementing Regulation (EU) 2018/858.

USAGE INFORMATION

Make a clear distinction between coupling devices which are actually fitted on the vehicle when produced of coupling devices which can be fitted after production of the vehicle.

EXAMPLE XML

```
<xs:complexType name="MechanicalCouplingTable">
  <xs:sequence>
    <xs:element name="MechanicalCouplingGroup" maxOccurs="unbounded" type="MechanicalCouplingGroup"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="MechanicalCouplingGroup">
  <xs:all>
    <xs:element name="MechanicalCouplingNumber" type="Integer3"/>
    <xs:element name="MechanicalCouplingLocation" minOccurs="0" type="MechanicalCouplingLocationCode"/>
    <xs:element name="MechanicalCouplingTypeAccordingAppendixEU" minOccurs="0" type="Text120"/>
  </xs:all>
</xs:complexType>
```

Add for vehicle categories: M2, M3, N, O, L, T, C, R, S. For M1 the Table is Forbidden.
Add information on the coupling devices which are **actually fitted** on the vehicle.

```
<xs:element name="MechanicalCouplingPartsTable" minOccurs="0" type="MechanicalCouplingPartsTable"/>
```

Add for vehicle categories: M2, M3, N, O, T, C, R, S. For M1 and L the Table is Forbidden.

Add information on the different parts of the MechanicalCoupling fitted

```
<xs:complexType name="MechanicalCouplingCanBeFittedTable">
```

Add information on coupling devices that are not actually fitted on the vehicle, but are allowed to be fitted. For M1, L, T, C, R and S and StageOfCompletion C,V the Table is Forbidden.

TRAILER MASSES VEHICLE CATEGORY M AND N

REGULATION REFERENCE

Commission Implementing Regulation (EU) 2020/683 of 15 April 2020 implementing Regulation (EU) 2018/85.

- 16. Technically permissible maximum masses
- 16.1. Technically permissible maximum laden mass: ... kg
- 16.2. Technically permissible mass on each axle:
 - 1. ... kg, 2. ... kg, 3. ... kg, etc.
- 16.4. Technically permissible maximum mass of the combination: ... kg
- 18. Technically permissible maximum towable mass in case of:
 - 18.1. Drawbar trailer: ... kg
 - 18.3. Centre-axle trailer: ... kg
 - 18.4. Unbraked trailer: ... kg
- 19. Technically permissible maximum static vertical mass at the coupling point: ... kg

Field IVI 2.0	Ruleset
MechanicalCouplingNumberTowingMasses	Optional to use, can be empty. If a value is put in it, it must appear in MechanicalCouplingNumber The number of MechanicalCouplingNumberTowingMasses mentioned here must equal the number of MechanicalCouplingNumber

Field IVI 2.0	Ruleset
BrakedTypeTrail	Item 18.x Always mandatory UNB or BRK when a value is stated in TechnicallyPermissibleMaximumTowableMass
BodyworkTypeTrailer	Item 18.x Always mandatory when BRK is in BrakedTypeTrail and a value is in TechnicallyPermissibleMaximumTowableMass
TechnicallyPermissibleMaximumCombinationMass	Item 16.4 must occur at least once with a value BrakedTypeTrail can be UNB or BRK, not mandatory to use
TechnicallyPermissibleMaximumTowableMass	Item 18.x must occur at least once with a value

EXAMPLE DATA COC:

Masses

13. Mass in running order / 13.2 Actual mass of the vehicle	: 1680 / 1707	kg
16. Technically permissible maximum masses		
16.1 Technically permissible maximum laden mass	: 2135	kg
16.2 Technically permissible mass on each axle: No.1/No.2/No.3	: 1150 / 1150 / NA	kg
16.4 Technically permissible maximum mass of the combination	: 2935	kg
18. Technically permissible maximum towable mass in case of		
18.1 Drawbar trailer	800 kg	
18.3 Centre-axle trailer	800 kg	
18.4 Unbraked trailer	750 kg	
19. Technically permissible maximum static vertical mass at the coupling point	: 70	kg

EXAMPLE ECOC XML FILE

```

<MassGroup>
  <MassInRunningOrder>1680</MassInRunningOrder>
  <ActualMass>1707</ActualMass>
  <TechnicallyPermissibleMaximumLadenMass>2135</TechnicallyPermissibleMaximumLadenMass>
  <MaximumStaticVerticalMassCouplingPointTable>
    <MaximumStaticVerticalMassCouplingPointGroup>
      <TechnicallyPermissibleMaximumStaticVerticalMassCouplingPoint>70</TechnicallyPermissibleMaximumStaticVerticalMassCouplingPoint>
    </MaximumStaticVerticalMassCouplingPointGroup>
  </MaximumStaticVerticalMassCouplingPointTable>
</MassGroup>
<TowingBrakedTypeTrailTable>
  <TowingBrakedTypeTrailGroup>
    <BrakedTypeTrail>BRK</BrakedTypeTrail>
    <BodyworkTypeTable>
      <BodyworkTypeGroup>
        <BodyworkTypeTrailer>DB</BodyworkTypeTrailer>
        <TechnicallyPermissibleMaximumTowableMass>800</TechnicallyPermissibleMaximumTowableMass>
      </BodyworkTypeGroup>
      <BodyworkTypeGroup>
        <BodyworkTypeTrailer>DC</BodyworkTypeTrailer>
        <TechnicallyPermissibleMaximumTowableMass>800</TechnicallyPermissibleMaximumTowableMass>
      </BodyworkTypeGroup>
    </BodyworkTypeTable>
  </TowingBrakedTypeTrailGroup>
  <TowingBrakedTypeTrailGroup>
    <BrakedTypeTrail>UNB</BrakedTypeTrail>
    <BodyworkTypeTable>
      <BodyworkTypeGroup>
        <TechnicallyPermissibleMaximumTowableMass>750</TechnicallyPermissibleMaximumTowableMass>
      </BodyworkTypeGroup>
    </BodyworkTypeTable>
  </TowingBrakedTypeTrailGroup>
  <TowingBrakedTypeTrailGroup>
    <BodyworkTypeTable>
      <BodyworkTypeGroup>
        <TechnicallyPermissibleMaximumCombinationMass>2935</TechnicallyPermissibleMaximumCombinationMass>
      </BodyworkTypeGroup>
    </BodyworkTypeTable>
  </TowingBrakedTypeTrailGroup>
</TowingBrakedTypeTrailTable>

```

(FAMILY) IDENTIFIERS

REGULATION REFERENCE

Commission Implementing Regulation (EU) 2020/683 of 15 April 2020 implementing Regulation (EU) 2018/85.

- 0.2.3. Identifiers (¹):
 - 0.2.3.1. Interpolation family's identifier: ...
 - 0.2.3.2. ATCT family's identifier: ...
 - 0.2.3.3. PEMS family's identifier: ...
 - 0.2.3.4. Roadload family's identifier: ...
 - 0.2.3.5. Roadload Matrix family's identifier (if applicable): ...
 - 0.2.3.6. Periodic regeneration family's identifier: ...
 - 0.2.3.7. Evaporative test family's identifier: ...

EXAMPLE DATA COC:

0.2.3. Identifiers

0.2.3.1. Interpolation family's identifier	IP-YHV____ML6_712A-YAR	0.2.3.2. ATCT family's identifier	AT-YHV____7102-VR3
0.2.3.3. PEMS family's identifier	2-YAR-DQ	0.2.3.4. Roadload family's identifier	RL-____MP2CML6_7020-VF3
0.2.3.5. Roadload matrix family's identifier	NA	0.2.3.6. Periodic regeneration family's identifier	PR-YHV____0107-VR3
0.2.3.7. Evaporative test family's identifier	NA		

USAGE INFORMATION

The TestFamilyIdentifiers information has been moved to the EnergySourceGroup, in order to make it possible to state different values per EnergySource as this might be the case with the ATCT Family. .

EXAMPLE ECOC XML FILE:

```
<TestFamilyIdentifiersTable>
  <TestFamilyIdentifiersGroup>
    <TestFamilyIdentifier>IP</TestFamilyIdentifier>
    <TestFamilyIdentifierValue>IP-YHV____ML6_712-YAR</TestFamilyIdentifierValue>
  </TestFamilyIdentifiersGroup>
  <TestFamilyIdentifiersGroup>
    <TestFamilyIdentifier>ATCT</TestFamilyIdentifier>
    <TestFamilyIdentifierValue>AT-YHV____7102-VR3</TestFamilyIdentifierValue>
  </TestFamilyIdentifiersGroup>
  <TestFamilyIdentifiersGroup>
    <TestFamilyIdentifier>PEMS</TestFamilyIdentifier>
    <TestFamilyIdentifierValue>2-YAR-DQ</TestFamilyIdentifierValue>
  </TestFamilyIdentifiersGroup>
  <TestFamilyIdentifiersGroup>
    <TestFamilyIdentifier>RL</TestFamilyIdentifier>
    <TestFamilyIdentifierValue>RL-____MP2CML6_7020-VF3</TestFamilyIdentifierValue>
  </TestFamilyIdentifiersGroup>
  <TestFamilyIdentifiersGroup>
    <TestFamilyIdentifier>PR</TestFamilyIdentifier>
    <TestFamilyIdentifierValue>PR-YHV____0107-VR3</TestFamilyIdentifierValue>
  </TestFamilyIdentifiersGroup>
</TestFamilyIdentifiersTable>
```

Enumeration added: 28 / 29 / 32 / 33 / 35 / 37 / 38

List of eco-innovations approved under WLTP					
Passenger cars					
Eco-innovation code	Commission Implementing Decision (link)	Technology	Amendments	Powertrains (other than ICEV)	Fuels (other than diesel and gasoline)
28 ¹	CID (EU) 2019/1119	LED lights	CID (EU) 2020/1714	NOVC- HEV	Alternative fuels
37	CID (EU) 2020/174	Alternator	CID (EU) 2021/136	-	Alternative fuels
29	CID (EU) 2020/174	Alternator	CID (EU) 2021/488	-	Alternative fuels
32	CID (EU) 2020/1167	48V motor generator with DC/DC converter	CID (EU) 2021/488 CID (EU) 2022/252	NOVC- HEV	Alternative fuels
33	CID (EU) 2020/1232	12V motor generator	-	NOVC- HEV	Alternative fuels
38	CID (EU) 2022/716	Smart diesel fuel heater	-	NOVC-HEV	Only diesel
Light Commercial Vehicles					
Eco-innovation code	Commission Implementing Decision (link)	Technology	Amendments	Powertrains (other than ICEV)	Fuels (other than diesel and gasoline)
29	CID (EU) 2020/174	Alternator	CID (EU) 2021/488	-	Alternative fuels
32	CID (EU) 2020/1167	48V motor generator with DC/DC converter	CID (EU) 2021/488 CID (EU) 2022/252	NOVC- HEV	Alternative fuels
33	CID (EU) 2020/1232	12V motor generator	-	NOVC- HEV	Alternative fuels
35	CID (EU) 2020/1339	LED lights	CID (EU) 2020/1714 CID (EU) 2021/136	NOVC- HEV	Alternative fuels
38	CID (EU) 2022/716	Smart diesel fuel heater	-	NOVC-HEV	Only diesel

USAGE INFORMATION

State the Member State country code separately from the eco innovations code.

EXAMPLE ECOC XML FILE:

```
<EcoInnovationsTable>
  <EcoInnovationsGroup>
    <EcoInnovationCountry>e6</EcoInnovationCountry>
    <GeneralCodeEcoInnovation>37</GeneralCodeEcoInnovation>
  </EcoInnovationsGroup>
  <EcoInnovationsGroup>
    <EcoInnovationCountry>e6</EcoInnovationCountry>
    <GeneralCodeEcoInnovation>29</GeneralCodeEcoInnovation>
  </EcoInnovationsGroup>
</EcoInnovationsTable>
```

PUREELECTRICVEHICLEINDICATOR

REGULATION REFERENCE

Commission Implementing Regulation (EU) 2020/683 of 15 April 2020 implementing Regulation (EU) 2018/85.

Power plant

20. Manufacturer of the engine: ...
21. Engine code as marked on the engine: ...
22. Working principle: ...
23. Pure electric: yes/no (*)

USAGE INFORMATION

The Forum has decided that the definition of the field does not refer to a electric switchmode but indicates whether the vehicle is purely electric. This makes it actually a superfluous field because this is already indicated when the Energysource(s) are all 95 (Electric).

USAGE INFORMATION

If an indicator or an optional code field is relevant within the vehicle category, a value must be specified here. This means that even if the indicator "Pure Electric y/n" has no value for e.g. M1 Diesel vehicles, an "N" must still be specified here.

MULTISTAGE VEHICLES**REGULATION REFERENCE**

Multi-stage vehicle are vehicles that have been built and finished in more than one stage, normally by two or more different manufacturers.

For example: Multistage vehicle chassis and cabin modifications involve an incomplete vehicle, like a chassis-cab, being completed by a second-stage manufacturer who adds specialized components to create a functional vehicle, such as a box truck or motor home. This two or more stage process involves different manufacturers adding parts to the vehicle's base to serve a specific purpose, like carrying cargo or functioning as a mobile workshop.

Definitions (2018/858):

'multi-stage type-approval' means the procedure whereby one or more approval authorities certify that depending on its state of completion, an incomplete or completed type of vehicle satisfies the relevant administrative provisions and technical requirements;

'base vehicle' means any vehicle that is used at the initial stage of a multi-stage type-approval

'incomplete vehicle' means any vehicle that must undergo at least one further stage of completion in order to meet the relevant technical requirements of this Regulation;

'completed vehicle' means a vehicle resulting from the multistage type-approval that meets the relevant technical requirements of this Regulation;

'complete vehicle' means a vehicle that does not need to be completed in order to meet the relevant technical requirements of this Regulation;

With the implementation of EU 2018/858, the stage manufacturer is responsible for the data of the vehicle relating to the specific stage. Previously, it was the responsibility of the final stage manufacturer to consolidate all the data of the vehicle on the last stage CoC.

This makes the process of processing the CoC's for the registration purpose complex. This chapter describes how the multistage vehicles should be included within the IVI 2.0 message structure and how data could be processed. This will probably be different per Member State.

Possible multiple stages in this process:

From Status	To Status	To Status
incomplete (I)	completed (V)	
complete (C)	completed (V)	
incomplete (I)	incomplete (I)	completed (V)

HOW TO ENTER STAGE INFORMATION IN DE ECOC XML

Example setup for three stages.

ManufacturerTable			
ManufacturerGroup			
ManufacturerStageNumber	1	2	3
ManufacturerName	First stage manufacturer name	Second stage manufacturer name	Third stage manufacturer name
ManufacturerAddressLine1	First stage address information	Second stage address information	Third stage address information
ManufacturerAddressLine2	First stage address information	Second stage address information	Third stage address information
ManufacturerAddressLine3	First stage address information	Second stage address information	Third stage address information
ManufacturerPlaceOfResidence	First stage address information place	Second stage address information place	Third stage address information place
ManufacturerCountryOfResidence	First stage address information country	Second stage address information country	Third stage address information country
PreviousStageTypeApprovalNumber		Type approval number previous stage	Type approval number previous stage
PreviousStageType		Type previous stage	Type previous stage
PreviousStageVariant		Variant previous stage	Variant previous stage
PreviousStageVersion		Version previous stage	Version previous stage

EXAMPLE ECOC XML FILE:

A multistage vehicle consists of more than one stage where each stage manufacturer has to state the relevant vehicle information in the eCoC.

First stage manufacturer

States the vehicle identification number, which has to stay the same during all stages:

```
...
<VehicleIdentificationNumber>XRA1111122222KKKK</VehicleIdentificationNumber>
<StageOfCompletion>1</StageOfCompletion>
...
```

States the typeapprovalnumber of the first stage. The typeapprovalnumber **can** change between different stages. At least Typeapprovalnumber or Variant or Version have to be different per stage.

```
..
<TypeApprovalNumber>e4*2018/858*0000*00</TypeApprovalNumber>
<TypeApprovalIssueDate>2015-01-01</TypeApprovalIssueDate>
<Type>A0012</Type>
<Variant>XYZ123</Variant>
<Version>V123HJ</Version>
..
```

States the stagenumber 1 and the manufacturer's address information. The ManufacturerStageNumber is always mandatory also for vehicles with only one stage.

```
<ManufacturerTable>
  <ManufacturerGroup>
    <ManufacturerStageNumber>1</ManufacturerStageNumber>
    <ManufacturerName>ManufacturerName First stage</ManufacturerName>
    <ManufacturerAddressLine1>AddressLine1</ManufacturerAddressLine1>
    <ManufacturerAddressLine2>AddressLine2</ManufacturerAddressLine2>
    <ManufacturerAddressLine3>AddressLine3</ManufacturerAddressLine3>
    <ManufacturerPlaceOfResidence>PlaceOfResidence</ManufacturerPlaceOfResidence>
    <ManufacturerCountryOfResidence>The Netherlands</ManufacturerCountryOfResidence>
  </ManufacturerGroup>
</ManufacturerTable>
```

Second stage manufacturer

States the vehicle identification number, which has to stay the same during all stages:

```
<VehicleIdentificationNumber>XRA111122222KKKK</VehicleIdentificationNumber>
<StageOfCompletion>V</StageOfCompletion>
```

At least TypeApprovalNumber or Variant or Version have to be different per stage.

```
<TypeApprovalNumber>e4*2018/858*1111*11</TypeApprovalNumber>
<TypeApprovalIssueDate>2015-10-01</TypeApprovalIssueDate>
<Type>BKLK001</Type>
<Variant>BVG00PL</Variant>
<Version>VBHLL009</Version>
```

States the stagenumber 2 and the manufacturer's address information, and states the TypeApprovalNumber/Type/Variant/Version of the previous stage manufacturer.

...

```
<ManufacturerTable>
  <ManufacturerGroup>
    <ManufacturerStageNumber>2</ManufacturerStageNumber>
    <ManufacturerName>ManufacturerName First stage</ManufacturerName>
    <ManufacturerAddressLine1>AddressLine1</ManufacturerAddressLine1>
    <ManufacturerAddressLine2>AddressLine2</ManufacturerAddressLine2>
    <ManufacturerAddressLine3>AddressLine3</ManufacturerAddressLine3>
    <ManufacturerPlaceOfResidence>PlaceOfResidence</ManufacturerPlaceOfResidence>
    <ManufacturerCountryOfResidence>The Netherlands</ManufacturerCountryOfResidence>
    <PreviousStageTypeApprovalNumber>e4*2018/858*0000*00</PreviousStageTypeApprovalN
umber>
    <PreviousStageType>A0012</PreviousStageType>
    <PreviousStageVariant>XYZ123</PreviousStageVariant>
    <PreviousStageVersion>V123HJ</PreviousStageVersion>
  </ManufacturerGroup>
</ManufacturerTable>
```

PROCESSING THE DATA

Different methods can be used to process the data from different stage CoC's. In principle, the data from the first stage must serve as a basis and differences with the subsequent stage must be processed. The processing of data for registration purposes can be different per Member State.

Points of attention here are:

Data which is part of a table (for example AxleTable) will have to be repeated in the second stage eCoC. If you have a first stage vehicle with three axles and in the second stage CoC there's only one Axle stated, combining the two CoC's could mean removing two axles or adding one. This is why the entire set must be included in the case of automated processing.

Single fields at Group level not within a table

For processing to a vehicle eCoC, the different eCoC's can be superimposed on each other based on the order in [ManufacturerStageNumber](#). By following this order, the data from the first eCoC is overwritten with the data from the subsequent eCoC. The issue with this processing is that single fields (e.g. ClassHybridVehicle) that were named in the first stage and have no value in the subsequent stage, remain because they are not overwritten with a new value and it is not clear whether they should be deleted.

HYBRID VEHICLES (NOVC-HEV)

REGULATION REFERENCE

UN Regulation No 177 - Uniform provisions concerning the determination of system power of hybrid electric vehicles and of pure electric vehicles having more than one electric machine for propulsion [2025/1910]

3.3.13. "Not off-vehicle charging hybrid electric vehicle" (NOVC-HEV) means a hybrid electric vehicle that cannot be charged from an external source.

3.3.14. "Hybrid vehicle" means a vehicle equipped with a powertrain containing at least two different categories of propulsion energy converters and at least two different categories of propulsion energy storage systems.

3.3.15. "Hybrid electric vehicle" means a hybrid vehicle equipped with a powertrain containing at least one electric motor or electric motor-generator and at least one internal combustion engine as propulsion energy converter.

USAGE INFORMATION

In case of an NOVC-HEV (ClassHybridVehicle) vehicle, several energy sources must be included in the eCoC, including EnergySource: Electricity (95). Also the engine code for the electric engine has to be mentioned. If this engine does not have its own specifications, the manufacturer of the engine and the engine code must be repeated, working principle must be set to electricity.

The fields which are relevant for the specified energy source have to be mentioned within that energysource group. For instance "MaximumNetPowerCombustion" only for EnergySource: Petrol (10), and "MaximumNetPowerElectric" only for EnergySource: Electricity (95). Also see chapter: EMISSION/SOUND/POWER AND CONSUMPTION FOR DIFFERENT VEHICLE TYPES.

EXAMPLE ECOC XML FILE:

```
<EnergyConvertorTable>
  <EnergyConvertorGroup>
    <ManufacturerEnergyConvertor>TOYOTA</ManufacturerEnergyConvertor>
    <EnergyConvertorCodeMarkedOnEnergyConvertor>2A25</EnergyConvertorCodeMarkedOnEnergyConvertor>
    <WorkingPrinciple>INTPT</WorkingPrinciple>
    <CombustionCycle>4ST</CombustionCycle>
    <NumberOfCylinders>4</NumberOfCylinders>
    <ArrangementCylinders>LI</ArrangementCylinders>
    <EngineCapacity>2487</EngineCapacity>
    <EnergySourceTable>
      <EnergySourceGroup>
        <EnergySource>10</EnergySource>
        <SoundLevelGroup>
          <SoundLevelStationary>70</SoundLevelStationary>
          <SoundLevelStationaryEngineSpeed>2500</SoundLevelStationaryEngineSpeed>
          <SoundLevelDriveBy>68</SoundLevelDriveBy>
        </SoundLevelGroup>
        <PowerGroup>
          <MaximumNetPowerCombustion>131</MaximumNetPowerCombustion>
          <EngineSpeedMaximumNetPower>5700</EngineSpeedMaximumNetPower>
        </PowerGroup>
        <TestRdeGroup>
          <TestWltpType1Group>
            <TestWltpCO2Group>
              <TestWltpFuelConsumptionGroup>
                <TestFamilyIdentifiersTable>
              </TestFamilyIdentifiersTable>
            </TestWltpFuelConsumptionGroup>
          </TestWltpCO2Group>
        </TestWltpType1Group>
      </TestRdeGroup>
    </EnergySourceGroup>
  </EnergySourceTable>
</EnergyConvertorGroup>
</EnergyConvertorTable>
```

PLUGIN HYBRID VEHICLES (OVC-HEV)

REGULATION REFERENCE

UN Regulation No 177 - Uniform provisions concerning the determination of system power of hybrid electric vehicles and of pure electric vehicles having more than one electric machine for propulsion [2025/1910]

3.3.12. "Off-vehicle charging hybrid electric vehicle" (OVC-HEV) means a hybrid electric vehicle that can be charged from an external source.

USAGE INFORMATION

In case of an OVC-HEV (ClassHybridVehicle), several energy sources must be included in the eCoC, including EnergySource: Electricity (95). Also the engine code for the electric engine has to be mentioned. If this engine does not have it's own specifications, the manufacturer of the engine and the engine code must be repeated, working principle must be set to electricity.

The fields which are relevant for the specified energy source have to be mentioned within that energysource group. For instance "MaximumNetPowerCombustion" only for EnergySource: Petrol (10), and "MaximumNetPowerElectric" only for EnergySource: Electricity (95). Also other specific OVC fields have to be added for energysource electricity, example:

WltpEquivalentAllElectricOffVehicleChargingRange. Also see chapter: EMISSION/SOUND/POWER AND CONSUMPTION FOR DIFFERENT VEHICLE TYPES.

EXAMPLE ECOC XML FILE:

```
<EnergyConvertorTable>
  <EnergyConvertorGroup>
    <ManufacturerEnergyConvertor>TOYOTA</ManufacturerEnergyConvertor>
    <EnergyConvertorCodeMarkedOnEnergyConvertor>M20A</EnergyConvertorCodeMarkedOnEnergyConvertor>
    <WorkingPrinciple>INTPI</WorkingPrinciple>
    <CombustionCycle>4ST</CombustionCycle>
    <NumberOfCylinders>4</NumberOfCylinders>
    <ArrangementCylinders>LI</ArrangementCylinders>
    <EngineCapacity>1987</EngineCapacity>
    <EnergySourceTable>
      <EnergySourceGroup>
        <EnergySource>10</EnergySource>
        <SoundLevelGroup>
          <PowerGroup>
            <TestRdeGroup>
              <TestWltpType1Group>
                <TestWltpCO2Group>
                  <TestWltpFuelConsumptionGroup>
                    <TestFamilyIdentifiersTable>
                      </EnergySourceGroup>
                    </EnergySourceTable>
                  </EnergySourceGroup>
                </EnergySourceTable>
              </EnergySourceGroup>
            </EnergySourceTable>
          </EnergySourceGroup>
        </EnergySourceTable>
      </EnergySourceGroup>
    </EnergySourceTable>
  </EnergyConvertorGroup>
  <EnergyConvertorGroup>
    <ManufacturerEnergyConvertor>TOYOTA</ManufacturerEnergyConvertor>
    <EnergyConvertorCodeMarkedOnEnergyConvertor>M20A</EnergyConvertorCodeMarkedOnEnergyConvertor>
    <WorkingPrinciple>ELECT</WorkingPrinciple>
    <EnergySourceTable>
      <EnergySourceGroup>
        <EnergySource>95</EnergySource>
        <PowerGroup>
          <TestWltpElectricRangeGroup>
            <TestWltpEnergyConsumptionGroup>
              </EnergySourceGroup>
            </EnergySourceTable>
          </EnergySourceGroup>
        </EnergySourceTable>
      </EnergySourceGroup>
    </EnergySourceTable>
  </EnergyConvertorGroup>
</EnergyConvertorTable>
```

PURE ELECTRIC VEHICLES (PEV)

REGULATION REFERENCE

UN Regulation No 177 - Uniform provisions concerning the determination of system power of hybrid electric vehicles and of pure electric vehicles having more than one electric machine for propulsion [2025/1910]

3.3.16. "Pure electric vehicle" (PEV) means a vehicle equipped with a powertrain containing exclusively electric machines as propulsion energy converters and exclusively rechargeable electric energy storage systems as propulsion energy storage systems

USAGE INFORMATION

In case of a pure electric vehicle (PureElectricVehicleIndicator = Y) the fields relevant for the electric engine and energysource have to be available in the eCoC. In case of several electric engines, the data for each engine must be added. If these engines do not have their own specifications, the manufacturer, engine code and working principle must be repeated. In case of a fully electric vehicle, the data specified for the energy source of the first engine must be repeated for the next engine(s), deviating values must be adjusted. Also see chapter: EMISSION/SOUND/POWER AND CONSUMPTION FOR DIFFERENT VEHICLE TYPES.

Note: A different approach has been chosen for fully electric vehicles because it's not clear how to enter the data for the different engines and energy sources. The data that applies to the engines sometimes apply to that specific engine or could be applicable for the vehicle as a whole. It has been discussed to have an option available to add energy source information on different levels in the message. This was not chosen because it would make the processing of the data too complex and difficult to check against the type approval. Therefore, the data must be repeated for this type of vehicle. Energy source electricity must be provided per engine, so the values must be repeated (if the same) for each engine because vehicle-level registration is not supported. This must be taken into account when processing to the registration processes.

EXAMPLE ECOC XML FILE:

```
<EnergyConverterTable>
  <EnergyConverterGroup>
    <ManufacturerEnergyConverter>AISIN</ManufacturerEnergyConverter>
    <EnergyConverterCodeMarkedOnEnergyConverter>1XM</EnergyConverterCodeMarkedOnEnergyConverter>
    <WorkingPrinciple>ELECT</WorkingPrinciple>
  <EnergySourceTable>
    <EnergySourceGroup>
      <EnergySource>95</EnergySource>
      <SoundLevelGroup>
        <SoundLevelDriveBy>65</SoundLevelDriveBy>
      </SoundLevelGroup>
      <PowerGroup>
        <Maximum30MinutesPower>73.0</Maximum30MinutesPower>
        <MaximumNetPowerElectric>150</MaximumNetPowerElectric>
      </PowerGroup>
      <TestWltpElectricRangeGroup>
        <WltpPureElectricRange>404</WltpPureElectricRange>
        <WltpPureElectricRangeCity>522</WltpPureElectricRangeCity>
      </TestWltpElectricRangeGroup>
      <TestWltpEnergyConsumptionGroup>
        <WltpEnergyConsumptionPureElectricLow>133</WltpEnergyConsumptionPureElectricLow>
        <WltpEnergyConsumptionPureElectricMedium>148</WltpEnergyConsumptionPureElectricMedium>
        <WltpEnergyConsumptionPureElectricHigh>167</WltpEnergyConsumptionPureElectricHigh>
        <WltpEnergyConsumptionPureElectricExtraHigh>241</WltpEnergyConsumptionPureElectricExtraHigh>
        <WltpEnergyConsumptionPureElectricCombined>183</WltpEnergyConsumptionPureElectricCombined>
      </TestWltpEnergyConsumptionGroup>
      <TestFamilyIdentifiersTable>
    </EnergySourceGroup>
  </EnergySourceTable>
</EnergyConverterGroup>
</EnergyConverterTable>
<EnergyConverterTable>
  <EnergyConverterGroup>
    <ManufacturerEnergyConverter>AISIN</ManufacturerEnergyConverter>
    <EnergyConverterCodeMarkedOnEnergyConverter>1YM</EnergyConverterCodeMarkedOnEnergyConverter>
    <WorkingPrinciple>ELECT</WorkingPrinciple>
  <EnergySourceTable>
    <EnergySourceGroup>
      <EnergySource>95</EnergySource>
      <SoundLevelGroup>
        <SoundLevelDriveBy>65</SoundLevelDriveBy>
      </SoundLevelGroup>
      <PowerGroup>
        <Maximum30MinutesPower>59.0</Maximum30MinutesPower>
        <MaximumNetPowerElectric>80</MaximumNetPowerElectric>
      </PowerGroup>
      <TestWltpElectricRangeGroup>
        <WltpPureElectricRange>404</WltpPureElectricRange>
        <WltpPureElectricRangeCity>522</WltpPureElectricRangeCity>
      </TestWltpElectricRangeGroup>
    </EnergySourceGroup>
  </EnergySourceTable>
</EnergyConverterGroup>
</EnergyConverterTable>
```

REGULATION REFERENCE

A version number is not specified in the regulations. The version number is technically necessary to be able to recognize and process corrections of eCoC data.

EXAMPLE ECOC XML FILE:

```
<Header>
  <IviReferenceId>6a2957d3-4a32-41a6-a2d0-50681e0bf5e1</IviReferenceId>
  <IviVersionNumberXsd>2.0</IviVersionNumberXsd>
  <IviVersionNumber>1</IviVersionNumber>
  <IviVersionDateTime>2024-02-01T13:35:10.500+02:00</IviVersionDateTime>
  <IntendedCountryRegistration>NL</IntendedCountryRegistration>
  <DesignatedTypeApprovalCountry>e4</DesignatedTypeApprovalCountry>
</Header>
```

USAGE INFORMATION

The first version with the data of the vehicle must always contain the value "1" (mandatory). Only in the event of a correction of the data of the vehicle when, for example, the wheelbase is given a different value because it was incorrectly supplied in version "1", the version must be increased to "2" etc. The value does not change if, for example, a delivery did not go well due to technical issues. Also for a corrected version the IviReferenceId has to have a different value, same as IviVersionDateTime.

EMISSION/SOUND/POWER AND CONSUMPTION FOR DIFFERENT VEHICLE TYPES

HOW TO SET UP IN IVI

For all vehicles M,N,L,T,C an EnergyConvertorCodeMarkedOnEnergyConvertor must be present. For hybrid vehicles, the electric engine may have its own code, then this must be entered. If this is not the case, the EnergyConvertorCodeMarkedOnEnergyConvertor of the combustion engine must be repeated.

As a general rule always state the fields which are specified for the EnergySource. For instance MaximumNetPowerCombustion only for the fossile fuels, and MaximumNetPowerElectric only for electricity. See for specific rules the chapters for different vehicle types in this manual.

The Excel "VehicleTypes-Power-Sound-Consumption" indicates which fields are relevant for different vehicle types. To be found in the eCoC manual folder.

TYRE INFORMATION

REGULATION REFERENCES

2018/858

35. Fitted tyre/wheel combination/energy efficiency class of rolling resistance coefficients (RRC) and tyre category used for CO₂ determination (if applicable) ⁽¹⁶⁰⁾ ⁽¹⁾: ...

O-category

35. Tyre/wheel combination ⁽¹⁶⁰⁾: ...

167/2013

► ⁽²⁾ 4.1.2.2. Mass(es) and tyre(s)

Tyre combination No	Axle No	Tyre dimension incl load capacity index & speed category symbol	Rolling radius ⁽¹⁾ [mm]	Tyre Load rating per tyre [kg]	Maximum permissible mass per axle [kg] ⁽⁴⁾	Maximum permissible mass of the vehicle [kg] ⁽⁴⁾	Maximum permissible vertical load on the coupling point [kg] ⁽⁴⁾ ^(**) ^(***)	Track
								Minimum
1	1	...		...	...	...	...	...

168/2013

Installation of tyres

6.18.1.1. Tyre size designation ^(s): Axle 1: Axle 2 sidecar wheel

HOW TO SETUP IN IVI

Field	Example Marking	Meaning / Explanation
TyreSize	315/80 R22.5	Tyre width 315 mm / aspect ratio 80% / R = radial / rim diameter 22.5 mm
RimSize	22.5	Rim diameter (inch); part of TyreSize
RimOffset	ET120	Rim offset (mm); usually on the rim, not on the tyre
TyrePlyRatingNumber	18PR	Ply Rating / Load Range (construction strength)
LoadCapacityIndexSingleWheel	154	Load Index for single fitment (e.g., 3750 kg)
LoadCapacityIndexTwinWheel	150	Load Index for twin fitment (e.g., 3350 kg)
SpeedCategorySymbol	L	Speed symbol (L = 120 km/h)
TyreCategory	C	Category (e.g., C = Commercial, LT = Light Truck)
TyreTubeType	TL	TL = Tubeless, TT = Tube Type
TyreFittedProductionIndicator	Not part of marking.	Indicates tyre is fitted during production.
TyreMaximumSpeedIndicator	MAX SPEED 120 KM/H	Textual speed limit
TyreType	RADIAL	Construction type (Radial or Bias)
RollingResistanceClass	C	EU label class (A–E); usually on sticker, not embossed on sidewall

InService information on Vehicle level

InServiceMaximumMassTable

InServiceMaximumMassGroup

InServiceMaximumPermissibleMassCountry

InServiceMaximumPermissibleMassTrafficRegulation

InServiceMaximumPermissibleLadenMass

InServiceMaximumPermissibleMassCombination

InService information on Axle level

InServiceMaximumPermissibleLadenMassAxleTable

InServiceMaximumPermissibleLadenMassAxleGroup

InServiceMaximumPermissibleLadenMassAxleCountry

InServiceMaximumPermissibleLadenMassAxleTrafficRegulation

InServiceMaximumPermissibleLadenMassAxle

InService information on AxleGroup level

InServiceMaximumPermissibleLadenMassAxleGroupTable

InServiceMaximumPermissibleLadenMassAxleGroup

InServiceMaximumPermissibleLadenMassAxleGroupGroup

MaximumPermissibleLadenMassAxleGroupCountry

MaximumPermissibleLadenMassAxleGroupTrafficRegulation

MaximumPermissibleLadenMassAxleGroup

HOW TO USE IN IVI 2.0

The “INT” and “NAT” fields have been removed.

If ..Country is stated and the mass fields have a value this means the value is “National”.

If ..Traffic regulation is and the mass fields have a value this means the value is “International”.