


Cumulative scaling efficiency within each platform / NPU

Each panel is normalized to its own MAC baseline. Panels share no absolute axis and must not be read across.

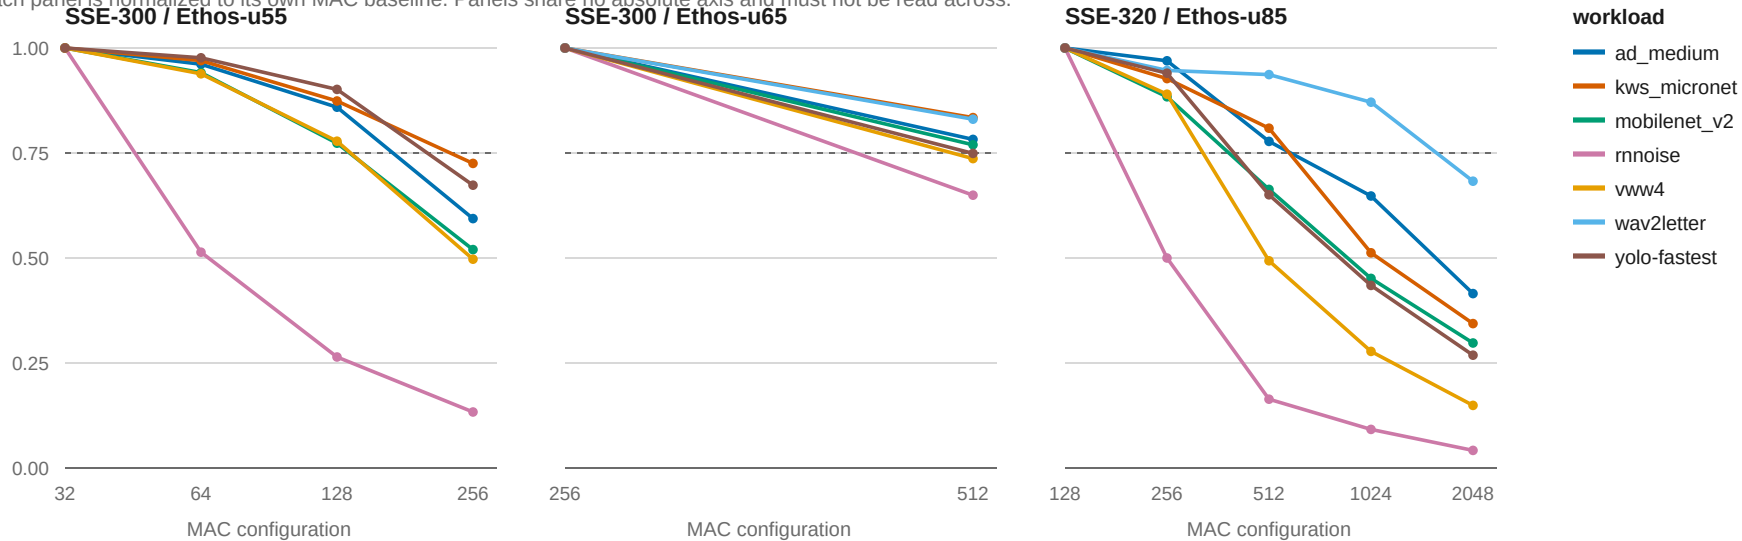

Dashed line: the frozen 0.75 STRONG threshold. Only timing-adapter-enabled platforms appear.

Cumulative efficiency = (cycles(baseline)/cycles(M)) / (M/baseline MAC); 1.0 is ideal proportional scaling.