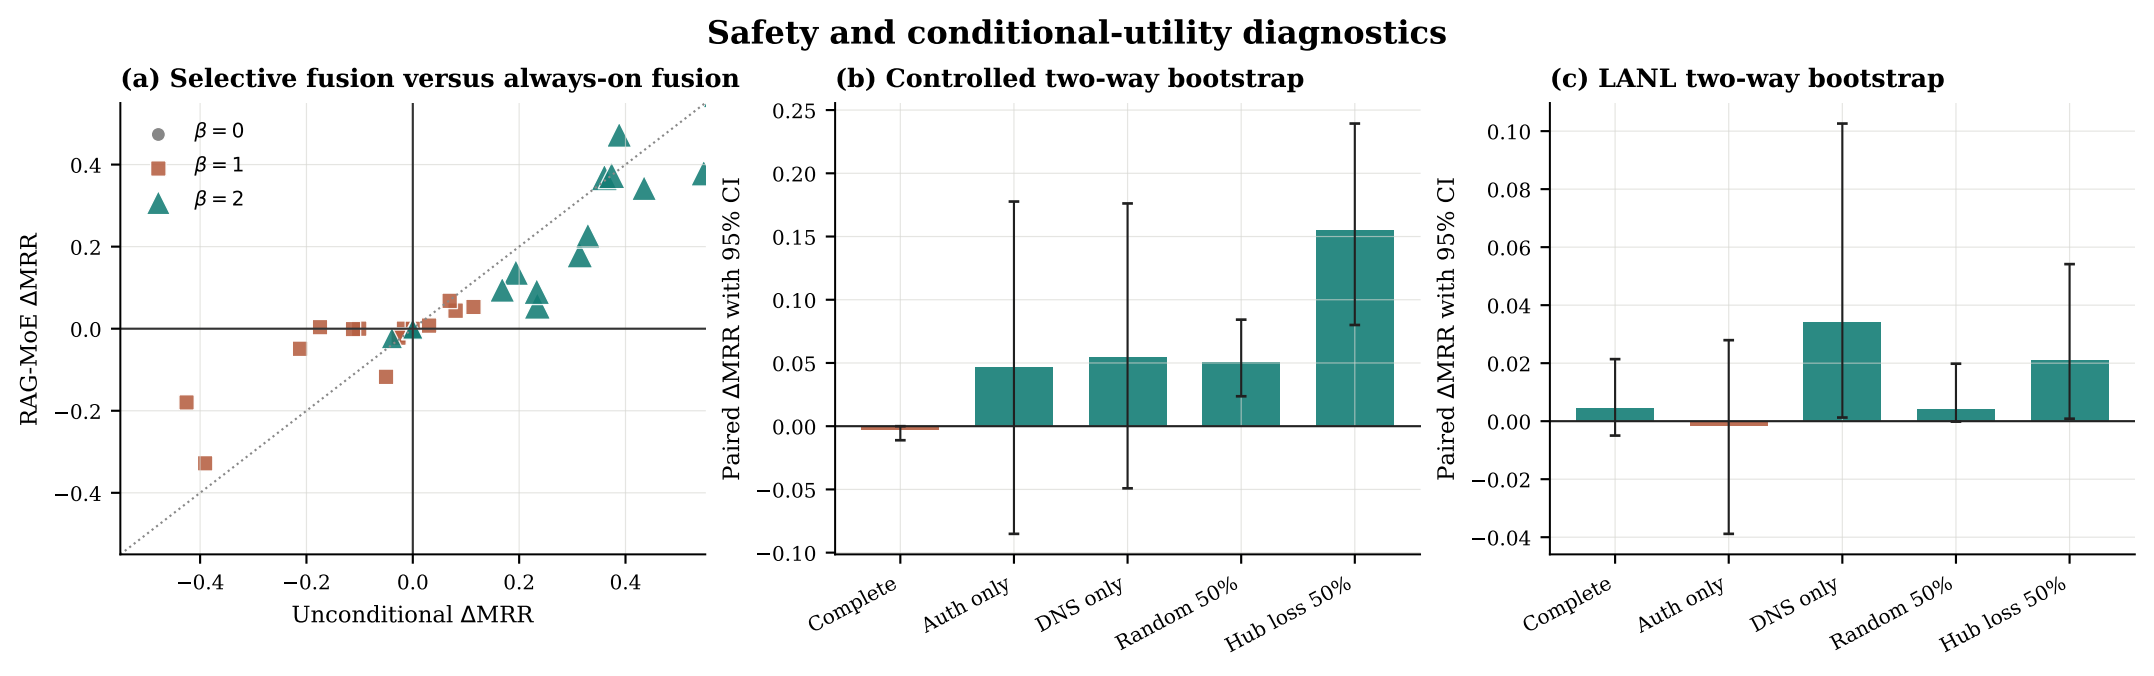
Safety and conditional-utility diagnostics
(a) Selective fusion versus always-on fusion
β = 0
β = 1
β = 2
RAG-MoE ΔMRR
Unconditional ΔMRR
(b) Controlled two-way bootstrap
Paired ΔMRR with 95% CI
Complete
Auth only
DNS only
Random 50%
Hub loss 50%
(c) LANL two-way bootstrap
Paired ΔMRR with 95% CI
Complete
Auth only
DNS only
Random 50%
Hub loss 50%