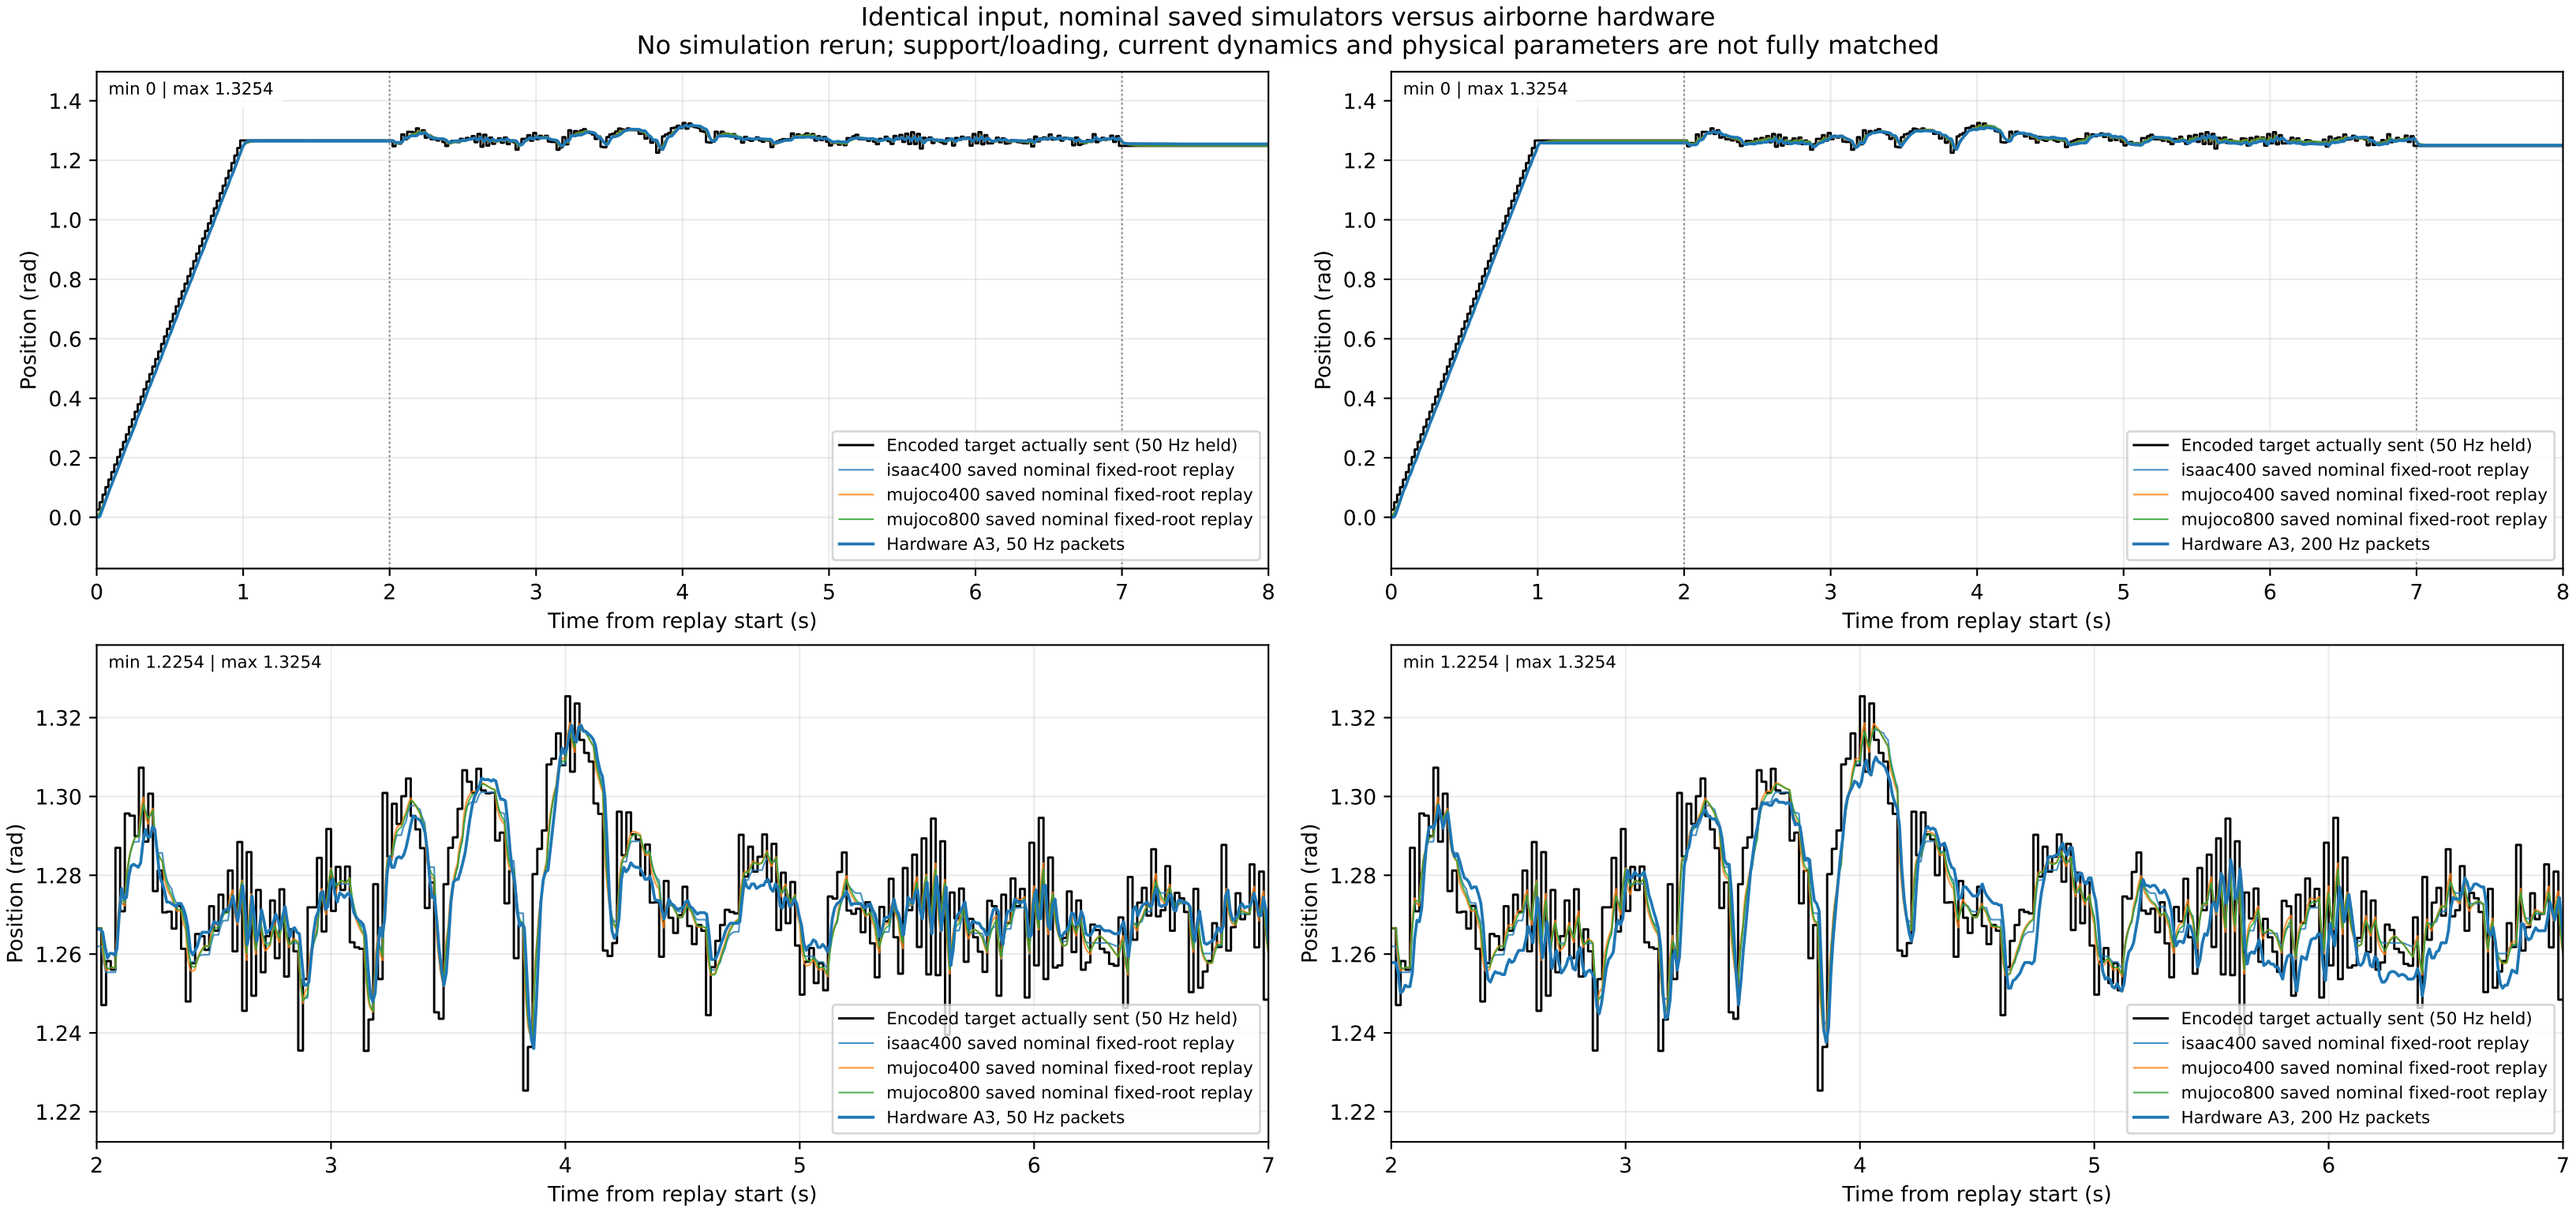

Identical input, nominal saved simulators versus airborne hardware
No simulation rerun; support/loading, current dynamics and physical parameters are not fully matched
min 0 | max 1.3254
Position (rad)
Time from replay start (s)
Encoded target actually sent (50 Hz held)
isaac400 saved nominal fixed-root replay
mujoco400 saved nominal fixed-root replay
mujoco800 saved nominal fixed-root replay
Hardware A3, 50 Hz packets
min 0 | max 1.3254
Position (rad)
Time from replay start (s)
Encoded target actually sent (50 Hz held)
isaac400 saved nominal fixed-root replay
mujoco400 saved nominal fixed-root replay
mujoco800 saved nominal fixed-root replay
Hardware A3, 200 Hz packets
min 1.2254 | max 1.3254
Position (rad)
Time from replay start (s)
Encoded target actually sent (50 Hz held)
isaac400 saved nominal fixed-root replay
mujoco400 saved nominal fixed-root replay
mujoco800 saved nominal fixed-root replay
Hardware A3, 50 Hz packets
min 1.2254 | max 1.3254
Position (rad)
Time from replay start (s)
Encoded target actually sent (50 Hz held)
isaac400 saved nominal fixed-root replay
mujoco400 saved nominal fixed-root replay
mujoco800 saved nominal fixed-root replay
Hardware A3, 200 Hz packets