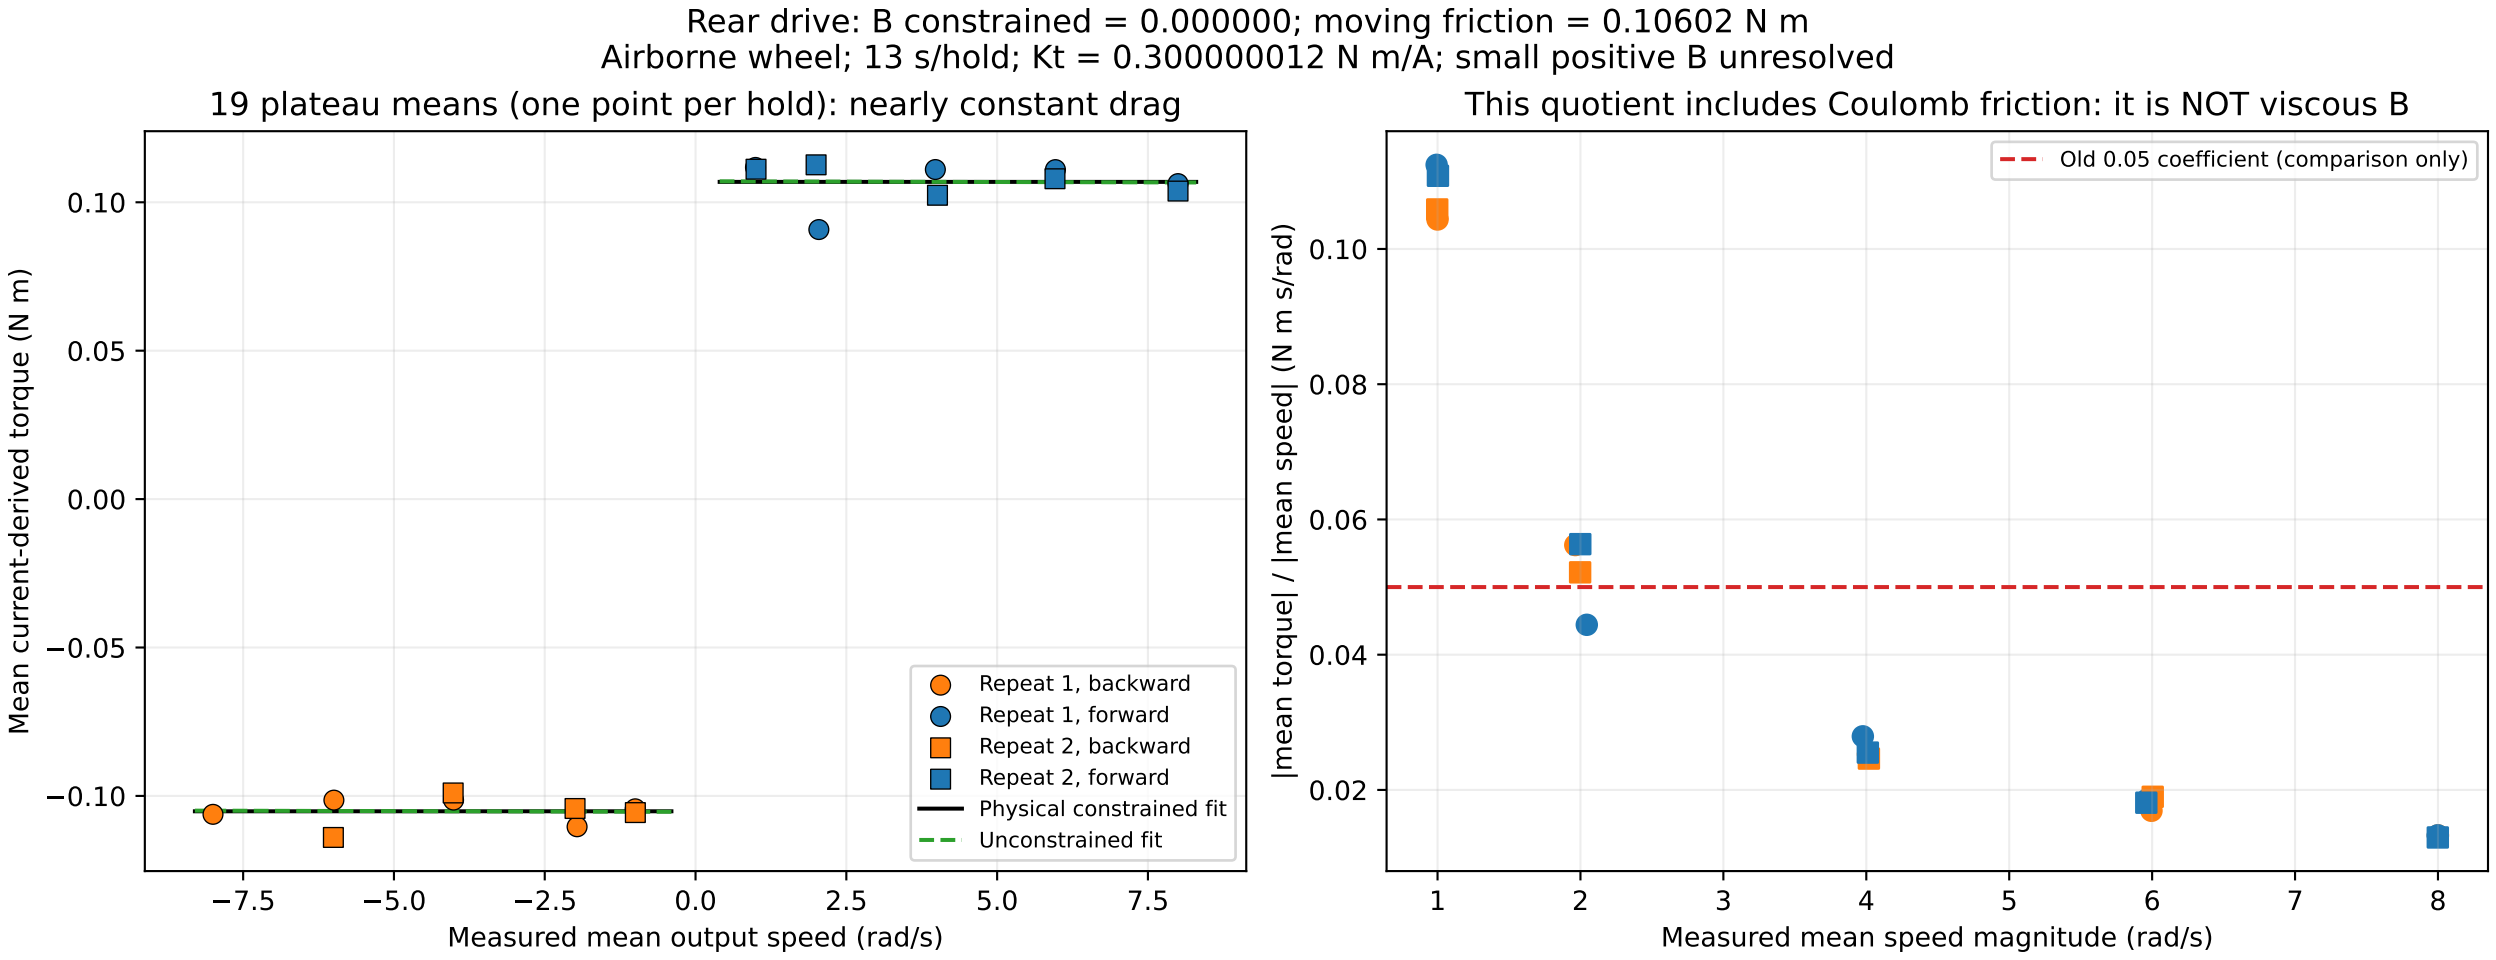
Rear drive: B constrained = 0.000000; moving friction = 0.10602 N m
Airborne wheel; 13 s/hold; Kt = 0.300000012 N m/A; small positive B unresolved
19 plateau means (one point per hold): nearly constant drag
This quotient includes Coulomb friction: it is NOT viscous B
Mean current-derived torque (N m)
Measured mean output speed (rad/s)
|mean torque| / |mean speed| (N m s/rad)
Measured mean speed magnitude (rad/s)
Repeat 1, backward
Repeat 1, forward
Repeat 2, backward
Repeat 2, forward
Physical constrained fit
Unconstrained fit
Old 0.05 coefficient (comparison only)