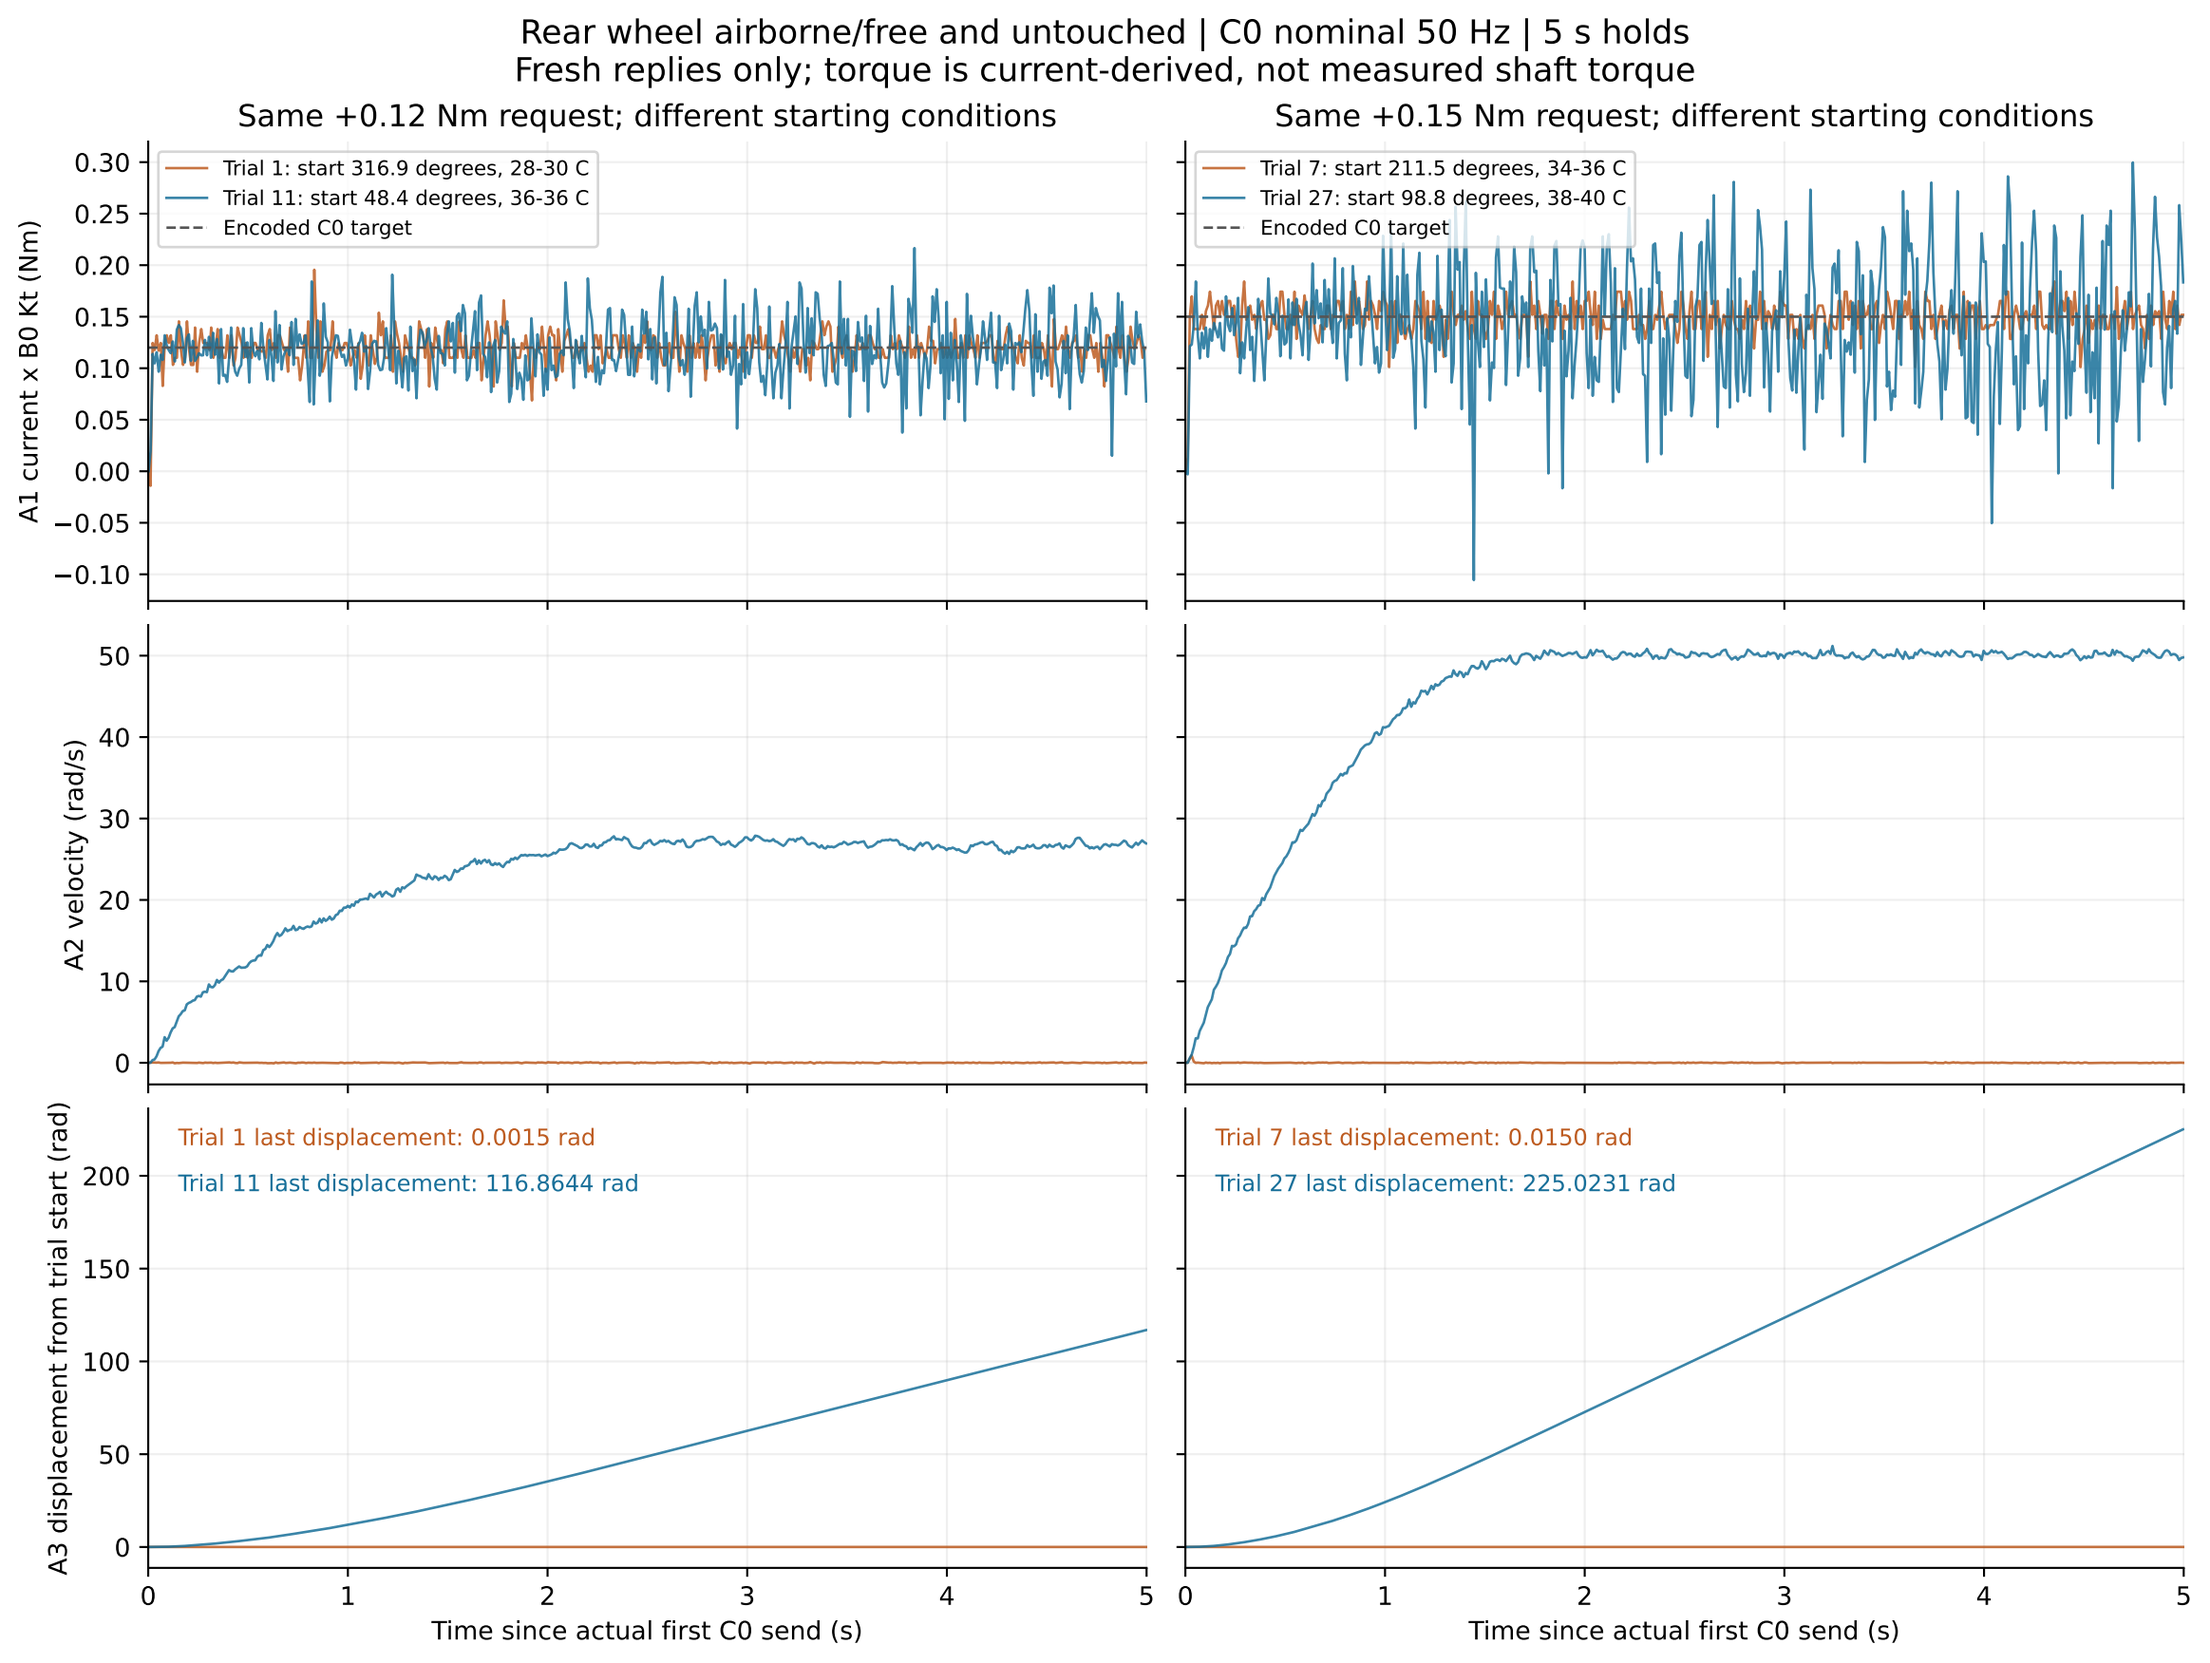
Rear wheel airborne/free and untouched | C0 nominal 50 Hz | 5 s holds
Fresh replies only; torque is current-derived, not measured shaft torque
Same +0.12 Nm request; different starting conditions
Same +0.15 Nm request; different starting conditions
Trial 1: start 316.9 degrees, 28-30 C
Trial 11: start 48.4 degrees, 36-36 C
Encoded C0 target
Trial 7: start 211.5 degrees, 34-36 C
Trial 27: start 98.8 degrees, 38-40 C
Encoded C0 target
A1 current x B0 Kt (Nm)
A2 velocity (rad/s)
A3 displacement from trial start (rad)
Trial 1 last displacement: 0.0015 rad
Trial 11 last displacement: 116.8644 rad
Trial 7 last displacement: 0.0150 rad
Trial 27 last displacement: 225.0231 rad
Time since actual first C0 send (s)
Time since actual first C0 send (s)