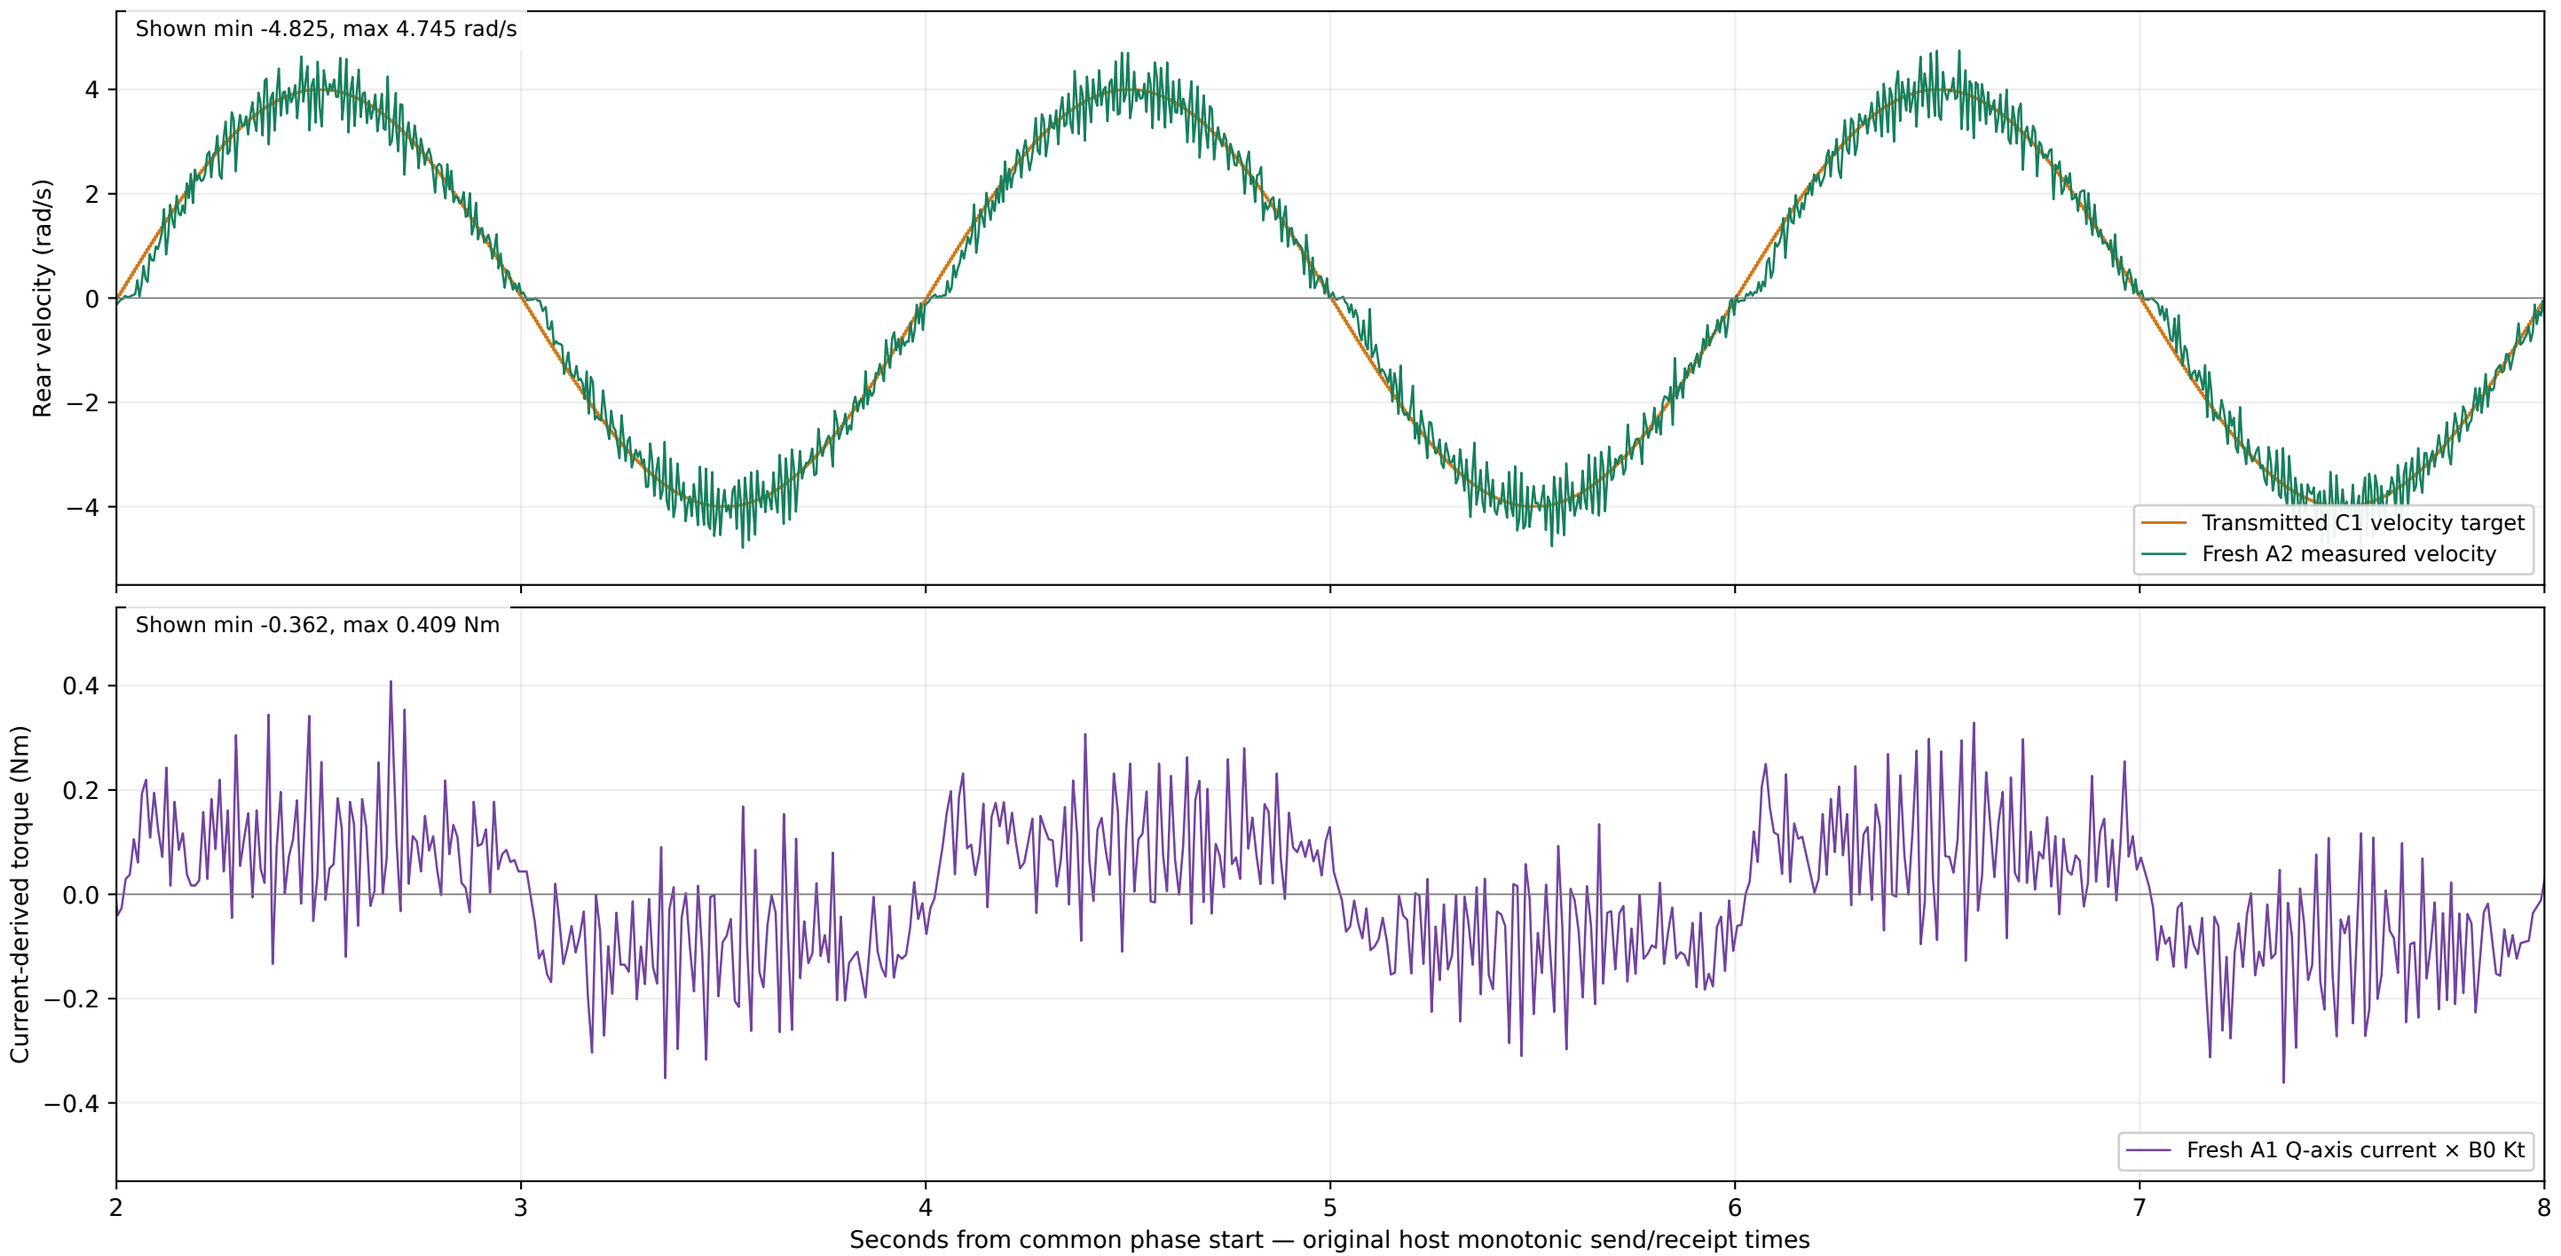
Rear C1 velocity tracking | 0.5 Hz sine, amplitude ±4 rad/s | three-cycle zoom
20261030_103805_187108_drive_velocity_sine.csv | rear airborne/free | target packets ≈200 Hz
Same time origin for both panels; no response shift or smoothing; torque is not shaft/net torque
Shown min -4.825, max 4.745 rad/s
Rear velocity (rad/s)
Transmitted C1 velocity target
Fresh A2 measured velocity
Shown min -0.362, max 0.409 Nm
Current-derived torque (Nm)
Fresh A1 Q-axis current × B0 Kt
Seconds from common phase start — original host monotonic send/receipt times