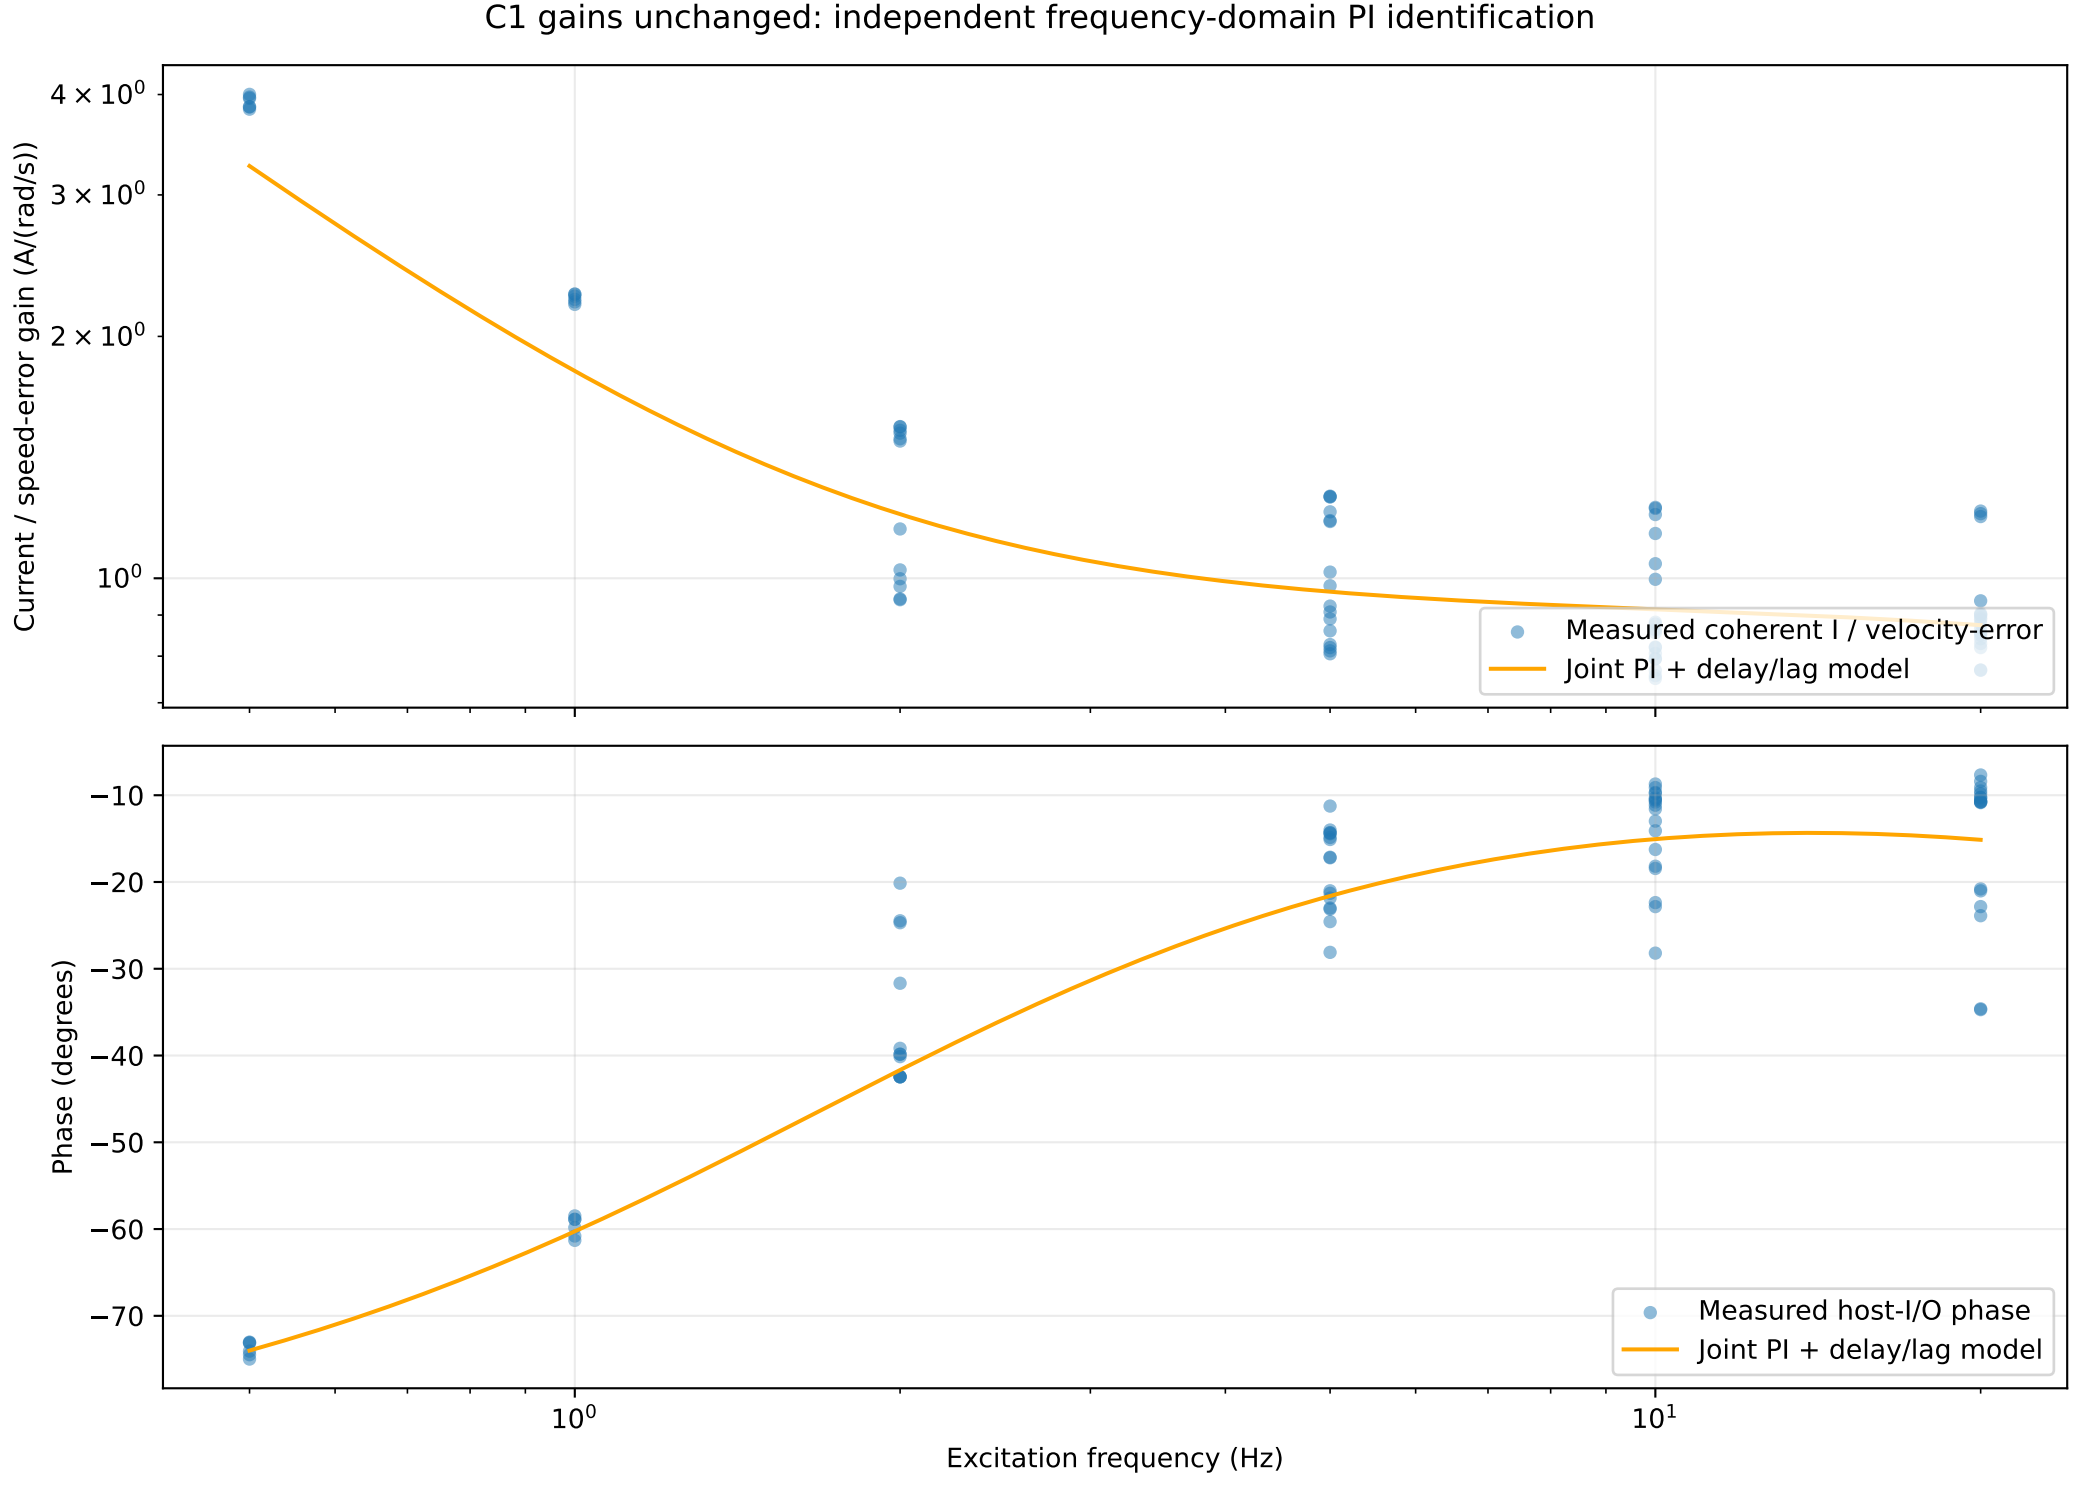
C1 gains unchanged: independent frequency-domain PI identification
Current / speed-error gain (A/(rad/s))
4×10^0
3×10^0
2×10^0
10^0
Measured coherent I / velocity-error
Joint PI + delay/lag model
Phase (degrees)
−10
−20
−30
−40
−50
−60
−70
Measured host-I/O phase
Joint PI + delay/lag model
10^0
10^1
Excitation frequency (Hz)