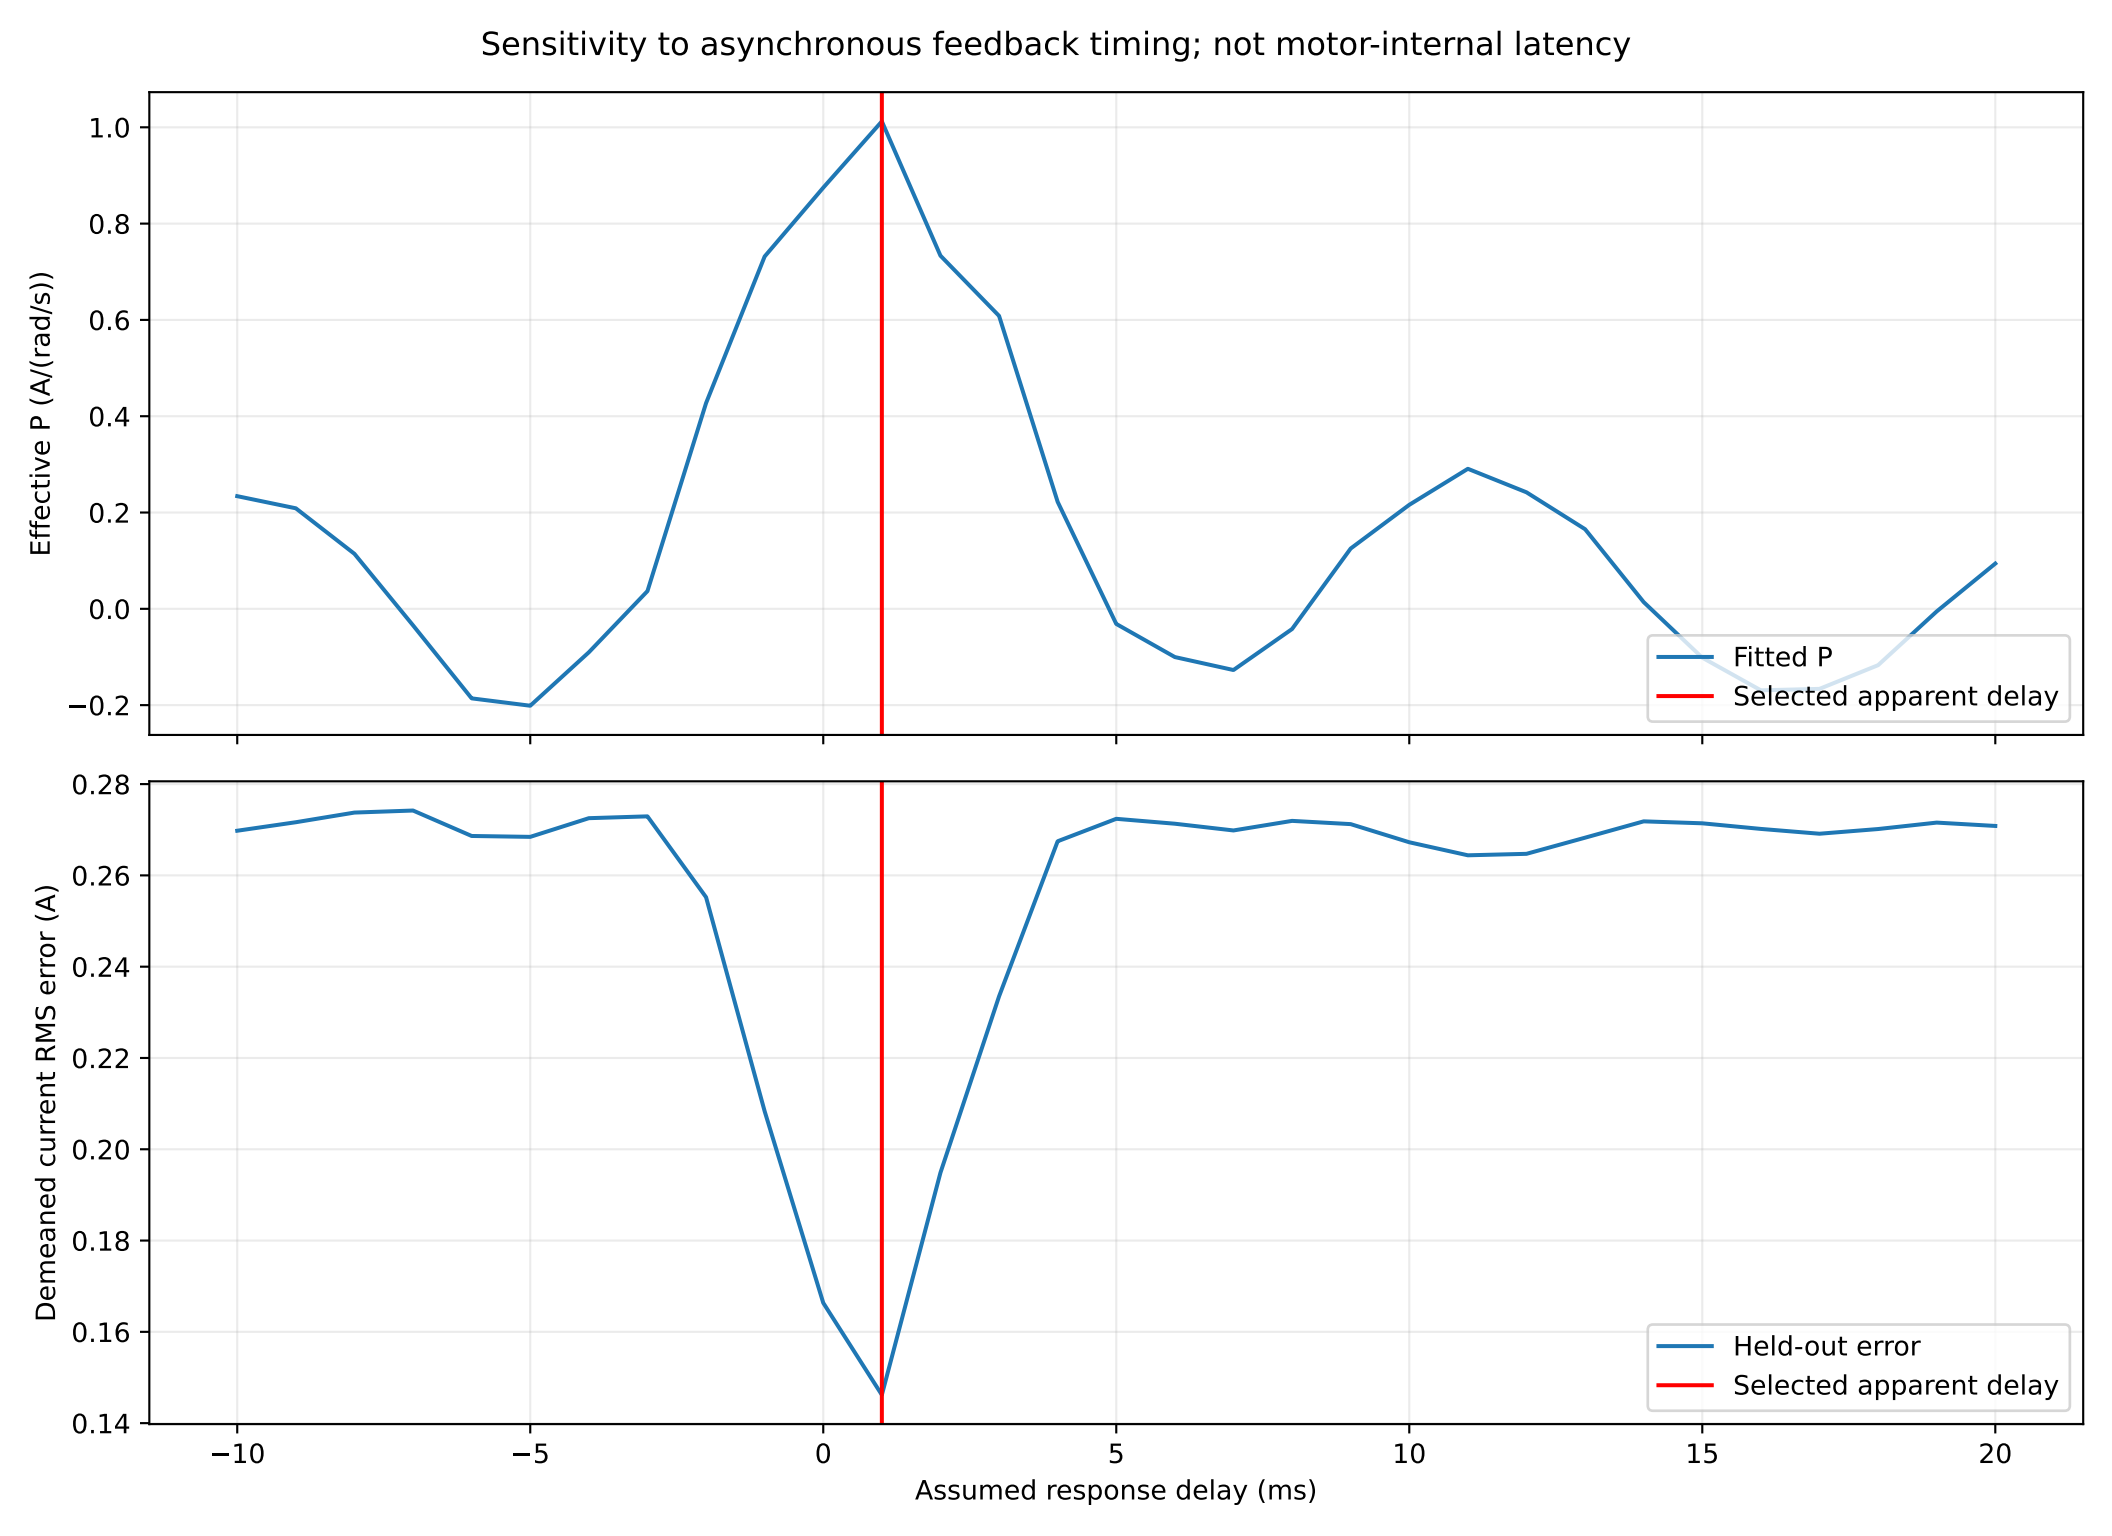
Sensitivity to asynchronous feedback timing; not motor-internal latency
Effective P (A/(rad/s))
1.0
0.8
0.6
0.4
0.2
0.0
−0.2
Fitted P
Selected apparent delay
Demeaned current RMS error (A)
0.28
0.26
0.24
0.22
0.20
0.18
0.16
0.14
Held-out error
Selected apparent delay
−10
−5
0
5
10
15
20
Assumed response delay (ms)