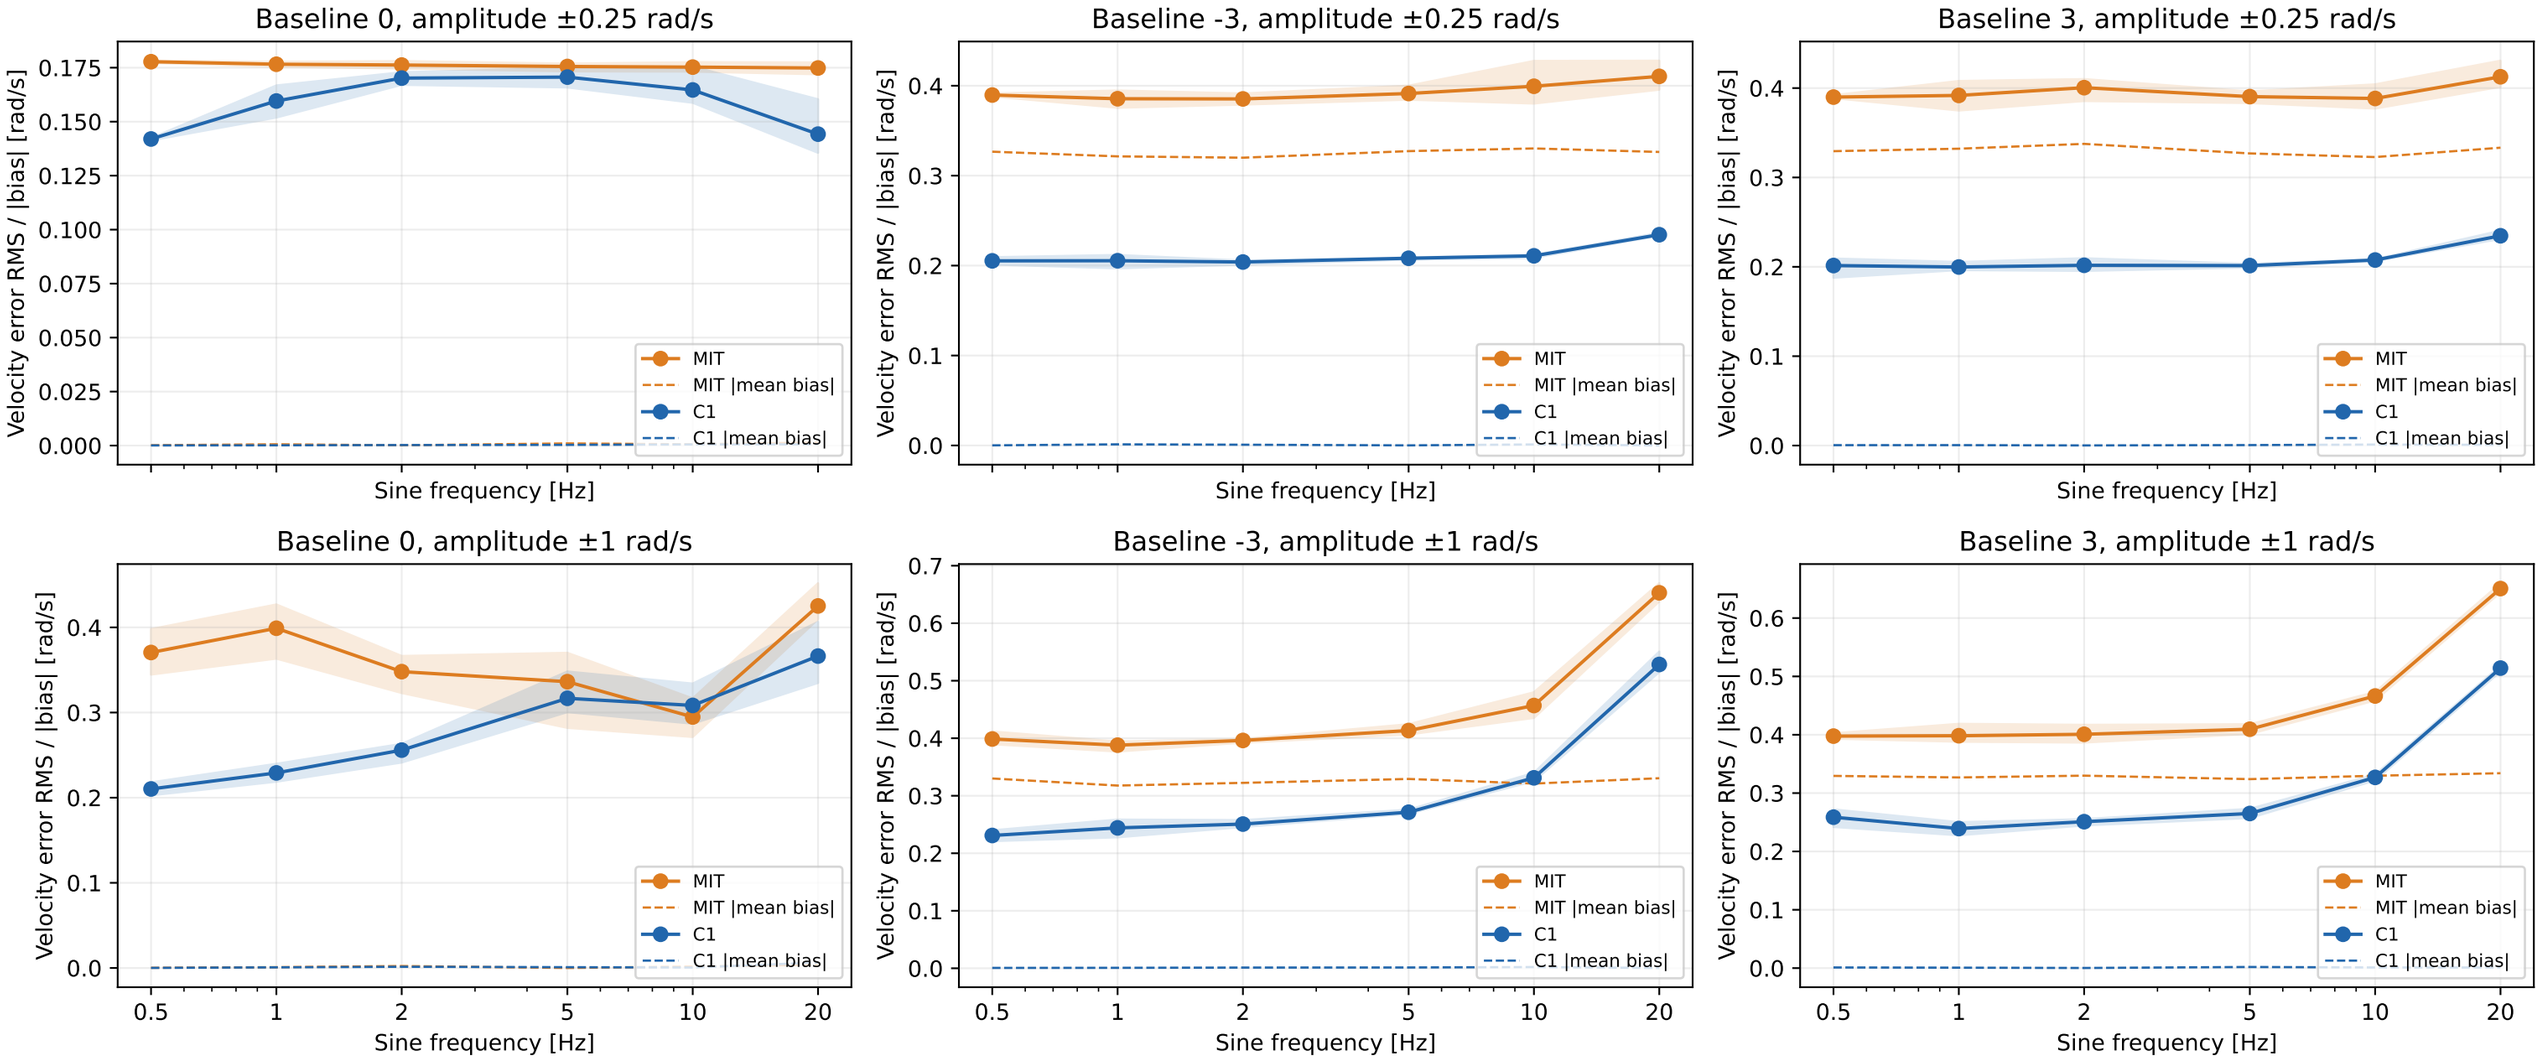
Sine tracking: zero-crossing behavior differs sharply from an already rotating wheel
Baseline 0, amplitude ±0.25 rad/s
Baseline -3, amplitude ±0.25 rad/s
Baseline 3, amplitude ±0.25 rad/s
Baseline 0, amplitude ±1 rad/s
Baseline -3, amplitude ±1 rad/s
Baseline 3, amplitude ±1 rad/s
Velocity error RMS / |bias| [rad/s]
Sine frequency [Hz]
MIT
MIT |mean bias|
C1
C1 |mean bias|
Means and ranges of three repeats. Actual held encoded targets; MIT reference includes zero-FF codec correction. RMS is unshifted and includes mean-speed bias.