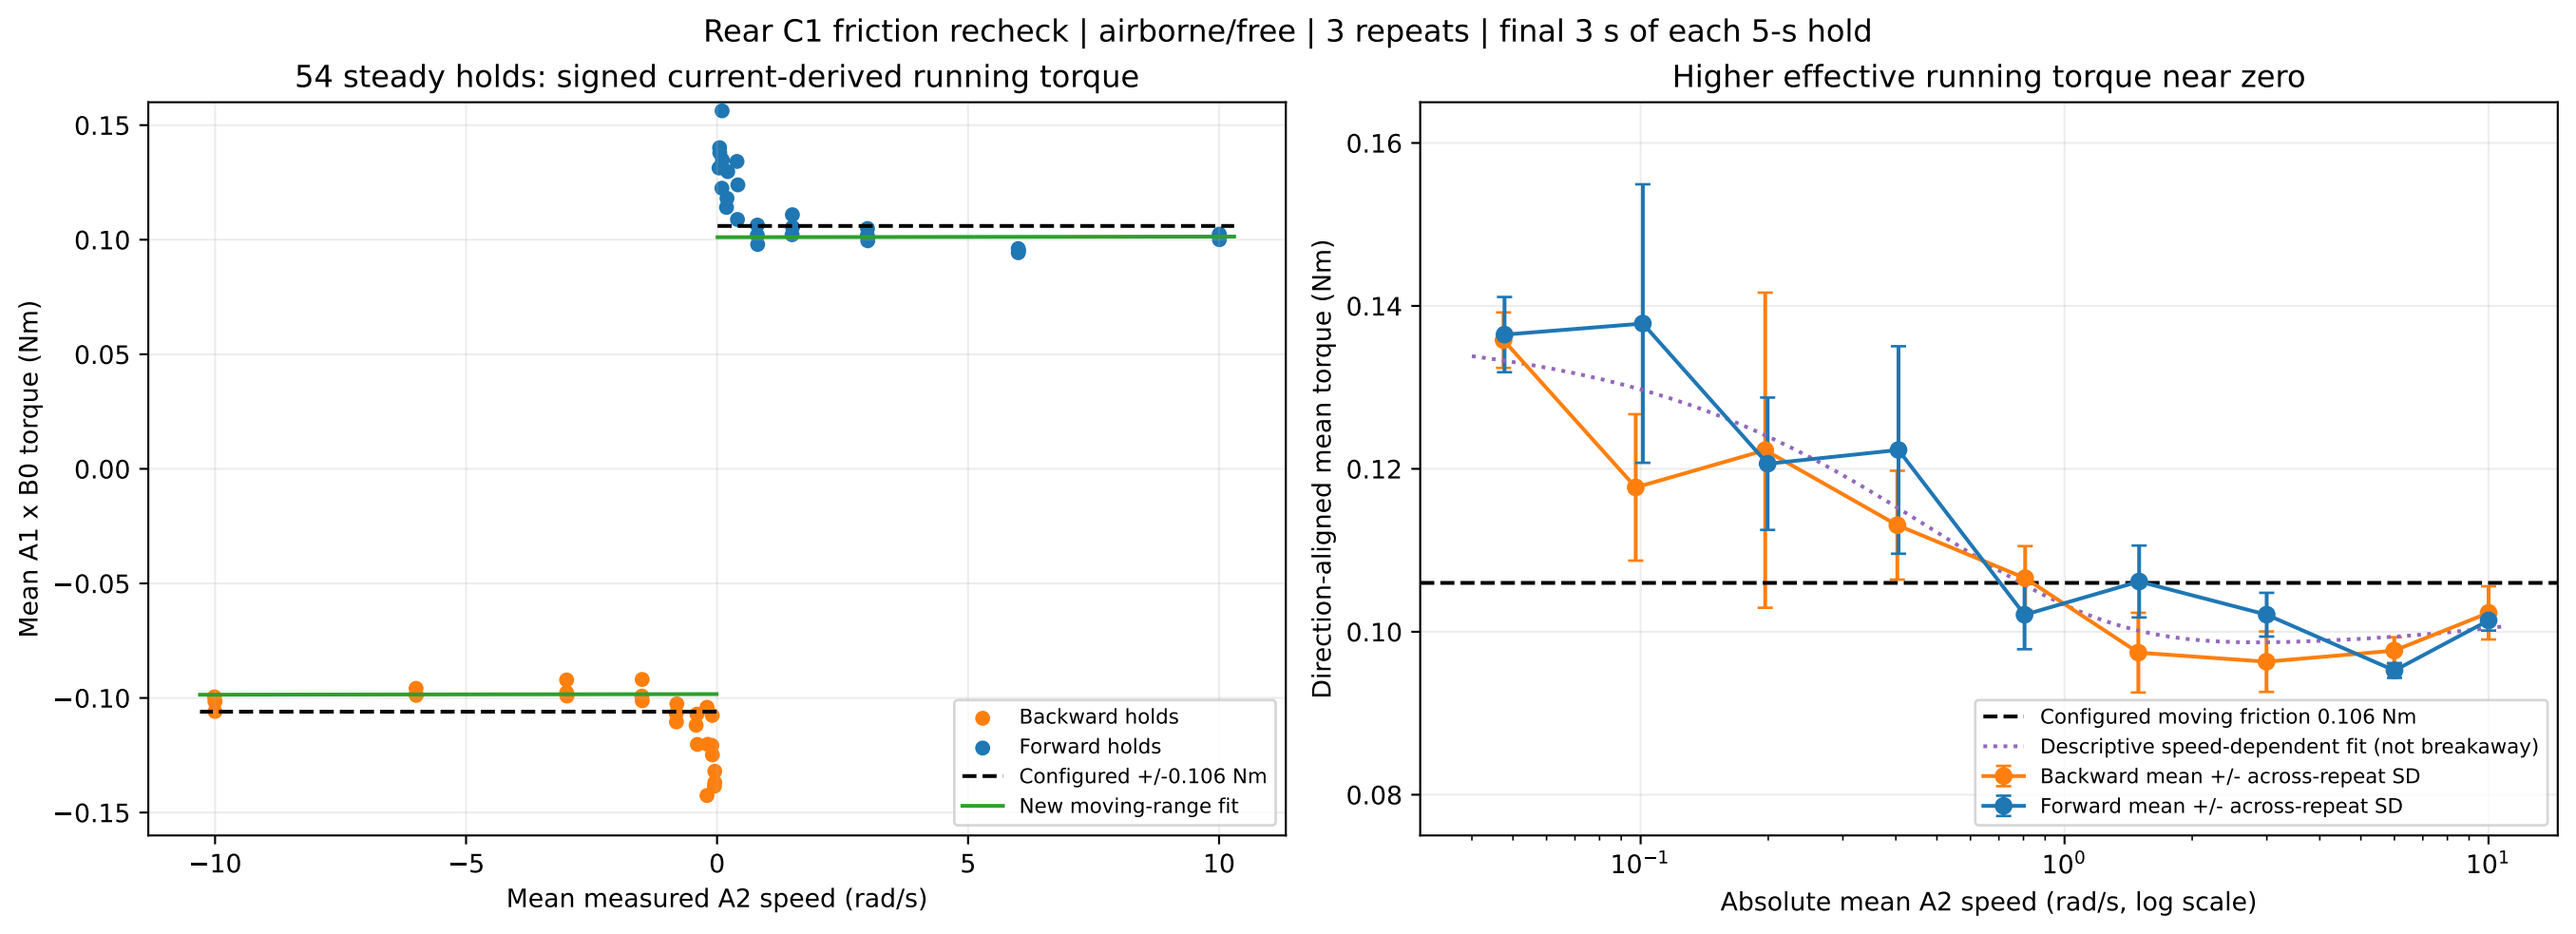
Rear C1 friction recheck | airborne/free | 3 repeats | final 3 s of each 5-s hold
54 steady holds: signed current-derived running torque
Mean A1 x B0 torque (Nm)
Mean measured A2 speed (rad/s)
Backward holds
Forward holds
Configured +/-0.106 Nm
New moving-range fit
Higher effective running torque near zero
Direction-aligned mean torque (Nm)
Absolute mean A2 speed (rad/s, log scale)
Configured moving friction 0.106 Nm
Descriptive speed-dependent fit (not breakaway)
Backward mean +/- across-repeat SD
Forward mean +/- across-repeat SD